

## Manual – performance set Brekr B4000

This manual explains the installation and operation of the performance set for the Brekr B4000. The installation of the performance set is explained in a step-by-step plan on page two of this document. If you have any questions about the installation, please send an email to: [info@vdatuning.com](mailto:info@vdatuning.com).

*The use and consequences of the performance set is entirely at your own risk.*

---

### Operations performance set Brekr B4000

#### Activation performance set:

1. **Put the Brekr in drive mode 4.** In other positions the performance set often does not work. This depends on which software is on the Brekr.
2. **Press the remote control.** Point the remote control towards the built-in performance set.
3. **Drive mode 4 remains permanent.** It is no longer possible to switch to another drive mode. This is the sign that the performance set is active.

#### Deactivation performance set (several ways possible):

1. **Press the remote control again.** Point the remote control again towards the built-in performance set. The Brekr goes automatically into a different drive mode, this is also the sign that the performance set is deactivated. It is possible again to switch to another drive mode.
2. **Press the P button when stationary.** The performance set is deactivated and must be re-enabled.
3. **Fold out the side stand.** The performance set is deactivated and must be re-enabled.
4. **Turn off the Brekr.** The performance set is deactivated and must be re-enabled.



## Installation performance set

**Step 1:** Open the saddle and remove the battery.

**Step 2:** Hump with the Brekr key, the right plate to the front.



**Step 3:**

Bend the plate carefully to the center. Slide the plate out of the left guide rail.



**Step 4:**

Disconnect the JWPF connector using a small flat head screwdriver.




**Step 5:**

Stick the Velcro strip vertically under the GPS cable.




**Step 6:** Connect the cables (see picture). There is only one way possible.

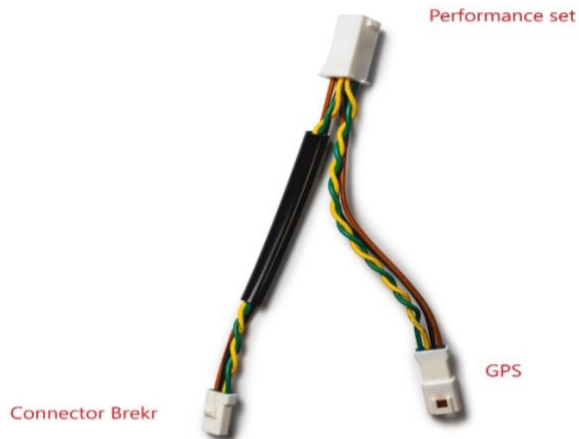

**Step 7:**

Stick the performance set on the Velcro strip.

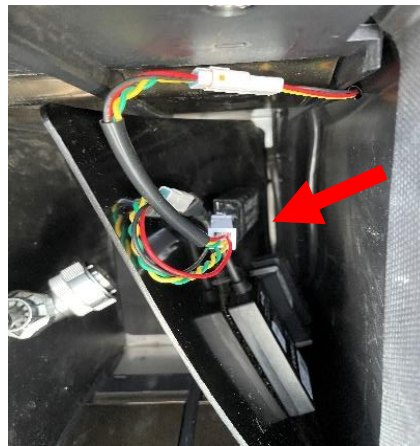

**Step 8:**

Bend the plate to the center and slide the left side back into the guide rail. Press the plate down slightly again so that it returns to its original state.



**Step 9:**

Slide the battery back in and you're ready to go (fast)!

.....