

2023

wiha 
Tools that work for you


PROFESSIONAL TORQUE CONTROL








COMPLETE TORQUE CONTROL PROGRAM



Wiha Torque QuickCheck

DESCRIPTION	Page
 Torque QuickCheck	3

Wiha TorqueControl Tools

DESCRIPTION	Page
 TorqueFix Handle	4
 TorqueVario Handle	4
 TorqueVario Handle (Newton Meter Scale)	4
 Standard Blades Slotted, Phillips, Torx®, TorxPlus®, Hex	5
 MicroBits Slotted, Phillips, Torx®, Security Torx® Hex, Security Hex, Pentalobe & Nut Setters	8
 TorqueControl Sets	9-10

Wiha TorqueControl Blades & Bits



DESCRIPTION	Page
 Standard Blades Slotted, Phillips, Torx®, TorxPlus®, Hex	5
 MicroBits Slotted, Phillips, Torx®, Security Torx® Hex, Security Hex, Pentalobe & Nut Setters	8

Wiha EasyTorque Handles



DESCRIPTION	Page
 EasyTorque Handles	6
 EasyTorque TORX	6
 EasyTorque TORXPlus	6

TorqueVario-S ESD was developed for use in anti-static environments and TorqueVario-S ESD provides safety when working with electronic components. All Wiha TorqueVario-S models have an integrated window scale that displays the torque value - a completely new design, which eliminates false readings. The torque value is continuously adjustable by using the provided adjustment tool (TorqueSetter) this prevents the setting from being altered unintentionally.






Wiha iTorque Handles & Sets

DESCRIPTION	Page
 iTorque Handles	7
 iTorque Sets	7



Wiha TorqueControl Accessories

DESCRIPTION	Page
 TorqueControl Adapters	11
 Torque Cable Key	6



Wiha Torque SlimLine Insulated Tools

DESCRIPTION	Page
 TorqueVario Handle	11
 Insulated Blade Holder	11
 Insulated SlimLine Blades Slotted, Phillips, Terminal, TORX, Square	12
 Ins. Torque SlimLine Sets	13
 Ins TorqueRatchet	14

Wiha TorqueControl T-handle Tools

DESCRIPTION	Page
 T-handle Torque Tools	14
 Blades	14

Wiha TorqueControl ESD Safe Tools

DESCRIPTION	Page
 TorqueVario Handle	8
 ESD Safe Set TorqueVario	9



Maximum Recommended Torque For Wiha Torque Blades

Tip Size	Style	Maximum Torque	
		Nm	in.lbs
T5	TORX	.4 Nm	3.5 in.lbs
T6	TORX	.6 Nm	5.31 in.lbs
T7	TORX	.9 Nm	7.9 in.lbs
T8	TORX	1.3 Nm	11.5 in.lbs
T9	TORX	2.5 Nm	22.1 in.lbs
T10	TORX	3.8 Nm	33.6 in.lbs
T15	TORX	5.5 Nm	48.7 in.lbs
T20	TORX	8.0 Nm	70.8 in.lbs
T25	TORX	8.0 Nm	70.8 in.lbs
IP5	TORX Plus	.5 Nm	4.4 in.lbs
IP6	TORX Plus	.8 Nm	7.0 in.lbs
IP7	TORX Plus	1.3 Nm	11.5 in.lbs
IP8	TORX Plus	2.0 Nm	17.7 in.lbs
IP9	TORX Plus	3.0 Nm	26.5 in.lbs
IP10	TORX Plus	4.5 Nm	39.8 in.lbs
IP15	TORX Plus	6.6 Nm	58.4 in.lbs
IP20	TORX Plus	8.0 Nm	70.8 in.lbs
IP25	TORX Plus	8.0 Nm	70.8 in.lbs
1.5	Slotted	.15 Nm	1.3 in.lbs
2.0	Slotted	.4 Nm	3.5 in.lbs
2.5	Slotted	.4 Nm	3.5 in.lbs
3.0	Slotted	.6 Nm	5.31 in.lbs
3.5	Slotted	1.1 Nm	9.7 in.lbs
4.0	Slotted	2.5 Nm	22.1 in.lbs
#000	Phillips	.4 Nm	3.5 in.lbs
#00	Phillips	.4 Nm	3.5 in.lbs
#0	Phillips	.9 Nm	7.9 in.lbs
#1	Phillips	3.8 Nm	33.6 in.lbs
#2	Phillips	5.5 Nm	48.6 in.lbs
1.5	Hex Metric	.9 Nm	7.9 in.lbs
2.0	Hex Metric	1.8 Nm	15.9 in.lbs
2.5	Hex Metric	3.8 Nm	33.6 in.lbs
3.0	Hex Metric	5.5 Nm	48.6 in.lbs
4.0	Hex Metric	8.0 Nm	70.8 in.lbs
.050	Hex Inch	.4 Nm	3.5 in.lbs
1/16	Hex Inch	.9 Nm	7.9 in.lbs
5/64	Hex Inch	1.8 Nm	15.9 in.lbs
3/32	Hex Inch	1.8 Nm	15.9 in.lbs
7/64	Hex Inch	3.8 Nm	33.6 in.lbs
1/8	Hex Inch	5.5 Nm	48.6 in.lbs
9/64	Hex Inch	8.0 Nm	70.8 in.lbs
5/32	Hex Inch	8.0 Nm	70.8 in.lbs

Wiha Torque QuickCheck

Quickly and easily test the iTorque® and TorqueVario® handles to check the precision of the set torque value before each use. Only suitable for all Wiha torque handles which can be configured to a check value of 2.8 Nm.



28897	Torque QuickCheck		
Includes Torque checker, adapter blades and 2 batteries			
Item			
No.	Nm	pkg.	lbs.
28897	2.8	1	1.49

Wiha torque screwdriver is inserted into Torque QuickCheck along with the enclosed adapter blades to verify how precise the torque tool is. The LED light then clearly indicates the result in traffic light colors.



Wiha Adjustable TorqueControl Tools

Wiha TorqueControl Screwdrivers

- TorqueFix factory preset torque
- TorqueVario adjustable torque drivers

molded cushion grip two component handles allow for maximum achievable torque to be reached with comfort.

Precise repeatability!

All TorqueFix & TorqueVario tools are tested and comply with:

- EN ISO 6789
- BS EN 26789
- ASME B107.14M

Each tool has unique serial number and certificate of calibration

Whether it's TorqueVario-S or TorqueFix - Wiha has a torque screwdriver to cover almost every application



+/-6% accuracy tolerance
Certificate of calibration



Direct Reading Scale



4mm Bit Holder



+/-6% accuracy tolerance Certificate of calibration



+/-6% accuracy tolerance
Certificate of calibration

285 TorqueFix, With Wiha-SoftFinish®
Handle Fixed Torque value pre-set. Tested in accordance with EN ISO 6789, BS EN 26789, ASME B107.14M, tolerance +/- 6%. Audible & perceptible click when pre-set torque has been attained. Automatically resets for next torque cycle; 50% greater reverse torque.

Item No.	Pre-Sets			Scale			Pkg.
	oz.	lbs.	Nm	mm	Inch	lbs.	
28503	80	5	0.56	112	4.4	.16	1
28505	120	7.5	0.84	112	4.4	.15	1
28507	160	10	1.12	119	4.7	.28	1
28509	200	12.5	1.41	119	4.7	.27	1
28511	240	15	1.69	119	4.7	.27	1
28513	320	20	2.25	119	4.7	.28	1
28515	400	25	2.82	126	4.9	.37	1
28517	480	30	3.39	126	4.9	.37	1
28518	560	35	3.95	126	4.9	.37	1
28519	640	40	4.52	126	4.9	.37	1
28521	800	50	5.65	132	5.2	.52	1
28523	960	60	6.78	132	5.2	.52	1

285 Adjustable TorqueVario With Direct Reading Scale EN ISO 6789, BS EN 26789, ASME B107.14M. Ergonomic molded multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible and perceptible click when the torque setting has been attained, automatically resets for next torque cycle. Pkg. 1

Item No.	Range		Scale	
	Inch lbs.	Increments	mm	lbs.
28501*	15 - 80(in/oz)	2.5 In.oz.	127	.22
28502	5 - 10	.5 In.lbs.	127	.41
28506	10 - 50	2 In.lbs.	138	.59

* 28501 +/- 10% (This unit only)*

Item No.	Range		Scale	
	Inch lbs.	Increments	mm	lbs.
28404	5 - 18	1 In.lbs.	131	.50
28408	18 - 62	2 In.lbs.	142	.74

Direct Reading Scale



1/4" Bit Holder



Item No.	Range		Scale	
	Inch lbs.	Increments	mm	
28410*	15 - 80(in/oz)	2.5 In.oz.	127	
28411	5 - 10	.5 In.lbs.	127	
28412	10 - 50	2 In.lbs.	138	
28413	5 - 18	.5 In.lbs.	131	
28414	18 - 62	2 In.lbs.	142	

+/-6% accuracy tolerance Certificate of calibration
* 28410 +/- 10% (This unit only)

285 Adjustable TorqueVario-S Handle - In Newton Meter Scale EN ISO 6789, BS EN 26789, ASME B107.14M. Ergo molded multi-component handle, light & compact. Handle sizes proportioned to optimize torque range. Audible & perceptible click when the torque setting has been attained, automatically resets for next torque cycle. Pkg. 1

Item No.	Newton Meter Scale		Scale	
	Increments	mm	lbs.	
28550*	0.1 - 0.6Nm	.05 Nm	127	.35
28551	0.4 - 1.0Nm	.05 Nm	127	.35
28552	0.5 - 2.0Nm	.10 Nm	131	.45
28553	0.8 - 5.0Nm	.20 Nm	138	.55
28655	2.0 - 7.0Nm	.25 Nm	142	.70

* +/- 10% (This unit only)

+/-6% accuracy tolerance
Certificate of calibration




1/4" Bit Holder



Item No.	Range		Scale	
	Inch lbs.	Increments	mm	
28415*	0.1 - 0.6Nm	.05 Nm	127	
28416	0.4 - 1.0Nm	.05 Nm	127	
28417	0.5 - 2.0Nm	.10 Nm	131	
28418	0.8 - 5.0Nm	.20 Nm	138	
28419	2.0 - 7.0Nm	.25 Nm	142	

* +/- 10% (This unit only)

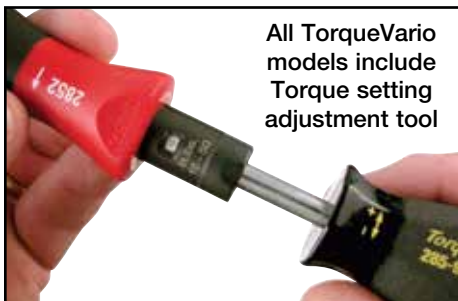

All TorqueVario models include Torque setting adjustment tool

Wiha TorqueControl Blades - For Easy Torque, TorqueFix & TorqueVario Handles



285 Slotted Interchangeable Blades For TorqueFix & TorqueVario Slotted tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

Item						
No.	mm	Inch	mm	lbs.	Nm	pkg.
28534	1.5	.059	175	.07	0.15	1
28535	2.0	.078	175	.07	0.4	1
28536	2.5	.098	175	.07	0.4	1
28537	3.0	.118	175	.07	0.6	1
28538	3.5	.139	175	.07	1.1	1
28539	4.0	.157	175	.07	2.5	1



285 Hex Inch Interchangeable Blades For TorqueFix & TorqueVario Hex tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item					
No.	Inch	mm	lbs.	Nm	pkg.
28555	.050	175	.07	.4	1
28556	1/16	175	.07	.9	1
28557	5/64	175	.07	1.8	1
28558	3/32	175	.07	1.8	1
28559	7/64	175	.07	3.8	1
28560	1/8	175	.07	5.5	1
28587	9/64	175	.07	8.0	1
28588	5/32	175	.07	8.0	1



285 MagicSpring **TORX**® Interchangeable Blades For TorqueFix & TorqueVario blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item						
No.	Size	mm	mm	lbs.	Nm	pkg.
28512	T6	175	4.0	.07	0.6	1
28527	T7	175	4.0	.07	0.9	1
28528	T8	175	4.0	.07	1.3	1
28529	T9	175	4.0	.07	2.5	1
28530	T10	175	4.0	.07	3.8	1
28531	T15	175	4.0	.07	5.5	1



285 Phillips Interchangeable Blades For TorqueFix & TorqueVario Phillips tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

Item						
No.	Size	mm	mm	lbs.	Nm	pkg.
28540	000	175	4.0	.07	0.4	1
28541	00	175	4.0	.07	0.4	1
28542	0	175	4.0	.07	0.9	1
28543	1	175	4.0	.07	3.8	1
28544	2	175	4.0	.07	5.5	1



285 Hex Metric Interchangeable Blades For TorqueFix & TorqueVario Hex tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item					
No.	mm	mm	lbs.	Nm	pkg.
28545	1.5	175	.07	0.9	1
28546	2.0	175	.07	1.8	1
28547	2.5	175	.07	3.8	1
28548	3.0	175	.07	5.5	1
28549	4.0	175	.07	8.0	1



286 MagicSpring **TORXPlus**® Interchangeable Blades For TorqueFix & TorqueVario blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item						
No.	Size	mm	mm	lbs.	Nm	pkg.
28611	IP6	175	4.0	.07	0.8	1
28612	IP7	175	4.0	.07	1.3	1
28613	IP8	175	4.0	.07	2.0	1
28614	IP9	175	4.0	.07	3.0	1
28616	IP10	175	4.0	.07	4.5	1
28617	IP15	175	4.0	.07	6.6	1
28618	IP20	175	4.0	.07	8.0	1
28619	IP25	175	4.0	.07	8.0	1



285 **TORX**® Interchangeable Blades For TorqueFix & TorqueVario **TORX**® tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item						
No.	Size	mm	mm	lbs.	Nm	pkg.
28561	T5	175	4.0	.07	0.4	1
28562	T6	175	4.0	.07	0.6	1
28563	T7	175	4.0	.07	0.9	1
28564	T8	175	4.0	.07	1.3	1
28565	T9	175	4.0	.07	2.5	1
28566	T10	175	4.0	.07	3.8	1
28567	T15	175	4.0	.07	5.5	1
28568	T20	175	4.0	.07	8.0	1
28569	T25	175	4.0	.07	8.0	1



285 **TORXPlus**® Blades For TorqueFix & TorqueVario **TORXPlus**® tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item						
No.	Size	mm	mm	lbs.	Nm	pkg.
28571	IP5	175	4.0	.07	0.5	1
28572	IP6	175	4.0	.07	0.8	1
28573	IP7	175	4.0	.07	1.3	1
28574	IP8	175	4.0	.07	2.0	1
28575	IP9	175	4.0	.07	3.0	1
28576	IP10	175	4.0	.07	4.5	1
28577	IP15	175	4.0	.07	6.6	1
28578	IP20	175	4.0	.07	8.0	1
28579	IP25	175	4.0	.07	8.0	1

*None of the blades featured on this page will function in a TorqueVario Insulated Handle

Wiha TorqueControl Adapters



28882 ESD Safe Bit Holder Adapter For 1/4" Drive Bits

Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item					
No.	Size	mm	mm	lbs.	pkg.
28882	1/4	162	4.0	.09	1

Wiha Torque Cable Keys

Torque handles recommended #28552 & #28504



286 Torque Cable Key For Threaded Hex Connectors

For torque controlled fastening of cable plug connectors with Hex heads. Used with Wiha-TorqueControl Screwdrivers.

Item No.	Size	mm	mm	mm	Max Nm	lbs.	pkg.
28620	8mm	4.0	78	218	1.0	.06	1
28622	9mm	4.0	78	218	1.0	.06	1
28627	13mm	4.0	78	218	1.5	.06	1
28629	14mm	4.0	78	218	1.5	.06	1
28633	18mm	4.0	78	218	1.5	.06	1



easyTorque Control Handles

"easy" Torque

- Audible Click At Torque
- Replaceable Blades
- +/- 10% Repeatability
- Improve Productivity
- Reduces Waste
- Controls Costs
- Save Time!

Each tool factory preset



Economical Torque Control for tooling assembly and repair

Torque accuracy of +/- 10% to 5000 cycles

Reverse torque is 50% greater for easy removal using same tool

Uses 285 Series interchangeable blades on pg. 6



292 easyTorque Screwdriver Handle easyTorque value pre-set. Release accuracy +/- 10%. SoftFinish cushion grip handle for good power transfer.

Item No.	Pre-Sets Inch/lbs.	Nm	mm	Inch	lbs.	pkg.
29205	4.4	0.5	130	5.1	.20	1
29206	5.3	0.6	130	5.1	.20	1
29209	8.0	0.9	130	5.1	.20	1
29211	9.7	1.1	130	5.1	.20	1
29212	10.6	1.2	130	5.1	.20	1
29214	12.4	1.4	130	5.1	.20	1
29220	17.7	2.0	130	5.1	.20	1
29225	22.1	2.5	130	5.1	.20	1
29230	26.6	3.0	130	5.1	.20	1
29238	33.6	3.8	130	5.1	.20	1
29241	35.4	4.0	130	5.1	.20	1
29245	39.8	4.5	130	5.1	.20	1
29251	44.2	5.0	130	5.1	.20	1

* No Calibration Certificates



292 easyTorque Screwdriver Handle With **TORX®** Blades easyTorque value pre-set. Release accuracy +/- 10%. Internal mechanism clicks when torque value has been attained. Cushion grip comfortable handle for good power transfer.

Item No.	Pre-Sets Size	Inch/lbs.	Nm	lbs.	pkg.
29232	T5	4.4	0.5	.24	1
29233	T6	5.3	0.6	.24	1
29234	T7	8.0	0.9	.24	1
29236	T8	10.6	1.2	.25	1
29237	T9	12.4	1.4	.25	1
29239	T10	17.7	2.0	.26	1
29242	T15	26.6	3.0	.26	1
29243	T20	35.4	4.0	.26	1
29244	T25	44.2	5.0	.28	1

* No Calibration Certificates



292 easyTorque Screwdriver Handle With **TORXPlus®** Blades easyTorque value pre-set. Release accuracy +/- 10%. Internal mechanism clicks when torque value has been attained. Cushion grip comfortable handle for good power transfer.

Item No.	Pre-Sets Size	Inch/lbs.	Nm	lbs.	pkg.
29246	IP5	4.4	0.5	.24	1
29247	IP6	5.3	0.6	.24	1
29248	IP7	8.0	0.9	.24	1
29249	IP8	10.6	1.2	.25	1
29252	IP9	12.4	1.4	.25	1
29253	IP10	17.7	2.0	.26	1
29254	IP15	26.6	3.0	.26	1
29255	IP20	35.4	4.0	.26	1
29256	IP25	44.2	5.0	.28	1

* No Calibration Certificates

Wiha TorqueControl Adapters

Adapters For TorqueFix™ & TorqueVario™



28581 Bit Holder Adapter For 1/4" Drive Bits Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item No.	Size	mm	mm	lbs.	pkg.
28581	1/4	149	4.0	.09	1



28582 Square Drive Adapter For 1/4" Sockets Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item No.	Size	mm	mm	lbs.	pkg.
28582	1/4	145	4.0	.08	1



28583 Adapter Blade For 4mm MicroBits Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item No.	Size	mm	mm	lbs.	pkg.
28583	4.0	149	4.0	.09	1

Wiha TorqueControl Adjustable iTorque

iTorque Screwdrivers

- Metric (Nm) & Inch (In-lbs / oz)
- Built in click counter
- Auto shut off
- Fast adjusting
- Cycle Counter
- Accurate +/- 6%

Digital Torque Control



Interchangeable blades or bits

With Certificate of Calibration Included



4mm bit holder included

288 iTorque Screwdriver Handles

EN ISO 6789, BS EN 26789,

ASME B107.14M. Handle reads Nm & Inch/lbs. with built in click counter. Fast adjusting.

Accurate +/- 6% Each iTorque handle includes a 4mm bit holder.

Item No.	Adjustable Maximum Torque		mm	Inch	lbs.
28886	60-210(in/oz.)	40-150(Ncm)	134	5.3	.44
28887	7-26 in/lbs.	0.8-3.0 Nm	134	5.3	.44
28889	9-45 in/lbs.	1.0-6.0 Nm	134	5.3	.44

1/4" bit holder included

288 iTorque Screwdriver Handles

Each iTorque handle includes a 1/4" bit holder.

Item No.	Adjustable Maximum Torque		mm	Inch	lbs.
28883	60-210(in/oz.)	40-150(Ncm)	134	5.3	.44
28884	7-26 in/lbs.	0.8-3.0 Nm	134	5.3	.44
28885	9-45 in/lbs.	1.0-6.0 Nm	134	5.3	.44



Quick Adjusting



Digital Display



Push Button Start Push Button Conversion



Fast Conversion Nm to In/lbs.

With Certificate of Calibration

52 Pc. Set



28891 52 Piece iTorque Bit Set, In Metal Storage Box Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable iTorque handle 60-210 in/oz. 40-150 Ncm, 50 insert bits & 1/4" bit holder.

Item	Slotted: 4.5, 5.5, 6.5, 8.0mm
No.	Phillips: #0, #1, #2, #3
28891	TORX®: T6, T7, T8, T9, T10, T15,
↔	T20, T25, T27, T3
lbs.	Hex Inch: 1/16, 5/64, 3/32, 7/64, 1/8, 2.56
	9/64, 5/32, 3/16"
	Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm
	Pozidriv: #0, #1, #2, #3
	Torq Set: #4, #5, #6, #8
	Square: #1, #2, #3
	Triwing: #0, #1, #2, #3, #4
	iTorque Handle Range 60 - 210 Inch/oz.
	28581 - 1/4" Bit Holder

With Certificate of Calibration

52 Pc. Set



28892 52 Piece iTorque Bit Set, In Metal Storage Box Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable iTorque handle 7-26 in/lbs. 0.8-3.0 Nm, 50 insert bits & 1/4" bit holder.

Item	Slotted: 4.5, 5.5, 6.5, 8.0mm
No.	Phillips: #0, #1, #2, #3
28892	TORX®: T6, T7, T8, T9, T10, T15,
↔	T20, T25, T27, T3
lbs.	Hex Inch: 1/16, 5/64, 3/32, 7/64, 1/8, 2.57
	9/64, 5/32, 3/16"
	Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm
	Pozidriv: #0, #1, #2, #3
	Torq Set: #4, #5, #6, #8
	Square: #1, #2, #3
	Triwing: #0, #1, #2, #3, #4
	iTorque Handle Range 7 - 26 Inch/lbs.
	28581 - 1/4" Bit Holder

With Certificate of Calibration

52 Pc. Set



28896 52 Piece iTorque Bit Set, In Metal Storage Box Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable iTorque handle 9-50 in/lbs. 1.0-6.0 Nm, 50 insert bits & 1/4" bit holder.

Item	Slotted: 4.5, 5.5, 6.5, 8.0mm
No.	Phillips: #0, #1, #2, #3
28896	TORX®: T6, T7, T8, T9, T10, T15,
↔	T20, T25, T27, T3
lbs.	Hex Inch: 1/16, 5/64, 3/32, 7/64, 1/8, 2.61
	9/64, 5/32, 3/16"
	Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm
	Pozidriv: #0, #1, #2, #3
	Torq Set: #4, #5, #6, #8
	Square: #1, #2, #3
	Triwing: #0, #1, #2, #3, #4
	iTorque Handle Range 9 - 45 Inch/lbs.
	28581 - 1/4" Bit Holder

Wiha SYSTEM 4 Micro Bits



750 SYSTEM 4 Slotted Bits High alloy
CVM steel, hardened, on 4 mm hex stock.

Item No.	Size	mm	Inch	lbs.
75008	0.8	28	1.1	.01
75012	1.2	28	1.1	.01
75015	1.5	28	1.1	.01
75018	1.8	28	1.1	.01
75020	2.0	28	1.1	.01
75025	2.5	28	1.1	.01
75030	3.0	28	1.1	.01
75035	3.5	28	1.1	.01
75040	4.0	28	1.1	.01



751 SYSTEM 4 Phillips Bits High alloy
CVM steel, hardened, on 4 mm hex stock.

Item No.	Size	mm	Inch	lbs.
75105	000	28	1.1	.01
75110	00	28	1.1	.01
75115	0	28	1.1	.01
75120	1	28	1.1	.01



753 SYSTEM 4 Hex Inch Bits High alloy
CVM steel, hardened, on 4 mm hex stock.

Item No.	Inch	mm	Inch	lbs.
75307	.028	28	1.1	.01
75309	.035	28	1.1	.01
75313	.050	28	1.1	.01
75350	1/16	28	1.1	.01
75352	5/64	28	1.1	.01
75354	3/32	28	1.1	.01
75356	7/64	28	1.1	.01
75358	1/8	28	1.1	.01
75360	9/64	28	1.1	.01
75340	5/32	28	1.1	.01



757 SYSTEM 4 TORX® Bits High alloy
CVM steel, hardened, on 4 mm stock.

Item No.	Size	mm	Inch	lbs.
75701	T1	28	1.1	.01
75702	T2	28	1.1	.01
75703	T3	28	1.1	.01
75704	T4	28	1.1	.01
75705	T5	28	1.1	.01
75706	T6	28	1.1	.01
75707	T7	28	1.1	.01
75708	T8	28	1.1	.01
75709	T9	28	1.1	.01
75710	T10	28	1.1	.01
75715	T15	28	1.1	.01
75720	T20	28	1.1	.01



753 SYSTEM 4 Hex Metric Bits High alloy
CVM steel, hardened, on 4 mm hex stock.

Item No.	Size	mm	Inch	lbs.
75307	0.7	28	1.1	.01
75309	0.9	28	1.1	.01
75313	1.3	28	1.1	.01
75315	1.5	28	1.1	.01
75320	2.0	28	1.1	.01
75325	2.5	28	1.1	.01
75330	3.0	28	1.1	.01
75340	4.0	28	1.1	.01



757 SYSTEM 4 Pentalobe Bits High alloy

Item No.	Size	mm	Inch	lbs.
75743	PL1	28	1.1	.01
75744	PL2	28	1.1	.01
75745	PL3	28	1.1	.01
75746	PL4	28	1.1	.01
75747	PL5	28	1.1	.01
75748	PL6	28	1.1	.01



753 SYSTEM 4 Metric & Inch Nut Setters

Item No.	Size	mm	Inch	lbs.
75820	2.0	30	1.2	.01
75821	2.5	30	1.2	.01
75822	3.0	30	1.2	.01
75823	3.5	30	1.2	.01
75824	4.0	30	1.2	.01
75825	4.5	30	1.2	.01
75826	5.0	30	1.2	.01
75827	5.5	30	1.2	.01
75810	5/64	30	1.2	.01
75811	3/32	30	1.2	.01
75812	7/64	30	1.2	.01
75813	1/8	30	1.2	.01
75814	9/64	30	1.2	.01
75815	5/32	30	1.2	.01
75816	3/16	30	1.2	.01
75817	7/32	30	1.2	.01

1/4" Drive Micro Bit Tool Adapters



75802 Micro Bit To 1/4" Drive Insert Bit Adapter uses magnets to hold 4mm Micro Bits

Item No.	Size	mm	mm	lbs.
75802	4.0	25	4.0	.01



75803 Long Micro Bit To 1/4" Drive Insert Bit Adapter uses spring clip non-magnetic to hold 4mm Micro Bits

Item No.	Size	mm	mm	lbs.
75803	4.0	38	4.0	.02

ESD Safe Adjustable TorqueControl Tools



285 ESD Safe TorqueVario-S, With Window Scale +/- 6% Accuracy.

Item No.	Range	Increments	mm	lbs.
28522*	15 - 80 (in/oz)	2.5 In.oz.	122-127	.33
28524	5 - 10	.2 In.lbs.	122-127	.34
28426	5 - 18	.5 In.lbs.	126-131	.46



285 ESD Safe TorqueVario-S Newton Meter, With Window Scale +/- 6% Accuracy

Item No.	Range	mm	Inch	lbs.	pkg.
28500	.04 - .46	124	4.875"	.35	1

ESD TorqueVario handle has unique serial number and certificate of calibration



28882 ESD Safe Bit Holder Adapter For 1/4" Drive Bits Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item No.	Size	mm	mm	lbs.	pkg.
28882	1/4	162	4.0	.09	1

Wiha Adjustable TorqueControl Tool Sets In Durable Storage Cases



53 Pc. Set



With Certificate of Calibration

28595	53 Piece TorqueVario-S Bit Set, In Storage Box Set includes ergonomic multi-component adjustable TorqueVario-S handle, 50 Insert bits, 1/4" Bit holder and Torque adjustment tool.
Item	Slotted: 4.5, 5.5, 6.5, 8.0mm
No.	Phillips: #0, #1, #2, #3
28595	TORX®: T6, T7, T8, T9, T10, T15, T20, T25, T27, T30
lbs.	Hex Inch: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16"
2.04	Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm
	Pozidriv®: #0, #1, #2, #3
	Torq Set: #4, #5, #6, #8
	Square: #1, #2, #3
	Tri-Wing: #0, #1, #2, #3, #4
	28506 - Handle Range 10-50 In/lbs.
	28581 - 1/4" Bit Holder



59 Pc. Set



With Certificate of Calibration

28589	59 Piece TorqueVario-S Bit Set, In Storage Box Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes 3 ergonomic multi-component adjustable TorqueVario-S handles, 39 Insert bits, 15 Sockets, 1/4" Bit holder, 1/4" Hex to 1/4" Square adapter and Torque adjustment tool.
Item	Slotted: 4.5, 5.5, 6.0mm
No.	Phillips: #0, #1, #2
28589	TORX®: T5, T6, T7, T8, T9, T10, T15, T20, T25, T30
lbs.	Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4"
2.73	Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0mm
	Pozidriv®: #1, #2
	Square: #1, #2, #3
	Inch Sockets: 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 3/8"
	Metric Sockets: 4.0, 4.5, 5.0, 5.5, 6.0, 7.0, 8.0mm
	3 Handles: 15 - 80 In/oz., 5 - 10 & 10 - 50 In/lbs.
	1/4" Bit Holder
	1/4" Hex to 1/4" Square adapter



59 Pc. Set



With Certificate of Calibration

28689	59 Piece Torque Newton Meter Bit Set, In Storage Box Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes 3 ergonomic multi-component adjustable Torque Nm handles, 39 Insert bits, 15 Sockets, 1/4" Bit holder, 1/4" Hex to 1/4" Square adapter and Torque adjustment tool.
Item	Slotted: 4.5, 5.5, 6.0mm
No.	Phillips: #0, #1, #2
28689	TORX®: T5, T6, T7, T8, T9, T10, T15, T20, T25, T30
lbs.	Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4"
2.73	Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0mm
	Pozidriv®: #1, #2
	Square: #1, #2, #3
	Inch Sockets: 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 3/8"
	Metric Sockets: 4.0, 4.5, 5.0, 5.5, 6.0, 7.0, 8.0mm
	3 Handles: 0.1-0.6 Nm, 0.4-1.0 Nm & 1.0-5.0 Nm
	1/4" Bit Holder
	1/4" Hex to 1/4" Square adapter



With Certificate of Calibration

28591	24 Piece ESD Safe Adjustable TorqueVario-S Bit Set Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool, packed in a compact durable storage box.
Item	Slotted: 1.5, 2.0, 3.0, 4.0mm
No.	Phillips: #00, #0, #1
28591	TORX®: T6, T7, T8, T9, T10, T15
lbs.	Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"
1.57	28524 - Handle ESD Safe Range 5 - 10 Inch lbs.



With Certificate of Calibration

28895	24 Piece ESD Safe Adjustable TorqueVario-S Bit Set
Item No.	Slotted: 0.8, 1.2, 1.5, 2.0mm
28895	Phillips: #000, #00, #0
lbs.	TORX®: T1, T2, T3, T4, T5, T6
1.30	Hex Metric: 0.7, 0.9, 1.3mm
	Pentalobe: PL1, PL2, PL3, PL4
	28500 - Handle ESD Safe .04 - .46Nm (+/-10%)



With Certificate of Calibration

Packed in a compact durable storage box +/- 10%

28890	24 Piece TorqueVario-S ESD Safe Micro-Bit Set
Item	Slotted: 1.5, 2.0, 3.0, 4.0mm
No.	Phillips: #00, #0, #1
28890	TORX®: T6, T7, T8, T9, T10, T15
lbs.	Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"
1.35	28522 - ESD Safe Handle Range 15-80 Inch/oz.

Wiha Adjustable TorqueControl Tool Sets In Durable Storage Box



With Certificate of Calibration

28590 24 Pc. TorqueVario-S Micro-Bit Set Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder & Torque adjustment tool. Packed in a compact durable storage box.

Item No.	Slotted: 1.5, 2.0, 3.0, 4.0mm
	Phillips: #00, #0, #1
28590	TORX : T6, T7, T8, T9, T10, T15
	Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32
lbs.	1.35
	28404 - Handle Range 5 - 18 In/lbs.



With Certificate of Calibration

28593 24 Pc. TorqueVario-S Micro-Bit Set Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder & Torque adjustment tool. Packed in a compact durable storage box.

Item No.	Slotted: 1.5, 2.0, 3.0, 4.0mm
	Phillips: #00, #0, #1
28593	TORX : T6, T7, T8, T9, T10, T15
	Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32
lbs.	1.35
	28501 - Handle Range 15-80 In/oz. (+/- 10%)

Wiha TorqueControl Sets In Durable Canvas Pouch



28596 8 Piece TorqueControl Set With Slotted & Phillips Blades Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 6 blades & Torque adjustment tool. Packed in a durable canvas pouch.

Item No.	28596
	Slotted: 2.5, 3.0, 3.5, 4.0mm
	Phillips: #0, #1
lbs.	1.0
	28404 - Handle Range 5 - 18 In/lbs.

With Certificate of Calibration



28600 20 Piece TorqueControl Set With Slotted, Phillips, **TORX**, Hex Inch Blades Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 18 blades & Torque adjustment tool. Packed in a durable canvas pouch.

Item No.	28600
	Slotted: 2.5, 3.5, 4.0mm
	Phillips: #0, #1, #2
	TORX : T7, T8, T9, T10, T15, T20
lbs.	1.38
	28506 - Handle Range 10 - 50 In/lbs.

With Certificate of Calibration



28597 8 Pc. TorqueControl Set With **TORX** Blades Certified to EN ISO 6789, BS EN 26789, ASME B107.14M

Item No.	28597
	TORX : T7, T8, T9, T10, T15, T20
lbs.	1.01
	28506 - Handle Range 10 - 50 In/lbs.

With Certificate of Calibration



28598 8 Piece TorqueControl Set With **TORXPlus** Blades Certified to EN ISO 6789, BS EN 26789, ASME B107.14M

Item No.	28598
	TORXPlus : IP7, IP8, IP9, IP10, IP15, IP20
lbs.	1.00
	28506 - Handle Range 10 - 50 In/lbs.

With Certificate of Calibration



28599 14 Piece TorqueControl Set With **TORX** & **TORXPlus** Blades Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes Ergonomic multi-component adjustable TorqueVario-S handle, 12 blades & Torque adjustment tool. Packed in a durable canvas pouch.

Item No.	28599
	TORXPlus : IP7, IP8, IP9, IP10, IP15, IP20
	TORX : T7, T8, T9, T10, T15, T20
lbs.	1.25
	28506 - Handle Range 10 - 50 In/lbs.

With Certificate of Calibration




Wiha Insulated TorqueControl Tools



- * Includes Certificate
- * Includes SlimLine blade holder #28350
- * Requires SlimLine Blades

 1000Volt

287 Insulated TorqueVario-S, With Window Scale Insulation  up to 1000Volt. EN/IEC, EN ISO, BS EN, ASME & CSA, +/- 6% Accuracy. Ergonomic multi-component handle, light & compact. Handle sizes proportioned to optimize torque range. Audible & perceptible click when torque setting has been attained. In Plastic Tube Holder

Item No.	Range	Inch	lbs.	Increments	mm	lbs.	pkg.
28750	5 - 18	.5	In/lbs.	126-131	.56	1	
28751	10 - 50	2	In/lbs.	133-138	.74	1	
28752	18 - 62	2	In/lbs.	137-142	.84	1	

287 Insulated TorqueVario-S Handle - In Newton Meter Scale

Item No.	Range	Nm	mm	lbs.	pkg.
28740	0.5 - 2.0	131	.64	1	
28741	0.8 - 5.0	138	.56	1	
28742	2.0 - 7.0	142	.84	1	

Each TorqueVario handle has unique serial number & certificate of calibration




Wiha Insulated TorqueControl Tools

Includes Certificate



 1000V

287 Insulated TorqueVario-S, With Window Scale Insulation  up to 1000Volt EN ISO, BS EN, ASME, VDE, ASTM & NFPA70E standards, +/- 6% Accuracy.

Handle sizes proportioned to optimize torque range. Audible and perceptible click when torque setting has been attained. (Requires Insulated Blade Holder #28350-Not Included)

Item No.	Range	Inch	lbs.	Increments	mm	lbs.	pkg.
28724	5 - 18	.5	In.lbs.	131	.43	1	
28726	10 - 50	2	In.lbs.	138	.40	1	
28727	18 - 62	2	In.lbs.	142	.69	1	

Each TorqueVario handle has unique serial number and certificate of calibration

287 Insulated TorqueVario-S Handle - In Newton Meter Scale (Requires Insulated Blade Holder #28350-Not Included)

Item No.	Range	Nm	mm	lbs.	pkg.
28734	0.5 - 2.0	131	.45	1	
28736	0.8 - 5.0	138	.45	1 (.2 Nm Increment)	
28738	2.0 - 7.0	142	.72	1	


Wiha Insulated SlimLine Torque Blade Holder

 1000Volt



28350 Insulated SlimLine Torque Blade Holder CVM steel. Through hardened black finish. ClicFix quick release holder securely locks blades.

Item No.	OAL	OAL	Inch	lbs.	pkg.
28350	6.0	170	6.75	.06	1

 1000Volt



28316 Insulated SlimLine Torque Blade Holder CVM steel. Through hardened black finish. Blade holder holds blades securely.

Item No.	OAL	OAL	Inch	lbs.	pkg.
28316	6.0	70	2.75	.02	1

Wiha Insulated SlimLine Torque Socket Adapters



 1000Volt

28311 Insulated SlimLine Torque Socket Adapters CVM steel. For 1/4" drive sockets

Item No.	OAL	OAL	Inch	lbs.	pkg.
28311	6.0	57	2.25	.03	1

 1000Volt



28700 Insulated SlimLine Torque Socket Adapters CVM steel. For 1/4" drive sockets

Item No.	OAL	OAL	Inch	lbs.	pkg.
28700	6.0	176	7.0	.06	1

Wiha Insulated SlimLine Blades

Insulation Test Standards:

Insulation according to EN/IEC 60900, ASTM F-1505, VDE 0682/part 201, DIN 7437, NFPA70E & CSA specification


Insulation does not exceed screw head diameter

Integrated Slim Insulation molded directly onto blade

1000 Volt Rated
10,000 Volt Tested

High quality CV steel, through-hardened

SlimTECHNOLOGY
Achieves blade diameters up to 33% narrower utilizing integrated insulation



283 Insulated Slotted SlimLine Blades

SlimLine blades have up to 33% narrower insulation diameter than standard ins. tools.

Item No.	Size	Slim Dia.	Max Dia.	Inch/	lbs.	lbs.	Pkg.
28307	2.5 3/32	4.0	0.4	3.5	.02	1	
28308	3.0 1/8	4.0	0.6	5.3	.02	1	
28310	3.5 9/64	4.0	2.5	22.1	.02	1	
28309	4.0 5/32	4.0	2.5	22.1	.02	1	
28312	5.5 7/32	6.0	3.8	33.6	.02	1	
28315	6.5 1/4	6.0	5.5	48.6	.02	1	



283 Insulated Phillips SlimLine Blades

SlimLine blades have up to 33% narrower insulation diameter than standard ins. tools.

Item No.	Size	Slim Dia.	Max Dia.	Inch/	lbs.	lbs.	Pkg.
28317	1 4.0	3.8	33.7	.02	1		
28319	2 6.0	5.5	48.8	.02	1		



28348 12 Piece Insulated SlimLine Blade Set With Belt Holder

Up to 33% narrower insulation diameter than standard insulated tools. SlimLine blade holder holds 12 SlimLine blades.

Item No.	Slotted: 4.0, 5.5mm
28348	Phillips: #1, #2
	Hex: 2.5, 3.0, 4.0mm
lbs.	TORX®: T15, T20, T25
.42	Square: #1, #2



283 Insulated Pozidriv® SlimLine Blades

SlimLine blades have up to 33% narrower insulation diameter than standard ins. tools.

Item No.	Size	Slim Dia.	Max Dia.	Inch/	lbs.	lbs.	Pkg.
28330	1 4.0	3.8	33.7	.02	1		
28331	2 6.0	5.5	48.8	.02	1		



283 Insulated Xeno Slotted/Pozidriv® SlimLine Blades

Up to 33% narrower insulation diameter than standard ins. tools.

Item No.	Size	Slim Dia.	Max Dia.	Inch/	lbs.	lbs.	Pkg.
28320	1 4.0	3.8	33.6	.02	1		
28321	2 6.0	5.5	48.7	.02	1		



283 Insulated Xeno Slotted/Phillips SlimLine Blades

Up to 33% narrower insulation diameter than standard insulated tools.

Item No.	Size	Slim Dia.	Max Dia.	Inch/	lbs.	lbs.	Pkg.
28327	1 4.0	3.8	33.6	.02	1		
28329	2 6.0	5.5	48.7	.02	1		



283 Insulated Square SlimLine Blades

Up to 33% narrower insulation diameter than standard insulated tools.

Item No.	Size	Slim Dia.	Max Dia.	Inch/	lbs.	lbs.	Pkg.
28346	1 4.0	3.8	33.6	.02	1		
28347	2 6.0	5.5	48.7	.02	1		



283 Insulated TORX® SlimLine Blades

Up to 33% narrower insulation diameter than standard insulated tools.

Item No.	Size	Slim Dia.	Max Dia.	Inch/	lbs.	lbs.	Pkg.
28325	T6 4.0	.6	5.31	.02	1		
28326	T7 4.0	.9	7.9	.02	1		
28339	T8 4.0	1.3	11.5	.02	1		
28344	T9 4.0	1.3	11.5	.02	1		
28340	T10 4.0	3.8	33.6	.02	1		
28341	T15 6.0	5.5	48.7	.02	1		
28342	T20 6.0	5.5	48.7	.02	1		
28343	T25 6.0	5.5	48.7	.02	1		



283 Insulated Hex Metric SlimLine Blades

Up to 33% narrower insulation diameter than standard insulated tools.

Item No.	Size	Slim Dia.	Max Dia.	Inch/	lbs.	lbs.	Pkg.
28332	1.5 4.0	0.9	7.9	.02	1		
28333	2.0 4.0	1.8	15.9	.02	1		
28334	2.5 4.0	3.8	33.6	.02	1		
28335	3.0 4.0	5.5	48.7	.02	1		
28336	4.0 6.0	5.5	48.7	.02	1		
28337	5.0 6.0	5.5	48.7	.02	1		
28338	6.0 6.0	5.5	48.7	.02	1		



28372 7 Piece SlimLine Blade Set

High quality CV steel, through hardened, black finish.

Item No.	Slotted: 2.5, 3.5, 5.5mm	lbs.
28372	Phillips: #1, #2	.14
	Square: #1, #2	.14



28373 7 Piece SlimLine Blade Set

High quality CV steel, through hardened, black finish.


Item No.	Slotted: 2.5, 3.5, 5.5mm	lbs.
28373	Phillips: #1, #2	.14
	Xeno Sit/Ph: #1, #2	.14

Insulated Torque & SlimLine Tool Sets

 **1000Volt**




28791 8 Piece Insulated TorqueControl Set With Slotted & Phillips SlimLine Blades Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes Insulated multi-component adjustable TorqueVario-S handle, 5 SlimLine blades, SlimLine blade holder & Torque adjustment tool.

Item No.	
28791	SlimLine Slotted: 3.0, 4.0, 5.5mm
	SlimLine Phillips: #1, #2
lbs.	28726 - Handle Range 10-50 In/lbs.
.87	SlimLine Blade Holder

With Certificate of Calibration




28795 12 Pc. Insulated TorqueControl Set With SlimLine Blades Certified to EN ISO, BS EN, ASME. Set includes Insulated multi-component adjustable TorqueVario-S Nm handle, SlimLine Blade Holder Handle, 8 SlimLine blades, SlimLine blade holder & Torque adjustment tool.

Item No.	
28795	SlimLine Slotted: 4.0, 5.5, 6.5mm
	SlimLine Phillips: #1, 2
	SlimLine Pozidriv®: #1, 2
	SlimLine Terminal Xeno SI/Pz: #2
	28736 - Handle Range 0.8 - 5.0 Nm
	SlimLine Blade Holder Handle
	SlimLine Blade Holder
	lbs. 1.32

With Certificate of Calibration




28789 11 Pc. Insulated TorqueControl Set With SlimLine Blades Certified to EN ISO, BS EN, ASME. Set includes Insulated multi-component adjustable TorqueVario-S 10-50 In/lbs. handle, 8 SlimLine blades, SlimLine blade holder & Torque adjustment tool. In Clamshell

Item No.	Slotted: 4.0, 6.5mm
	Phillips: #1, 2
28789	Square: #1, 2
	Terminal Xeno SI/Pz: #1, 2
lbs.	Torque Handle Range 10-50 In/lbs.
1.32	SlimLine Blade Holder 6.75" OAL

With Certificate of Calibration



28781 20 Piece Insulated TorqueControl Set With SlimLine Blades Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes Insulated multi-component adjustable TorqueVario-S handle, SoftFinish® SlimLine blade handle, PicoFinish® SlimLine blade holder, 15 SlimLine blades, SlimLine blade holder & Torque adjustment tool. In Clamshell

Item No.	Slotted: 2.5, 3.5, 4.0, 6.5mm
	Phillips: #1, 2 (qty. 2 of #2)
28781	Terminal Xeno Sit/Ph: #1, 2
	TORX®: T10, T15, T20, T25
lbs.	Square: #1, 2
1.61	Handle Range 10-50 In/lbs.
	SlimLine SoftFinish® Blade Holder
	PicoFinish® SlimLine Holder
	SlimLine Blade Holder 6.75" OAL

 **1000Volt**



28792 16 Piece Insulated TorqueControl Set With SlimLine Blades Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes Insulated multi-component adjustable TorqueVario-S handle, 13 SlimLine blades, SlimLine blade holder & Torque adjustment tool.

Item No.	
28792	SlimLine Slotted: 4.0, 5.5, 6.5mm
	SlimLine Phillips: #1, #2
lbs.	SlimLine Terminal Xeno: #1, 2
1.27	SlimLine TORX®: T8, T10, T15, T20
	SlimLine Square: #1, #2
	28727 - Handle Range 18-62 Inch/lbs.
	SlimLine Blade Holder

With Certificate of Calibration



Wiha Insulated Torque Ratchet Wrenches



#30138



#30114

1000Volt

301 Insulated Torque Ratchet Wrenches, 1/4, 3/8, 1/2" Drives Insulated to EN/IEC 60900:2004, ASTM F1505-10, CSA Standards Visible reading scale for easy reading and adjustment. Locking endcap Torque adjuster for easy adjustment. Accuracy +/- 10%. Dual scale reading Ft. lbs. / Nm.

Item No.	OAL	OAL			
No.	Inch	mm	Inch	Nm	lbs.
30114	1/4"	210	8.25	5-25	1.02
30138	3/8"	370	14.5	5-50	2.72
30152	1/2"	530	21.0	40-220	3.64



1000Volt

30190 16 Pc. Inch Insulated 3/8" Drive Ratcheting Torque Wrench & Socket Set CV steel, forged, oil-hardened sockets.

Item No.	3/8" Drive Sockets:
30190	1/4, 9/32, 5/16, 11/32, 3/8, 7/16
	1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8"
	3/8" x 125mm Extension Bar
8.80	3/8" x 250mm Extension Bar
	3/8" Drive Ratcheting Torque Wrench -
	5-50 Nm

*Sockets must be used with insulated ratchets & extensions



1000Volt

30192 16 Pc. Metric Insulated 3/8" Drive Ratcheting Torque Wrench & Socket Set

Item No.	3/8" Drive Sockets:
30192	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20mm
	3/8" x 125mm Extension Bar
8.80	3/8" x 250mm Extension Bar
	3/8" Drive Ratcheting Torque Wrench -
	5-50 Nm

*Sockets must be used with insulated ratchets & extensions

T-handle TorqueControl Handles



Accuracy Ergonomic multi-component handle, light & compact

Includes Calibration Certificate

289 TorqueFix T-handle EN ISO 6789, BS EN 26789, ASME B107.14M, +/- 6%

Item No.	Torque In-lbs.	Torque Nm	mm x mm	lbs.	pkg.
28931	53.1	6	56 x 120	.81	1
28933	70.8	8	56 x 120	.82	1
28935	88.5	10	56 x 120	.79	1
28937	106.2	12	56 x 120	.79	1
28938	110.6	12.5	56 x 120	.80	1
28939	123.9	14	56 x 120	.80	1

Each TorqueFix T-handle has unique serial number and certificate of calibration



Includes Calibration Certificate

28940 Adjustable TorqueVario STplus T-handle EN ISO 6789, BS EN 26789, ASME B107.14M, +/- 6%

Item No.	Torque Nm	Torque In-lbs.	mm x mm	lbs.	pkg.
28940	5-14	44.3-123.9	56 x 120	.81	1

*(1 Nm 8.8507) (Scale is shown in Nm only)

T-handle TorqueControl Blades



289 TORX Interchangeable Blades For TorqueFix T-Handle TORX tip blades on 6mm Hex shafts. High alloy CVM steel, hardened, hard chromed.

Item No.	Size	mm	Inch	mm	lbs.	pkg.
28903	T15	130	5.1	6.0	.10	1
28904	T20	130	5.1	6.0	.10	1
28905	T25	130	5.1	6.0	.11	1
28906	T27	130	5.1	6.0	.11	1
28907	T30	130	5.1	6.0	.11	1
28908	T40	130	5.1	6.0	.11	1



289 Hex Metric Interchangeable Blades For TorqueFix T-Handle Hex tip blades on 6mm Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item No.	Size	mm	Inch	mm	lbs.	pkg.
28916	3.0	130	5.1	.11	.11	1
28917	4.0	130	5.1	.11	.11	1
28918	5.0	130	5.1	.11	.11	1
28919	6.0	130	5.1	.11	.11	1



289 TORXPlus Interchangeable Blades For TorqueFix T-Handle TORXPlus tip blades on 6mm Hex shafts. High alloy CVM steel, hardened, hard chromed.

Item No.	Size	mm	Inch	mm	lbs.	pkg.
28910	IP15	130	5.1	6.0	.10	1
28911	IP20	130	5.1	6.0	.10	1
28912	IP25	130	5.1	6.0	.11	1
28913	IP27	130	5.1	6.0	.11	1
28914	IP30	130	5.1	6.0	.11	1

Wiha T-handle TorqueControl Adapters



289 TorqueFix Adapter For 1/4" & 3/8" Sockets Shaft CVM steel, hardened, corrosion protected.

Item No.	Size	mm	Inch	mm	lbs.	pkg.
28926	1/4	100	3.9	6.0	.12	1



28925 TorqueFix Quick Release Bit Holder Shaft CVM steel, hardened, corrosion protected.

Item No.	Size	mm	Inch	mm	lbs.	pkg.
28925	1/4	125	4.9	6.0	.15	1

Numerical Index by Item Number

Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page
28307	12	28501	4	28563	5	28738	11	29209	6	75320	8
28308	12	28502	4	28564	5	28740	11	29211	6	75325	8
28309	12	28503	4	28565	5	28741	11	29212	6	75330	8
28310	12	28505	4	28566	5	28742	11	29214	6	75340	8
28311	11	28506	4	28567	5	28750	11	29220	6	75350	8
28312	12	28507	4	28568	5	28751	11	29225	6	75352	8
28315	12	28509	4	28569	5	28752	11	29230	6	75354	8
28316	11	28511	4	28571	5	28781	13	29232	6	75356	8
28317	12	28512	5	28572	5	28789	13	29233	6	75358	8
28319	12	28513	4	28573	5	28791	13	29234	6	75360	8
28320	12	28515	4	28574	5	28792	13	29236	6	75701	8
28321	12	28517	4	28575	5	28795	13	29237	6	75702	8
28325	12	28518	4	28576	5	28882	5,8	29238	6	75703	8
28326	12	28519	4	28577	5	28883	7	29239	6	75704	8
28327	12	28521	4	28578	5	28884	7	29241	6	75705	8
28329	12	28522	8	28579	5	28885	7	29242	6	75706	8
28330	12	28523	4	28581	6	28886	7	29243	6	75707	8
28331	12	28524	8	28582	6	28887	7	29244	6	75708	8
28332	12	28527	5	28583	6	28889	7	29245	6	75709	8
28333	12	28528	5	28587	5	28890	9	29246	6	75710	8
28334	12	28529	5	28588	5	28891	7	29247	6	75715	8
28335	12	28530	5	28589	9	28892	7	29248	6	75720	8
28336	12	28531	5	28590	10	28895	9	29249	6	75743	8
28337	12	28534	5	28591	9	28896	7	29251	6	75744	8
28338	12	28535	5	28593	10	28897	3	29252	6	75745	8
28339	12	28536	5	28595	9	28903	14	29253	6	75746	8
28340	12	28537	5	28596	10	28904	14	29254	6	75747	8
28341	12	28538	5	28597	10	28905	14	29255	6	75748	8
28342	12	28539	5	28598	10	28906	14	29256	6	75802	8
28343	12	28540	5	28599	10	28907	14	30114	14	75803	8
28344	12	28541	5	28600	10	28908	14	30138	14	75810	8
28346	12	28542	5	28611	5	28910	14	30152	14	75811	8
28347	12	28543	5	28612	5	28911	14	30190	14	75812	8
28348	12	28544	5	28613	5	28912	14	30192	14	75813	8
28350	11	28545	5	28614	5	28913	14	75008	8	75814	8
28372	12	28546	5	28616	5	28914	14	75012	8	75815	8
28373	12	28547	5	28617	5	28916	14	75015	8	75816	8
28404	4	28548	5	28618	5	28917	14	75018	8	75817	8
28408	4	28549	5	28619	5	28918	14	75020	8	75820	8
28410	4	28550	4	28620	6	28919	14	75025	8	75821	8
28411	4	28551	4	28622	6	28925	14	75030	8	75822	8
28412	4	28552	4	28627	6	28926	14	75035	8	75823	8
28413	4	28553	4	28629	6	28931	14	75040	8	75824	8
28414	4	28555	5	28633	6	28933	14	75105	8	75825	8
28415	4	28556	5	28689	9	28935	14	75110	8	75826	8
28416	4	28557	5	28700	11	28937	14	75115	8	75827	8
28417	4	28558	5	28724	11	28938	14	75120	8		
28418	4	28559	5	28726	11	28939	14	75307	8		
28419	4	28560	5	28727	11	28940	14	75309	8		
28426	8	28561	5	28734	11	29205	6	75313	8		
28500	8	28562	5	28736	11	29206	6	75315	8		



PROFESSIONAL TORQUE CONTROL



99002 Screwdrivers Catalog




99001 TorqueControl Catalog




99919 Insulated Catalog



99951 Bits Catalog

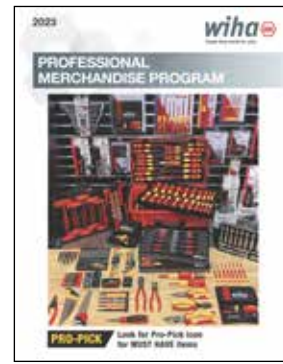

99007 Merchandise Catalog

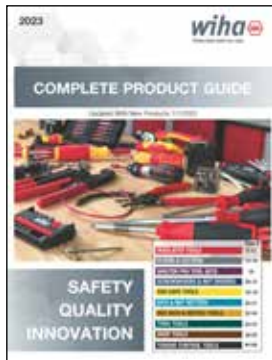

99060 Product Guide

	<p>Wiha Quality Tools</p> <p>1348 Dundas Circle Monticello, MN 55362 tel: 763.295.6591 fax: 763.295.6598</p>	<p>Wiha Tools Canada Ltd.</p> <p>www.wihatools.com Brampton, ONT tel: 866.494.0096 or 763.295.6591 fax: 763.295.6598</p>
	<p>To:</p>	

(800) 494-6104 | fax: (800) 494-7456
cservice@wihatools.com | www.wihatools.com

Catalog Item No. 99001
version - 1/1/2023

Subject to change without notice

©2023 Willi Hahn Corporation

©Torx is a registered trademark of Acument Intellectual Properties LLC.