

ASSEMBLY GUIDE



REFERENCE:

- A. Seat
- B. Column
- C. Base
- D. Wheels
- E. Column Float

APPROXIMATE TIME:


15 minutes

STEP BY STEP:


Next Page 

Full color version of this guide by scanning the QR code below:



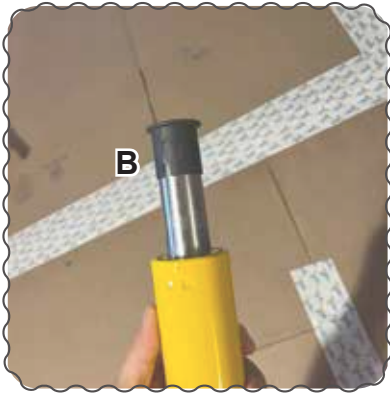


STEP 1: remove rubber/tape cap from "B" center column.

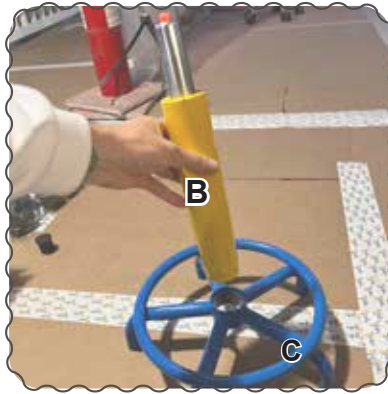


STEP 2: Place "C" base flat on ground. Slot "B" into the center opening in "C" without pushing too hard down so it's resting in hole but not jammed in.




STEP 3: Slot "E" over center column "B" aligning opening arches on radial base bars.

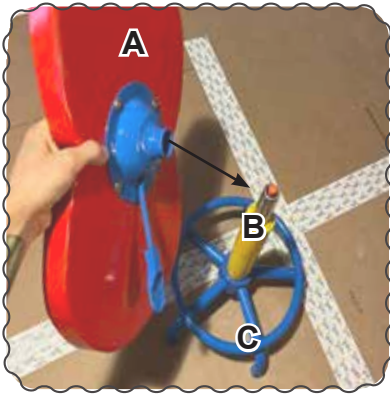


STEP 4: Grab seat "A" and slot center plate opening underneath seat onto the column "B" making sure that "B" and "C" are on a flat surface and plumb to the ground. **DO NOT PUSH DOWN HARD YET.**

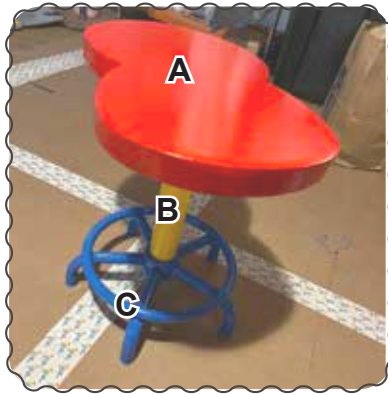

STEP 5: Your stool should look like this, with "A" resting on "B" just lightly, and "B" resting inside slot of "C" lightly.

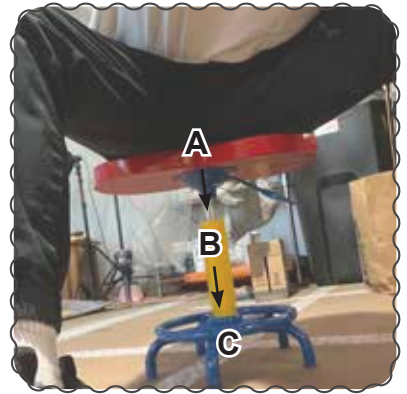

STEP 6: Making sure the seat and column of the stool are aligned vertically and that the base is on a flat surface, apply weight either by sitting or with hands onto stool locking in "A" to "B" and "B" to "C."

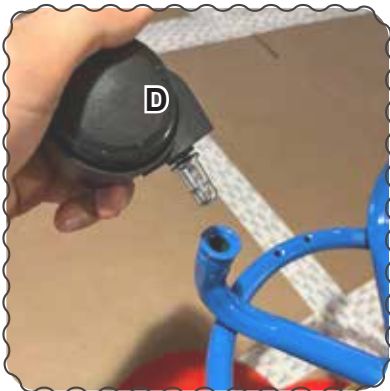

STEP 7: Invert your stool and attached wheels into base "C" in the holes. Wheels will click lightly when attached properly, just push them in with your hands. Wheels should not come out once placed inside.

DONE! →

