



EDGE



02 |


CAR AUDIO
2017



EDGE

ΑΥΤΟΤΑ

**LIVE IT,
BY IT**

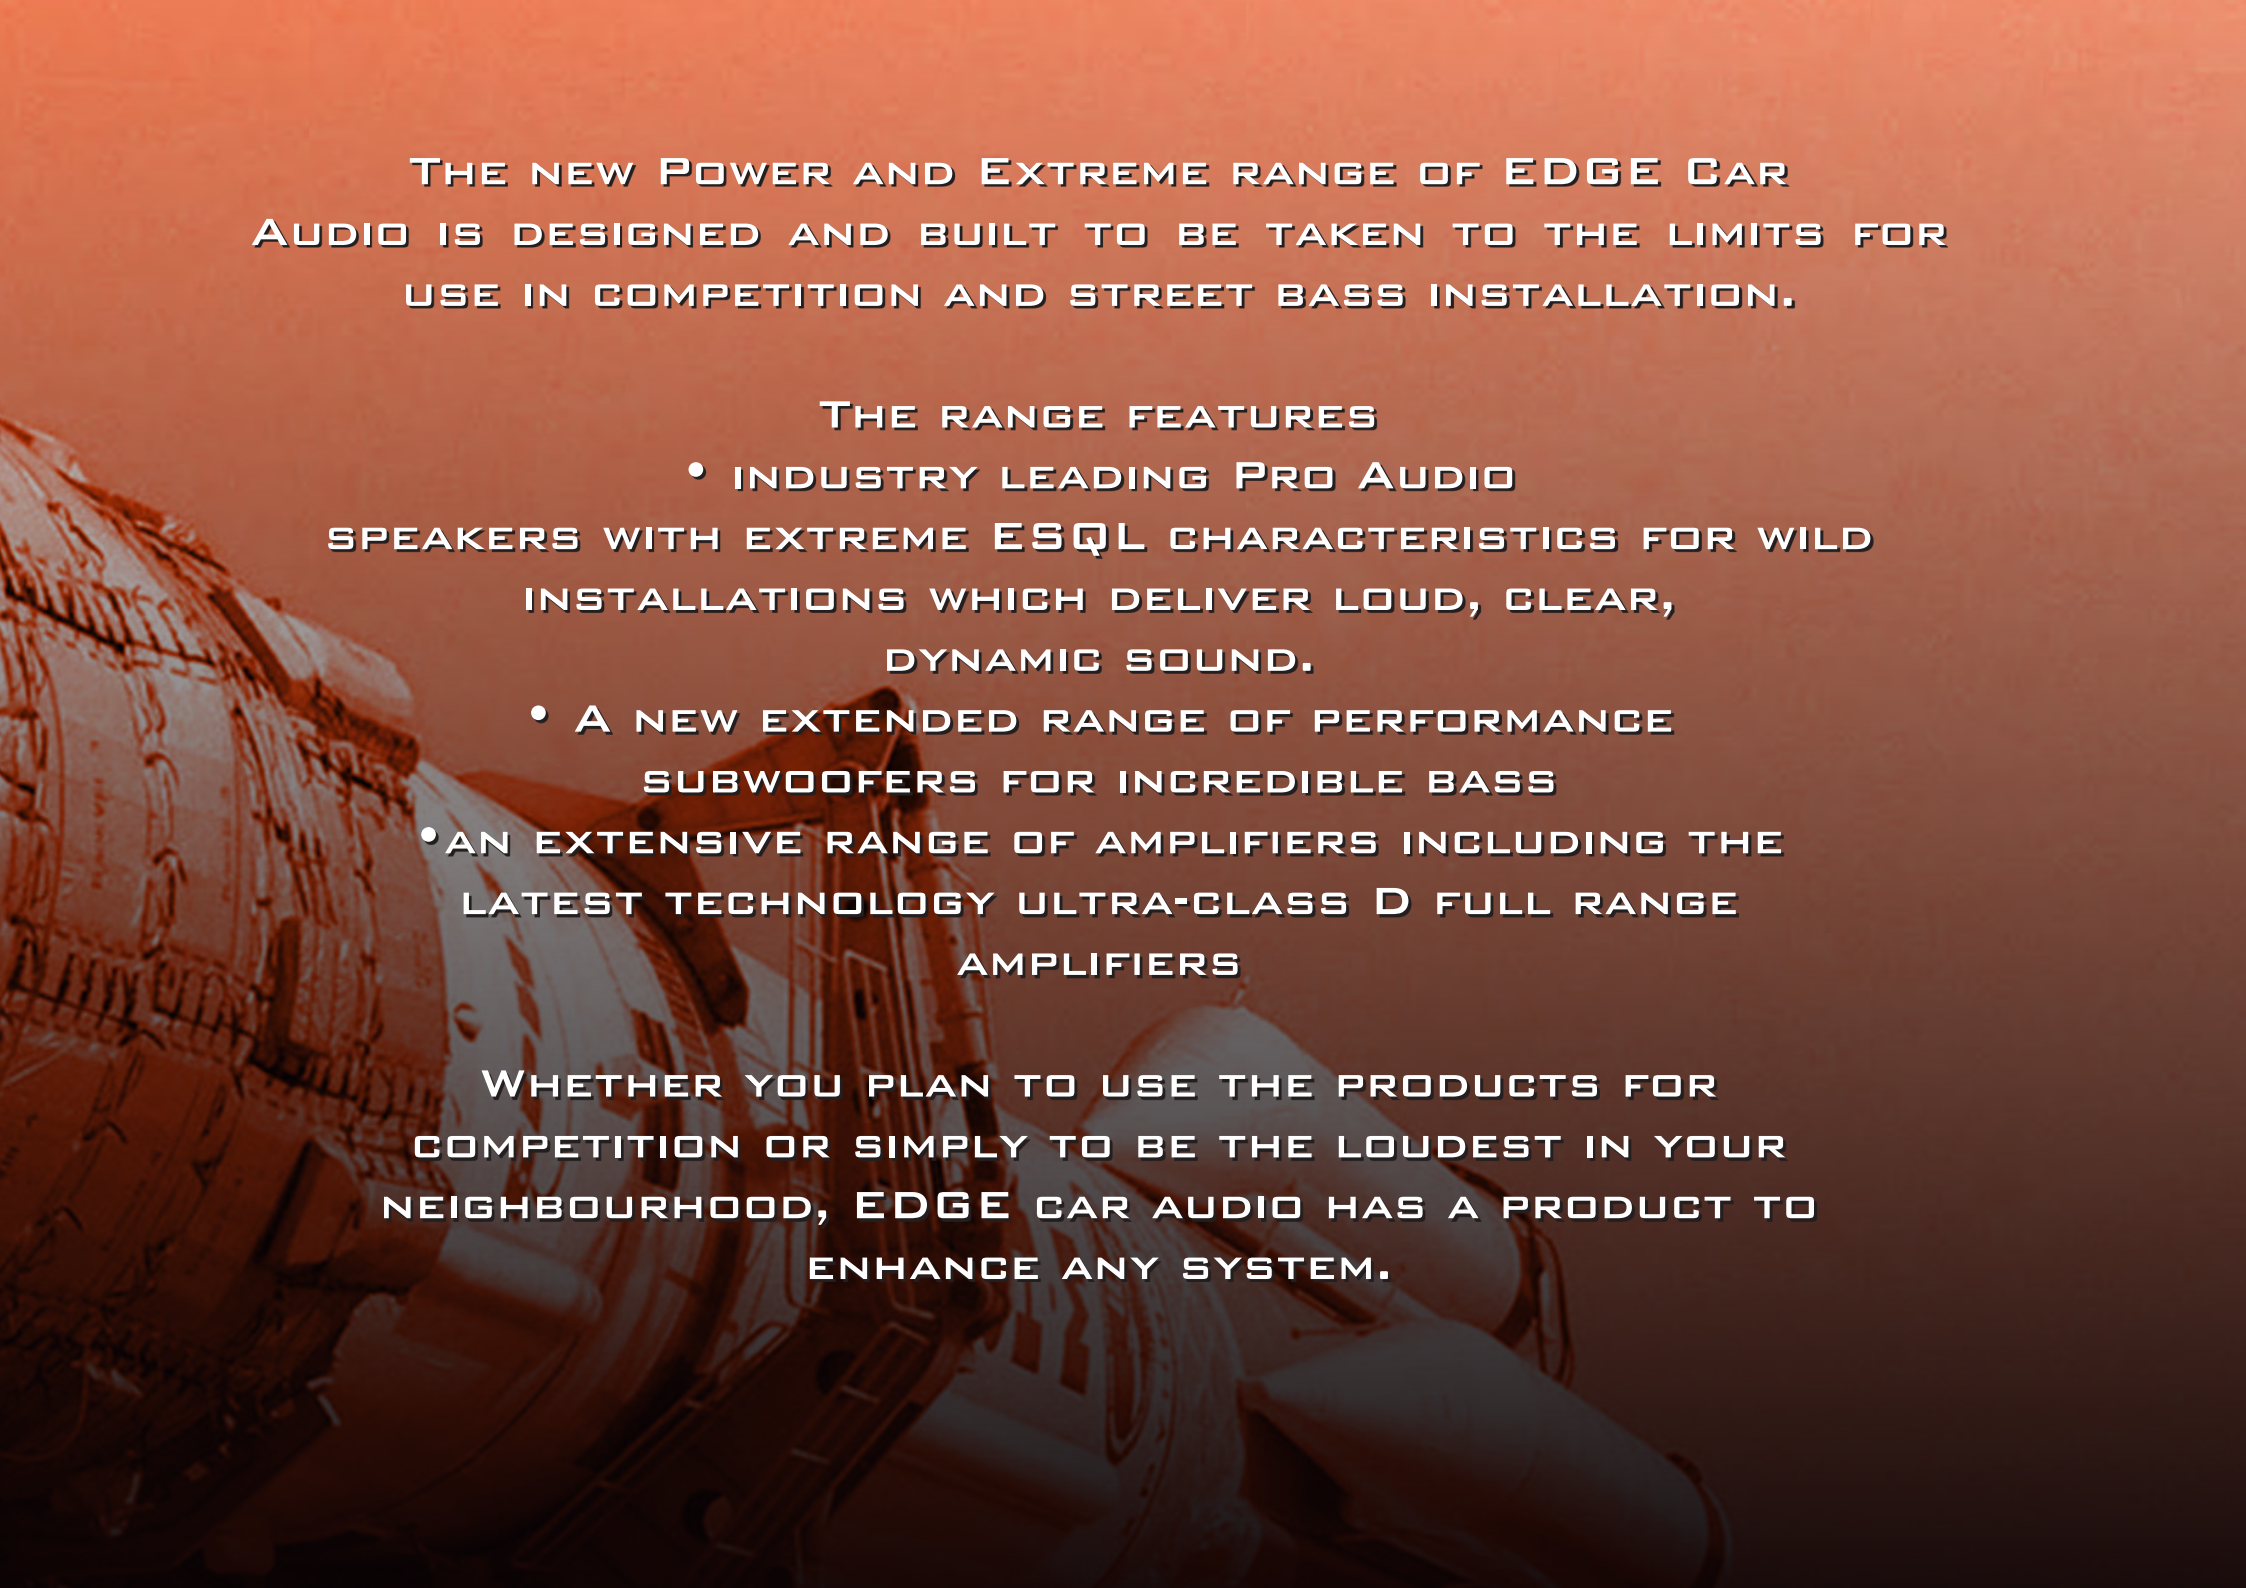

THE NEW POWER AND EXTREME RANGE OF EDGE CAR
AUDIO IS DESIGNED AND BUILT TO BE TAKEN TO THE LIMITS FOR
USE IN COMPETITION AND STREET BASS INSTALLATION.

THE RANGE FEATURES

- INDUSTRY LEADING PRO AUDIO
SPEAKERS WITH EXTREME ESQ L CHARACTERISTICS FOR WILD
INSTALLATIONS WHICH DELIVER LOUD, CLEAR,
DYNAMIC SOUND.
- A NEW EXTENDED RANGE OF PERFORMANCE
SUBWOOFERS FOR INCREDIBLE BASS
- AN EXTENSIVE RANGE OF AMPLIFIERS INCLUDING THE
LATEST TECHNOLOGY ULTRA-CLASS D FULL RANGE
AMPLIFIERS

WHETHER YOU PLAN TO USE THE PRODUCTS FOR
COMPETITION OR SIMPLY TO BE THE LOUDEST IN YOUR
NEIGHBOURHOOD, EDGE CAR AUDIO HAS A PRODUCT TO
ENHANCE ANY SYSTEM.

EDGE

EDB COAXIAL SPEAKER RANGE



- ▶ 2 Way Coaxial Speaker Configuration
- ▶ PEI tweeter Element
- ▶ IMPP Woofer Cone
- ▶ Multifit design allows fitment in 99% of Vehicles

SPECIFICATION

MODEL	ED522B-E7	ED622B-E7
TYPE	COAXIAL	COAXIAL
CONFIGURATION	2-WAY	2-WAY
SPEAKER SIZE	5.25" (130MM)	6.5" (165MM)
RMS POWER	50 WATTS	60 WATTS
PEAK POWER	120 WATTS	120 WATTS
MINIMUM INPUT (RMS)	25 WATTS	30 WATTS
SENSITIVITY	91DB	91DB
FREQUENCY RESPONSE	80HZ - 20KHZ	65HZ - 20KHZ
IMPEDANCE	4Ω	4Ω
MOUNTING DEPTH	2" (50MM)	2.1" (53MM)
MOUNTING DIAMETER	4.6" (117MM)	5"6 (141MM)
RECOMMENDED AMPLIFIERS	EDA100.4-E7	EDA100.4-E7

ED2-E1 COAXIAL SPEAKER RANGE



- ▶ 4 Way Coaxial Speaker Configuration
- ▶ PEI tweeter Element
- ▶ Electroplated IMPP Woofer Cone
- ▶ Removeable Steel Mesh Grill
- ▶ Multifit design allows fitment in 99% of Vehicles

SPECIFICATION

MODEL	ED204-E1	ED205-E1	ED206-E1	ED209-E1
TYPE	COAXIAL	COAXIAL	COAXIAL	COAXIAL
CONFIGURATION	4-WAY	4-WAY	4-WAY	4-WAY
SPEAKER SIZE	4" (100MM)	5.25" (130MM)	6.5" (165MM)	6x9" (150 X 220MM)
RMS POWER	40 WATTS	50 WATTS	60 WATTS	100 WATTS
PEAK POWER	120 WATTS	150 WATTS	180 WATTS	300 WATTS
MINIMUM INPUT (RMS)	20 WATTS	25 WATTS	30 WATTS	50 WATTS
SENSITIVITY	90DB	91DB	91DB	90DB
FREQUENCY RESPONSE	100HZ - 20KHZ	80HZ - 20KHZ	65HZ - 20KHZ	45HZ - 20KHZ
IMPEDANCE	4Ω	4Ω	4Ω	4Ω
MOUNTING DEPTH	1.7" (44MM)	2" (50MM)	2.1" (53MM)	3.1" (78MM)
MOUNTING DIAMETER	3.7" (95MM)	4.6" (117MM)	5"6 (141MM)	5.9" (149MM) X 8.7" (222MM)
RECOMMENDED AMPLIFIERS	ED7300-E2, ED7600-E2	ED7300-E2, ED7600-E2	ED7300-E2, ED7600-E2	ED7300-E2, ED7600-E2

EDST2-E6 COAXIAL SPEAKER RANGE

EDST2-E6 COMPONENT SPEAKER RANGE



- ▶ 2 and 3 Way Coaxial Speaker Configuration
- ▶ PEI tweeter Element
- ▶ IMPP Woofer Cone
- ▶ Removeable Steel Mesh Grill
- ▶ Multifit design allows fitment in 99% of Vehicles

- ▶ 2 Way Component Speaker Configuration
- ▶ Silk dome tweeter Element
- ▶ Electroplated IMPP Woofer Cone
- ▶ Removeable Steel Mesh Grill
- ▶ Multifit design allows fitment in 99% of Vehicles

SPECIFICATION

MODEL	EDST214-E6	EDST215-E6	EDST216-E6	EDST219-E6
TYPE	COAXIAL	COAXIAL	COAXIAL	COAXIAL
CONFIGURATION	2-WAY	2-WAY	2-WAY	3-WAY
SPEAKER SIZE	4" (100MM)	5.25" (130MM)	6.5" (165MM)	6X9" (150 X 220MM)
RMS POWER	40 WATTS	50 WATTS	60 WATTS	100 WATTS
PEAK POWER	80 WATTS	100 WATTS	120 WATTS	200 WATTS
MINIMUM INPUT (RMS)	20 WATTS	25 WATTS	30 WATTS	50 WATTS
FREQUENCY RESPONSE	100HZ - 20KHZ	80HZ - 20KHZ	65HZ - 20KHZ	45HZ - 20KHZ
IMPEDANCE	4 OHM	4 OHM	4 OHM	4 OHM
MOUNTING DEPTH	1.6" (40MM)	1.6" (41MM)	2" (50MM)	3.1" (79MM)
MOUNTING DIAMETER	3.7" (93MM)	5.5" (116MM)	5.5" (140MM)	5.7" (145MM) X 8.5" (215MM)
RECOMMENDED AMPLIFIERS	ED7300-E2 ED7600-E2	ED7300-E2 ED7600-E2	ED7300-E2 ED7600-E2	ED7300-E2 ED7600-E2

SPECIFICATION

MODEL	EDST215C-E6	EDST216C-E6
TYPE	COMPONENT	COMPONENT
CONFIGURATION	2-WAY	2-WAY
SPEAKER SIZE	5.25" (130MM)	6.5" (165MM)
RMS POWER	60 WATTS	70 WATTS
PEAK POWER	120 WATTS	140 WATTS
MINIMUM INPUT (RMS)	30 WATTS	30 WATTS
FREQUENCY RESPONSE	80HZ - 20KHZ	65HZ - 20KHZ
IMPEDANCE	4Ω	4Ω
MOUNTING DEPTH	1.6" (41MM)	2" (50MM)
MOUNTING DIAMETER	5.5" (116MM)	5.5" (140MM)
RECOMMENDED AMPLIFIERS	ED7300-E2 ED7600-E2	ED7300-E2 ED7600-E2

EDGE

ED512D4-E4




- 12" (323mm) Subwoofer
- Wide Roll Foam Surround
- Rms Power 400 Watts
- Peak Power 1600 Watts
- Minimum Input 200 Watts Rms
- 50mm Voice Coil
- 100oz Double Stacked Magnet

TS PARAMETERS

RECV	3.6 OHMS	VAS	57.728 LTR
FO	32.6HZ	CMS	155.866 UM/N
SD	51.1 CM2	KRM	8.992 MOHMS
BL	10.8TM	ERM	0.711
QMS	5.705	MMS	152.204G
QES	0.958	MMD	145.568G
QTS	0.820	KXM	19.798MH
ND	0.203%	EXM	0.650
SPL	85.1DB	X-MECH	20MM

FREQUENCY RESPONSE

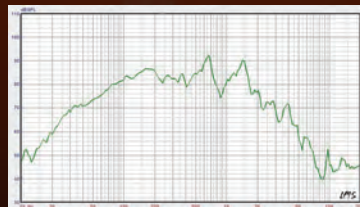

EDP122SPL-E6




- 12" (323mm) Subwoofer
- Ultra Wide Roll Foam Surround
- Rms Power 1500 Watts
- Peak Power 4500 Watts
- Minimum Input 750 Watts Rms
- 75mm Voice Coil
- 132oz Double Stacked Magnet

TS PARAMETERS

RECV	3.6 OHMS	VAS	17.020 LTR
FO	37.5HZ	CMS	52.928 UM/N
SD	47.144 CM2	KRM	14.211 MOHMS
BL	21.98TM	ERM	0.830
QMS	6.667	MMS	334.435G
QES	0.587	MMD	328.550G
QTS	0.539	KXM	101.433MH
ND	0.148%	EXM	0.645
SPL	83.7DB	X-MECH	36MM

FREQUENCY RESPONSE

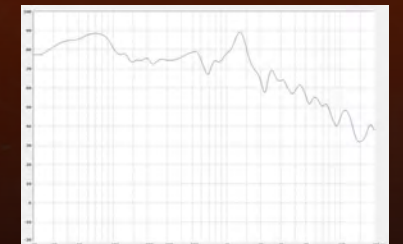

EDP122-E6



- 12" (323mm) Subwoofer
- Ultra Wide Roll Foam Surround
- Rms Power 2500 Watts
- Peak Power 7500 Watts
- Minimum Input 1250 Watts Rms
- 75mm Voice Coil
- 280oz Double Stacked Magnet

TS PARAMETERS

RECV	3.6 OHMS	VAS	9.739 LTR
FO	49.5HZ	CMS	30.860 U/M/N
SD	47.144 CM2	KRM	17.289 MOHMS
BL	27.22TM	ERM	0.805
QMS	5.665	MMS	334.435G
QES	0.506	MMD	334.435G
QTS	0.464	KXM	140.877MH
ND	0.226%	EXM	0.600
SPL	85.60B	X-MECH	44.5MM

FREQUENCY RESPONSE



EDP152SPL-E6



- 15" (392mm) Subwoofer
- Ultra Wide Roll Foam Surround
- Rms Power 4000 Watts
- Peak Power 12,000 Watts
- Minimum Input 2000 Watts Rms
- 100mm Voice Coil
- 360oz Triple Stacked Magnet

TS PARAMETERS

RECV	4 OHMS	VAS	24.728 LTR
FO	40.2HZ	CMS	32.622 U/M/N
SD	73.062 CM2	KRM	24.860 MOHMS
BL	29.895TM	ERM	0.799
QMS	6.066	MMS	480.851G
QES	0.543	MMD	469.496G
QTS	0.499	KXM	190.618MH
ND	0.286%	EXM	0.593
SPL	86.60B	X-MECH	50MM

FREQUENCY RESPONSE



EDGE

EDA POWER AMPLIFIER RANGE



- Class AB Power Amplifiers
- Onboard Active Crossovers
- High Level Input with Auto Turn on Function
- Variable Bass Boost Circuit
- Anodised Extruded Aluminium Heatsink

SPECIFICATION

MODEL	EDA100.4-E7	EDA150.4-E7	EDA200.4-E7	EDA350.2-E7
CONFIGURATION	4 CHANNEL	4 CHANNEL	4 CHANNEL	2 CHANNEL
DIMENSIONS (H X W X D)	58MM (2.3") X 280MM (11.1") X 224MM (8.8")	58MM (2.3") X 310MM (12.2") X 330MM (8.8")	58MM (2.3") X 350MM (13.8") X 224MM (8.8")	58MM (2.3") X 350MM (13.8") X 224MM (8.8")
RMS @ 4Ω STEREO	4 X 80W	4 X 100W	4 X 150W	2 X 250W
RMS @ 2Ω STEREO	4 X 100W	4 X 150W	4 X 200W	2 X 350W
RMS @ 4Ω MONO	2 X 200W	2 X 300W	2 X 400W	1 X 700W
MAXIMUM POWER	800W	1200W	1600W	1400W
FREQUENCY RESPONSE	20HZ - 20KHZ	20HZ - 20KHZ	20HZ - 20KHZ	20HZ - 20KHZ
CROSSOVER TYPE	LP / HP / FLAT	LP / HP / FLAT	LP / HP / FLAT	LP / HP / FLAT
CROSSOVER RANGE	30HZ - 250HZ	30HZ - 250HZ	30HZ - 250HZ	30HZ - 250HZ
RECOMMENDED FUSE	2 X 20A	2 X 25A	2 X 30A	2 X 30A
TOPOLOGY	CLASS AB	CLASS AB	CLASS AB	CLASS AB

EDSH COMPETITION AMPLIFIER RANGE



- Ultra Class D Delivers Incredible Efficiency Of Up To 92%
- Wide Frequency Response Allows Use With Not Only Subwoofers But Also Full Range Speaker Systems.
- Unique Combination FET Technology Delivers Improved Heat Dissipation.
- Full EMI And CE Approval

SPECIFICATION

MODEL	EDSH4000.1D-E6	EDSH7000.1D-E6	EDSH10000.1D-E6
CONFIGURATION	COMPETITION MONOBLOCK	COMPETITION MONOBLOCK	COMPETITION MONOBLOCK
DIMENSIONS (H X W X D)	2.7" X 12.6" X 8.9" (68MM X 320MM X 225MM)	2.7" X 16.1" X 8.9" (68MM X 410MM X 225MM)	2.7" X 21.3" X 8.9" (68MM X 540MM X 225MM)
RMS @ 4Ω (14.4V 1% THD)	1650 WATTS	3000 WATTS	3470 WATTS
RMS @ 2Ω (14.4V 1% THD)	2800 WATTS	4900 WATTS	7200 WATTS
RMS @ 1Ω (14.4V 1% THD)	4000 WATTS	7000 WATTS	10500 WATTS
MAXIMUM POWER	8000 WATTS	14000 WATTS	21000 WATTS
FREQUENCY RESPONSE	5HZ - 20KHZ	5HZ - 20KHZ	5HZ - 20KHZ
CROSSOVER TYPE	LP / HP	LP / HP	LP / HP
CROSSOVER RANGE	10HZ - 15KHZ	10HZ - 15KHZ	10HZ - 15KHZ
INPUT SENSITIVITY	200mV - 5V	200mV - 5V	200mV - 5V
EFFICIENCY	92%	92%	92%
OPERATING VOLTAGE	9V DC - 15V DC	9V DC - 15V DC	9V DC - 15V DC
RECOMMENDED FUSE RATING	300A	600A	1000A
TOPOLOGY	ULTRA CLASS D	ULTRA CLASS D	ULTRA CLASS D

EDA CLASS AB COMPETITION AMPLIFIER RANGE



- Class AB Delivers Best Possible Sound Quality
- 1 Ohm Stereo Operation For Low Impedance Loads
- High Pass, Low Pass And Bandpass Active Crossover
- Wideband 10Hz - 5kHz Crossover
- Full EMI And CE Approval

SPECIFICATION

MODEL CONFIGURATION	EDA4500.2AB-E6 COMPETITION 2CH AMPLIFIER	EDA2000.4AB-E6 COMPETITION 4CH AMPLIFIER
DIMENSIONS (H x W x D)	2.3" x 33.9" x 9.9" (58MM x 860MM x 251MM)	2.3" x 26" x 9.9" (58MM x 660MM x 251MM)
RMS @ 4Ω STEREO (14.4V 1% THD)	2 x 850 WATTS	4 x 210 WATTS
RMS @ 2Ω STEREO (14.4V 1% THD)	2 x 1450 WATTS	4 x 350 WATTS
RMS @ 1Ω STEREO (14.4V 1% THD)	2 x 2250 WATTS	4 x 500 WATTS
RMS @ 4Ω MONO (14.4V 1% THD)	1 x 2900 WATTS	2 x 700 WATTS
RMS @ 2Ω MONO (14.4V 1% THD)	1 x 4500 WATTS	2 x 1000 WATTS
MAXIMUM POWER	9000 WATTS	4000 WATTS
FREQUENCY RESPONSE	5HZ - 20KHZ	5HZ - 20KHZ
CROSSOVER TYPE	LP / HP / BP	LP / HP / BP
CROSSOVER RANGE	10HZ - 5KHZ	10HZ - 5KHZ
INPUT SENSITIVITY	200MV - 8V	200MV - 8V
OPERATING VOLTAGE	10V DC - 16V DC	10V DC - 16V DC
RECOMMENDED FUSE RATING	400A	200A
TOPOLOGY	CLASS AB	CLASS AB

EDA COMPETITION BASS AMPLIFIER



- Ultra Class D Delivers Incredible Efficiency Of Up To 92%
- 3 X 0Aug Inputs Allow For Maximum Current Transfer To The Amplifier
- Amplifier Strapping Allows Two Identical Amplifiers To Deliver Their Combined Output Into A Single Channel
- Full EMI And CE Approval

SPECIFICATION

MODEL CONFIGURATION	EDA12000.1D-E6 COMPETITION MONOBLOCK
DIMENSIONS (H x W x D)	3" x 37.4" x 11.8" (76MM x 950MM x 299MM)
RMS @ 4Ω (14.4V 1% THD)	2650 WATTS
RMS @ 2Ω (14.4V 1% THD)	5200 WATTS
RMS @ 1Ω (14.4V 1% THD)	11,000 WATTS
RMS @ 1Ω (16V 1% THD)	12,000 WATTS
MAXIMUM POWER	24,000 WATTS
FREQUENCY RESPONSE	10HZ - 350HZ
CROSSOVER TYPE	LP / SUBSONIC
CROSSOVER RANGE	10HZ - 250HZ
INPUT SENSITIVITY	200MV - 8V
EFFICIENCY	92%
OPERATING VOLTAGE	9V DC - 16V DC
RECOMMENDED FUSE RATING	900A
TOPOLOGY	ULTRA CLASS D

EDGE

EDB12-E4 PASSIVE ENCLOSURE

EDBA-E2 ACTIVE ENCLOSURE RANGE



- ▶ 12" (323mm) Passive Bass Enclosure
- ▶ 4th Order Bass Reflex Configuration
- ▶ Rms Power 300 Watts
- ▶ Peak Power 900 Watts
- ▶ Minimum Input 150 Watts Rms
- ▶ Flared Port Reduces Turbulance

- ▶ Perfectly Matched Active Amplifiers
- ▶ High and Low Level Input
- ▶ Up To 1800 Watts Peak Power
- ▶ Up to 600 Watts Peak Power
- ▶ Built In Cable Management Solution
- ▶ Flared Port Reduces Turbulance

SPECIFICATION

MODEL	EDB12-E2
DRIVER	EDS12
POWER (WATTS)	300W RMS / 900W PEAK
IMPEDANCE	4Ω
DIMENSIONS (H X W X D)	365MM (14.4") X 445MM (17.5") X 425MM (16.7")
CONFIGURATION	4TH ORDER BASS REFLEX
RECOMMENDED AMPLIFIER	ED7300-E2

SPECIFICATION

MODEL	EDB10A-E2	EDB10TA-E4	EDB12A-E2	EDB12TA-E2
DRIVER	EDS10A	EDS10A	EDS12A	EDS12A X 2
POWER (WATTS)	250W RMS / 750W PEAK	500W RMS / 1500W PEAK	300W RMS / 900W PEAK	600W RMS / 1800W PEAK
IMPEDANCE	4Ω	4Ω	4Ω	4Ω
DIMENSIONS (H X W X D)	300MM (11.8") X 365MM (14.4") X 400MM (15.7")	300MM (11.8") X 765MM (30.1") X 400MM (15.7")	338MM (13.3") X 408MM (16.1") X 413MM (16.3")	338MM (13.3") X 740MM (29.1") X 413MM (16.3")
CONFIGURATION	4TH ORDER BASS REFLEX	4TH ORDER BASS REFLEX	4TH ORDER BASS REFLEX	4TH ORDER BASS REFLEX
AMPLIFIER	ED7200 (ACTIVE)	ED7300 (ACTIVE)	ED7200 (ACTIVE)	ED7300 (ACTIVE)

EDV12BA-E4 ACTIVE ENCLOSURE



- ▶ Perfectly Matched Active Amplifier
- ▶ High and Low Level input
- ▶ 900 Watts Peak Power
- ▶ 300 Watts RMS Power
- ▶ 4th Order Bass Reflex Configuration
- ▶ Slot Port Reduces Turbulance

SPECIFICATION

MODEL	EDV12BA-E4
DRIVER	EDS12
POWER (WATTS)	300W RMS / 900W PEAK
IMPEDANCE	4Ω
CONFIGURATION	4TH ORDER BASS REFLEX
PRODUCT DIMENSIONS (H x W x D)	376MM (14.8") x 415MM (16.3") x 376MM (14.8")
AMPLIFIER	ED7300 (ACTIVE)

EDV12A-E4 ACTIVE ENCLOSURE



- ▶ Perfectly Matched Active Amplifier
- ▶ High and Low Level input
- ▶ 900 Watts Peak Power
- ▶ 300 Watts RMS Power
- ▶ 4th Order Bass Reflex Configuration
- ▶ Flared Slot Port Reduces Turbulance

SPECIFICATION

MODEL	EDV12A-E4
DRIVER	EDS12
POWER (WATTS)	300W RMS / 900W PEAK
IMPEDANCE	4Ω
CONFIGURATION	4TH ORDER BASS REFLEX
PRODUCT DIMENSIONS (H x W x D)	371MM (14.6") x 633MM (24.9") x 430MM (16.9")
AMPLIFIER	ED7300 (ACTIVE)

EDGE


EDPRO45T-E6

EDPRO45TN-E6




- ▶ 6,5" (156mm) Pro Audio Compression Driver
- ▶ Ferro-Fluid Voice Coil Cooling
- ▶ Ferrite magnet
- ▶ Rms Power 80 Watts
- ▶ Peak Power 240 Watts
- ▶ Minimum Input 40 Watts Rms
- ▶ 35mm Voice Coil

FREQUENCY RESPONSE

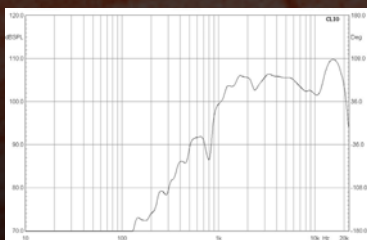

- ▶ 6,5" (156mm) Pro Audio Compression Driver
- ▶ Ferro-Fluid Voice Coil Cooling
- ▶ Neodymium magnet
- ▶ Rms Power 80 Watts
- ▶ Peak Power 240 Watts
- ▶ Minimum Input 40 Watts Rms
- ▶ 35mm Voice Coil

FREQUENCY RESPONSE

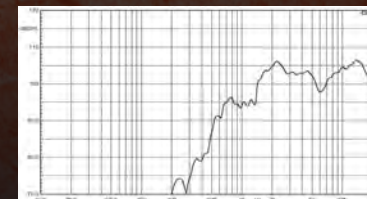


EDPRO37TA-E4

EDPRO38TA-E4




- ▶ 3.8" (98mm) Pro Audio Bullet Tweeter
- ▶ Aluminium Diaphragm
- ▶ Aluminium Front Housing
- ▶ Rms Power 75 Watts
- ▶ Peak Power 225 Watts
- ▶ Minimum Input 35 Watts Rms
- ▶ 25mm Voice Coil

FREQUENCY RESPONSE

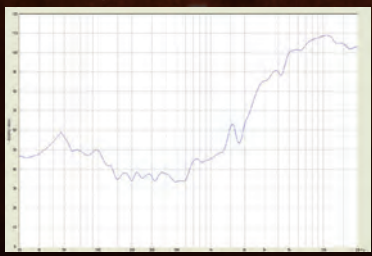

- ▶ 3.8" (98mm) Pro Audio Bullet Tweeter
- ▶ Titanium Diaphragm
- ▶ Aluminium Front Housing
- ▶ Rms Power 75 Watts
- ▶ Peak Power 225 Watts
- ▶ Minimum Input 35 Watts Rms
- ▶ 25mm Voice Coil

FREQUENCY RESPONSE

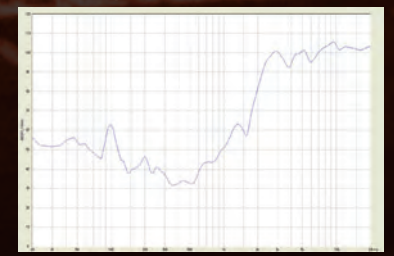

EDGE

EDPRO22T-E4



- ▶ 2.2" (58mm) Pro Audio Bullet Tweeter
- ▶ Titanium Diaphragm
- ▶ Aluminium Front Housing
- ▶ Rms Power 100 Watts
- ▶ Peak Power 300 Watts
- ▶ Minimum Input 50 Watts Rms
- ▶ 25mm Voice Coil

FREQUENCY RESPONSE




EDPRO4TX-E4



- ▶ 4" (104mm) Pro Audio Compression Driver
- ▶ Ferro-Fluid Voice Coil Cooling
- ▶ Aluminium Front Housing
- ▶ Rms Power 150 Watts
- ▶ Peak Power 450 Watts
- ▶ Minimum Input 75 Watts Rms
- ▶ 44mm Voice Coil

FREQUENCY RESPONSE

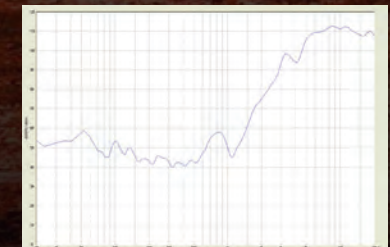

EDPRO23ST-E7




EDPRO31ST-E7




- 2.3" (56mm) pro audio compression driver
- Titanium diaphragm
- RMS power 100 watts
- Peak power 200 watts
- Mounting depth 36mm
- Sensitivity 106dB
- Frequency response 2kHz - 20kHz

FREQUENCY RESPONSE

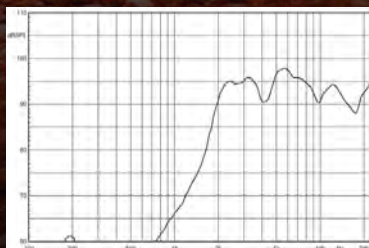

- 3.1" (80mm) pro audio bullet tweeter
- Aluminium diaphragm
- RMS power 80 watts
- Peak power 160 watts
- Mounting depth 44mm
- Sensitivity 106dB
- Frequency response 2kHz - 18kHz

FREQUENCY RESPONSE

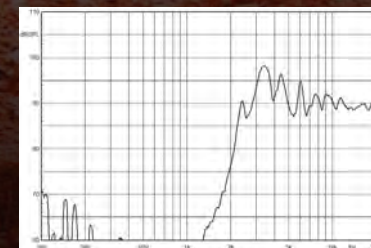


EDGE

EDPRO36BT-E7



- ▶ 3.7" (95mm) pro audio bullet tweeter
- ▶ Aluminium diaphragm
- ▶ RMS power 80 watts
- ▶ Peak power 160 watts
- ▶ Mounting depth 39mm
- ▶ Sensitivity 105dB
- ▶ Frequency response 2kHz - 20kHz

FREQUENCY RESPONSE

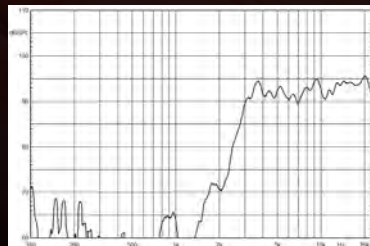

EDPRO65B-E6




- ▶ 6.5" (165mm) Pro Audio Midrange
- ▶ Composite Woofer Cone
- ▶ Dual Roll Cloth Surround
- ▶ Rms Power 150 Watts
- ▶ Peak Power 300 Watts
- ▶ Minimum Input 75 Watts Rms
- ▶ 25mm Voice Coil

TS PARAMETERS

Fms	125.0Hz	Nref	0.734%
Mmd	15.00 GR	BL	4.109 TM
Kxm	4.850 MH	SPL	90.7dB
Qms	5.917	Vas	4.846 L
Qes	1.246	Krm	5.844 OHMS
Qts	1.029	ERM	0.616
EXM	0.634		
CMS	0.19 MM/N		
Mms	8.373 GR		

FREQUENCY RESPONSE

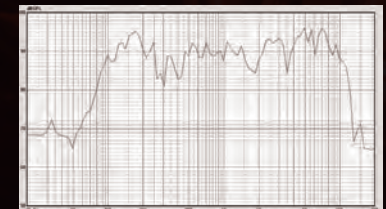

EDPR06B-E6




- ▶ 6.5" (165mm) Pro Audio Midrange
- ▶ Composite Woofer Cone
- ▶ Dual Roll Cloth Surround
- ▶ Rms Power 150 Watts
- ▶ Peak Power 300 Watts
- ▶ Minimum Input 75 Watts Rms
- ▶ 25mm Voice Coil

TS PARAMETERS

Fms	166.2Hz	Nref	1.092%
Mmd	15.00 Gr	Bl	4.410 Tm
Kxm	4.850 Mh	Spl	92.4dB
Qms	8.695	Vas	3.458 L
Qes	1.406	Krm	176.5 Ohms
Qts	1.210	Ern	0.631
Exm	0.631		
Cms	112.06 mm/N		
Mms	8.183 Gr		

FREQUENCY RESPONSE

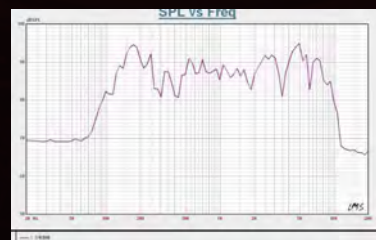

EDPR065C-E6




- ▶ 6.5" (165mm) Pro Audio Wideband Midrange
- ▶ Composite Woofer Cone
- ▶ Dual Roll Cloth Surround
- ▶ Rms Power 130 Watts
- ▶ Peak Power 260 Watts
- ▶ Minimum Input 65 Watts Rms
- ▶ 38mm Voice Coil

TS PARAMETERS

Fms	127.7Hz	Nref	1.07%
Res	10.2 Ohms	Bl	5.7 Tm
Re	3.2 Ohms	Spl	92.3dB
Qms	3.46	Vas	4.1 L
Qes	0.76	Rp	12.4 Ohms
Qts	0.62	Lp	5.9 Mh
Rms	3.2 KΩ/s	Cp	537.6 Uf
Cms	0.16 mm/N	Lc	0.00 Mh
Mms	9.7 Gr		

FREQUENCY RESPONSE

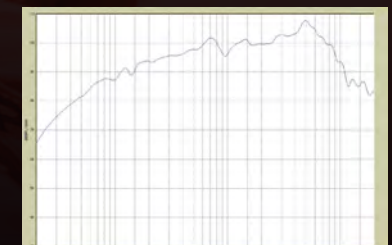

EDGE

EDPRO65L-E6




- ▶ 6.5" (165mm) Pro Audio Wideband Midrange
- ▶ Composite Woofer Cone
- ▶ Dual Roll Cloth Surround
- ▶ Rms Power 130 Watts
- ▶ Peak Power 260 Watts
- ▶ Minimum Input 65 Watts Rms
- ▶ 38mm Voice Coil

TS PARAMETERS

FMS	121.9Hz	NREF	1.39%
RES	11.4 OHMS	BL	6.1 Tm
RE	3.2 OHMS	SPL	93.4 DB
QMS	3.35	VAS	4.7 L
QES	0.59	RP	14.5 OHMS
QTS	0.50	LP	7.5 MH
RMS	2.0 Kg/s	CP	480.1 Uf
CMS	0.19 MM/N	LE	0.00 MH
MMS	8.9 GR		

FREQUENCY RESPONSE

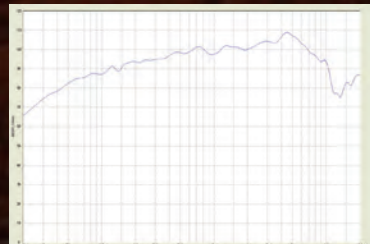

EDPRO65FW-E6




- ▶ 6.5" (165mm) Pro Audio Full Range Speaker
- ▶ Composite Woofer Cone
- ▶ Cast Aluminium Basket
- ▶ Rms Power 150 Watts
- ▶ Peak Power 300 Watts
- ▶ Minimum Input 75 Watts Rms
- ▶ 38mm Voice Coil

TS PARAMETERS

FMS	96.5Hz	NREF	1.36%
RES	9.0 OHMS	BL	5.4 Tm
RE	3.2 OHMS	SPL	93.3 DB
QMS	7.7	VAS	8.1 L
QES	0.52	RP	29.2 OHMS
QTS	0.49	LP	10.8 MH
RMS	0.7 Kg/s	CP	444.3 Uf
CMS	0.35 MM/N	LE	0.20 MH
MMS	7.7 GR		

FREQUENCY RESPONSE

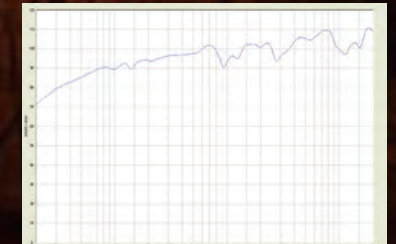

EDPR065VA-E6




- ▶ 6,5" (165mm) Pro Audio Vocal Midrange
- ▶ Composite Woofer Cone
- ▶ Dual Roll Cloth Surround
- ▶ Rms Power 130 Watts
- ▶ Peak Power 260 Watts
- ▶ Minimum Input 65 Watts Rms
- ▶ 38mm Voice Coil

TS PARAMETERS

Fms	164.8Hz	Nref	0.97%
Res	9.0 OHMS	BL	5.4 Tm
RE	3.2 OHMS	SPL	91.9 DB
QMS	11.47	Vas	2.4 L
QES	1.09	Rp	27.1 OHMS
QTS	0.99	Lp	2.9 Mh
RMS	0.9 Kg/s	Cp	528.5 Uf
CMS	0.10 MM/N	LE	0.21 Mh
MMS	9.4 GR		

FREQUENCY RESPONSE

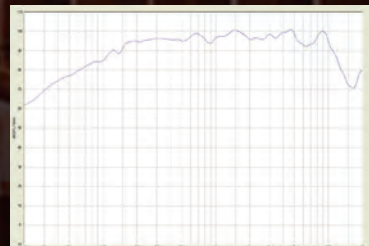

EDPR065X-E6



- ▶ 6,5" (165mm) Pro Audio Midrange
- ▶ Composite Woofer Cone
- ▶ Dual Roll Cloth Surround
- ▶ Rms Power 150 Watts
- ▶ Peak Power 300 Watts
- ▶ Minimum Input 75 Watts Rms
- ▶ 38mm Voice Coil

TS PARAMETERS

Fms	147.5Hz	Nref	1.02%
Res	11.9 OHMS	BL	6.2 Tm
RE	3.2 OHMS	SPL	92.1DB
QMS	7.36	Vas	2.6 L
QES	0.79	Rp	23.7 OHMS
QTS	0.71	Lp	4.5 Mh
RMS	1.3 Kg/s	Cp	415.1 Uf
CMS	0.12 MM/N	LE	0.22 Mh
MMS	10.1 GR		

FREQUENCY RESPONSE



EDGE

EDPR065XL-E6



- ▶ 6.5" (165mm) Pro Audio Midrange
- ▶ Composite Woofer Cone
- ▶ Dual Roll Cloth Surround
- ▶ Rms Power 100 Watts
- ▶ Peak Power 260 Watts
- ▶ Minimum Input 50 Watts Rms
- ▶ 25mm Voice Coil

TS PARAMETERS

FMS	128.9Hz	NREF	1.234%
MMD	15.00 GR	BL	4.224 Tm
KXM	4.755 MH	SPL	92.9dB
QMS	5.775	VAS	5.406 L
QES	1.136	KRM	316.5 UOHMS
QTS	0.949	ERM	0.869
EXM	0.636		
CMS	175.2 UMM/N		
MMS	7.490 GR		

FREQUENCY RESPONSE



EDPR065SX-E6




- ▶ 6.5" (165mm) Pro Audio Midrange
- ▶ Composite Woofer Cone
- ▶ Dual Roll Cloth Surround
- ▶ Rms Power 100 Watts
- ▶ Peak Power 260 Watts
- ▶ Minimum Input 50 Watts Rms
- ▶ 25mm Voice Coil

TS PARAMETERS

FMS	170.2Hz	NREF	1.145%
MMD	15.00 GR	BL	4.201 Tm
KXM	5.804 MH	SPL	92.6dB
QMS	6.586	VAS	3.546 L
QES	1.467	KRM	628.0 UOHMS
QTS	1.206	ERM	0.829A
EXM	0.639		
CMS	114.9 UMM/N		
MMS	8.373 GR		

FREQUENCY RESPONSE

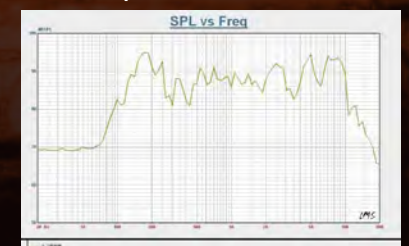

EDPRO8X-E6




- 8" (200mm) Pro Audio Midrange
- Composite Woofer Cone
- Dual Roll Cloth Surround
- Rms Power 150 Watts
- Peak Power 300 Watts
- Minimum Input 75 Watts Rms
- 38mm Voice Coil

TS PARAMETERS

FMS	101.3HZ	NREF	1.47%
RES	24.5 OHMS	BL	8.8 TM
RE	3.2 OHMS	SPL	93.7dB
QMS	8.62	VAS	7.8 L
QES	0.53	RP	42.1 OHMS
QTS	0.5	LP	9.8 MH
RMS	1.5 KG/S	CP	364.0 UF
CMS	0.12 MM/N	LE	0.32 MH
MMS	20.4 GR		

FREQUENCY RESPONSE

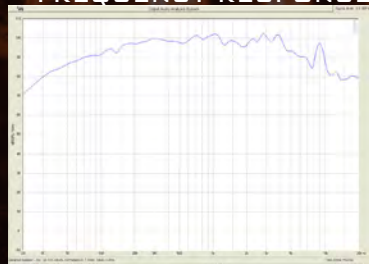

EDPRO8SX-E6




- 8" (200mm) Pro Audio Midrange
- Composite Woofer Cone
- Dual Roll Cloth Surround
- Rms Power 150 Watts
- Peak Power 300 Watts
- Minimum Input 75 Watts Rms
- 25mm Voice Coil


TS PARAMETERS

FMS	123.6HZ	NREF	1.133%
MMD	20.00 GR	BL	5.531 TM
KXM	6.250 MH	SPL	92.6dB
QMS	7.353	VAS	8.289 L
QES	1.335	KRM	1.112 UOHMS
QTS	1.130	ERM	0.800A
EXM	0.660		
CMS	100.8 UMM/N		
MMS	16.437 GR		


FREQUENCY RESPONSE

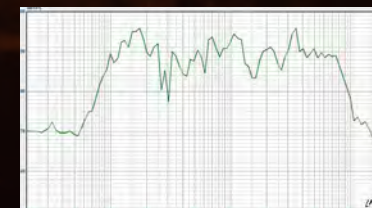



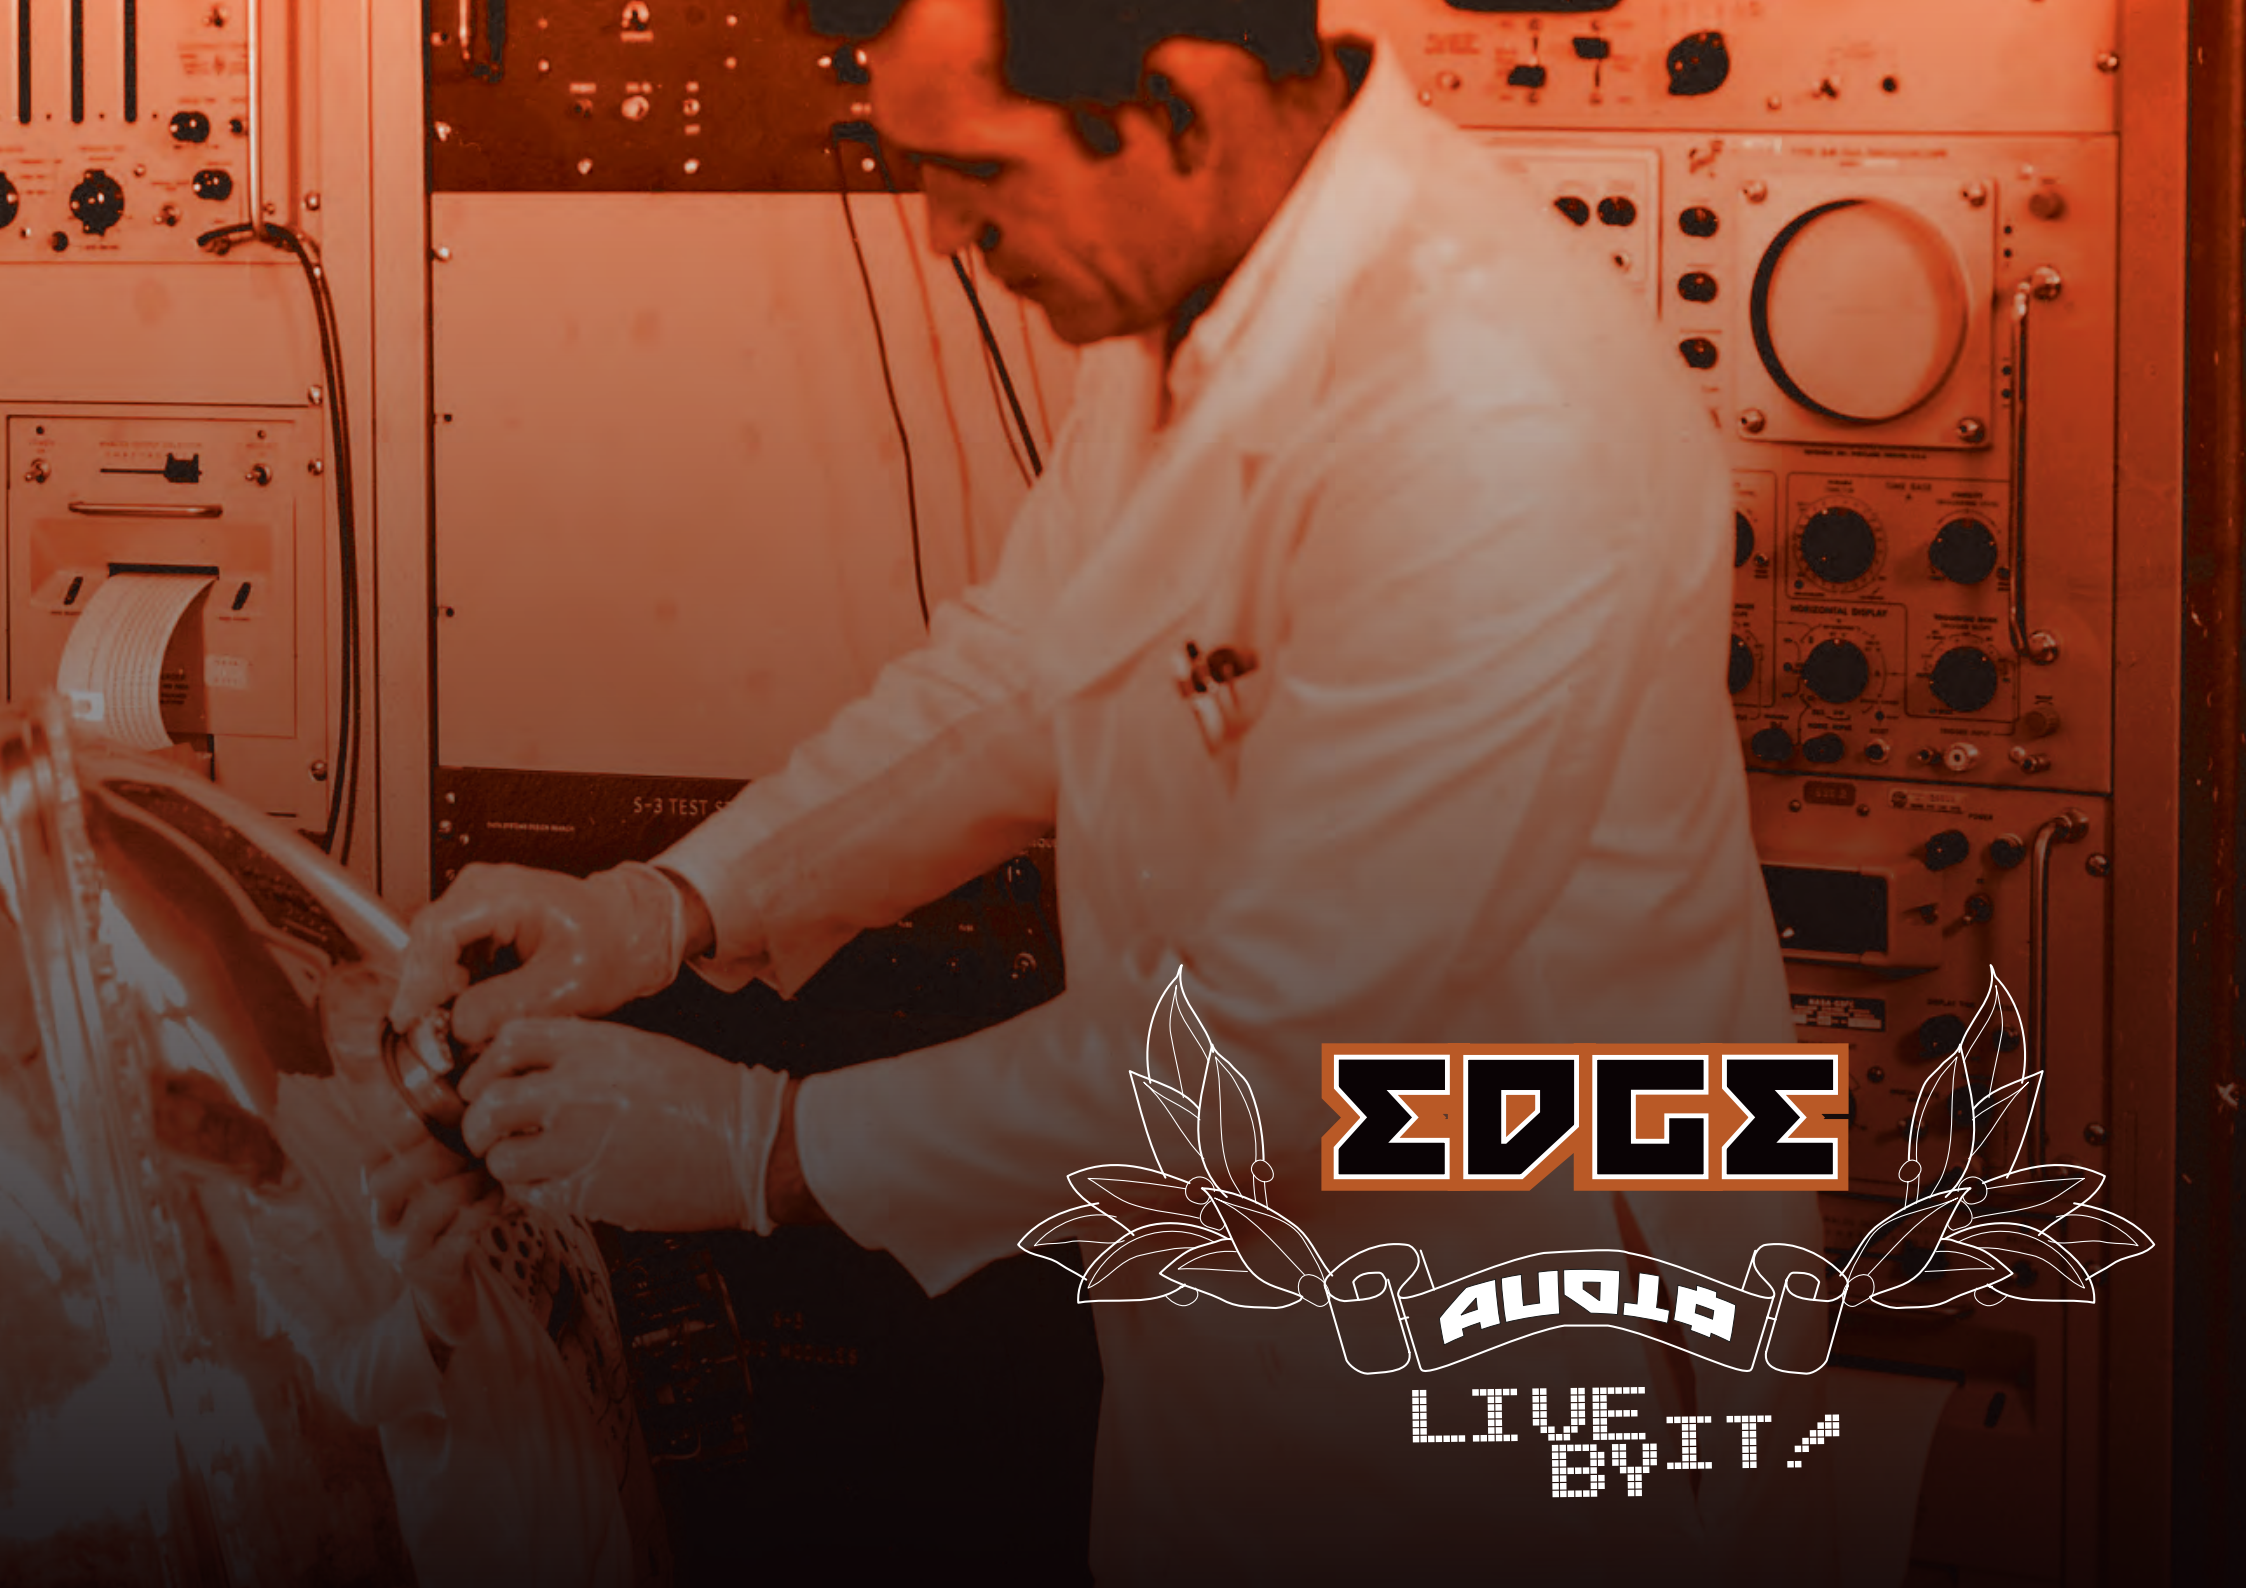

EDGE

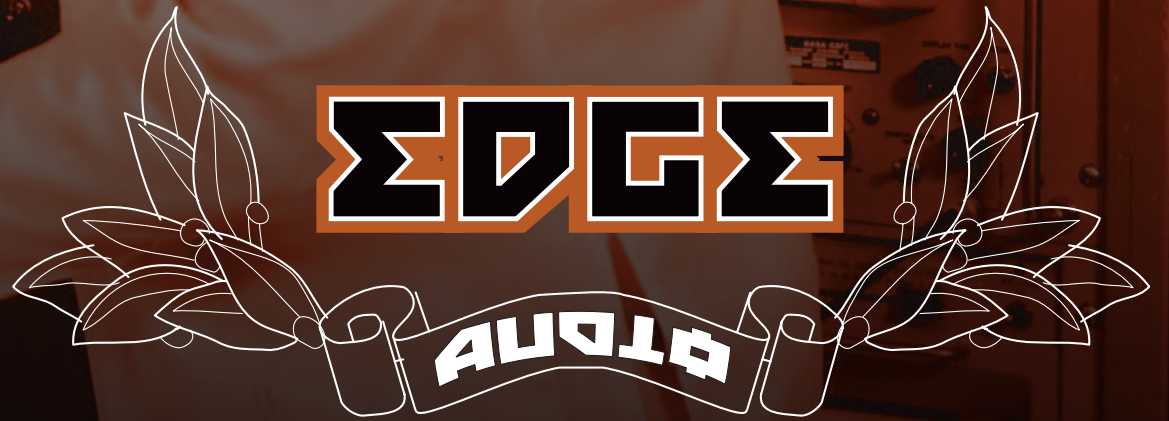

AUDIO

**LIVE
BYIT**

EDGE

AUDIO

LIVE
BY IT

93

92

91

790

WWW.EDGECARAUDIO.COM

