

EDGE

REVOLUTIONARY
CAR AUDIO

CAR AUDIO 2021





PRODUCT RANGES

EDGE Car audio was born from a desire to create cutting edge high performance car audio for the enjoyment of the many, not just the few. All EDGE products are built to deliver performance and value surpassed by no other brand.

Utilising our experienced team of UK engineers and designers, we define and interpret the market needs of modern car audio consumers. The range is constantly evolving with new product ideas introduced directly from customer feedback and demand. Be part of the revolution and join us at the cutting EDGE of car audio.

We are here for a good time not for a long time... Live it on the **EDGE**



DB SERIES



LEVEL 1

The EDGE DB Series was designed to offer the best bang for buck products on the market.

With subwoofers, Coaxial speakers, Pro audio speakers and amplifiers, the DB series provides everything you need to be the loudest on the streets.

DBX SERIES



LEVEL 2

When the DB series from EDGE just doesn't feed your need for extreme audio, the DBX series pushes the boundaries of the best value range on the market!

The DBX series offers an extreme take on our DB series, this is high powered subwoofers, super loud Pro audio speakers, tweeters and a brilliant range of amplifiers to power them all.

When you want to push your budget go DBX.

STREET SERIES



LEVEL 3

The Street series is where it all began!

In 2007 we began setting the streets on fire with the EDGE brand and the current incarnation of the Street series is stronger than ever.

In this range we start to push the boundaries of car audio with high levels of Pro audio, trunk rattling subwoofer alongside component and coaxial speakers to suit all needs.

XTREME SERIES



LEVEL 4

Want to be the loudest on the street?

Want to push the limits?

The Xtreme series combines some of the most powerful subwoofers, amplifiers and speakers into one range! With brand new subwoofers and amplifiers we're truly living up to our premise of producing revolutionary car audio.

Want to be seen and heard?

Choose EDGE Extreme.

UNLIMITED SERIES



LEVEL 5

When only the best will do EDGE Unlimited is the only range for you. our most uncompromising range comprising of all the latest technology and design.

We are able to offer the biggest, strongest, loudest and most powerful products we have ever produced.

This range is not for the faint of heart and is used in competition winning installs around the world! When you want to be a winner choose EDGE Unlimited.

DB SERIES

DB SERIES WIDEBAND SPEAKERS

Here we have our Victory range of wideband dual cone speakers in our entry level EDGE DB Series.

These speakers are of a dual cone construction, made from precision engineered soft-parts and a perfectly balanced motor design. This product gives a full range frequency response for a great single point source speaker.

What is a single point source speaker? Quite simply a speaker which delivers all its sound from a single location.

With the sound originating from a single location means there is no disparity in the location of the sound due to multiple speaker locations and the music sounds just as the artist intended.

Often a simple application requires a simple solution, the DB series Wideband speakers offer a full range, high efficiency speaker which delivers full range audio reproduction at any power input for that one stop easy and fluid installation.



Victory



EDGE
DB
SERIES

EDGE

DB SERIES



FEATURES

- 2 WAY FULL RANGE WIDEBAND SPEAKERS
- RUBBER SURROUND
- COMPOSITE WOOFER CONE
- LIGHTWEIGHT FOAM SURROUND
- MULTI-FIT DESIGN ALLOWS FITMENT IN MOST VEHICLES
- SPADE TERMINAL



NEW

NEW

NEW

NEW



Model	EDB5W-E0	EDB6W-E0	EDB8W-E0	EDB69W-E0
Type	Full Range Speaker	Full Range Speaker	Full Range Speaker	Full Range Speaker
Configuration	2-way	2-way	2-way	2-way
Speaker Size	5.25" (130mm)	6.5" (165mm)	8" (200mm)	6x9" (160 x 220mm)
RMS Power	70 watts	100 watts	110 watts	110 watts
Peak Power	140 watts	200 watts	220 watts	220 watts
Frequency Response	80Hz - 15.5kHz	70Hz - 15.5kHz	70Hz - 11kHz	70Hz - 13kHz
Impedance	4 Ohms	4 Ohms	4 Ohms	4 Ohms
Sensitivity	92dB	94dB	94dB	94dB
Mounting Depth	1.7" (43mm)	2.2" (57mm)	3" (75mm)	3.1" (78mm)
Mounting Diameter	4.6" (117mm)	5.6" (141mm)	7.3" (186mm)	5.7" (145mm) x 8.5" (215mm)
Recommended Amplifier	EDB75.4-E9	EDB75.4-E9	EDB75.4-E9	EDB75.4-E9

DB SERIES

DB SERIES COMPONENT TWEETER

The all-new EDGE DB Series tweeter provides the perfect tune up solution for your factory audio system that lacks high frequency output.

The DB Series tweeter features a black Mylar dome diaphragm which delivers enhanced high frequencies and vocal reproduction and has a large Hexagon mesh grille for protection.

Installation is made simple with the option to flush mount or surface mount the tweeter and the wiring has a filter capacitor inline so there is no need to find space for an external crossover housing.

When enhanced sound is required as an upgrade to your system, an EDGE tweeter is the perfect place to start.

MYLAR
TWEETER

NEO MAG

HEX



EDGE DB SERIES



FEATURES

- COMPONENT TWEETER
- NEODYMIUM MOTOR
- BLACK MYLAR DOME DIAPHRAGM
- 20MM VOICE COIL
- FLUSH AND SURFACE MOUNTING OPTIONS
- INLINE PASSIVE CROSSOVER FILTER



Model	EDB1TN-E1
Type	Tweeter
Configuration	1-way
Speaker Size	1.8" (46mm)
RMS Power	25 watts
Peak Power	50 watts
Frequency Response	2Hz - 20kHz
Impedance	4 Ohms
Mounting Depth	0.7" (17mm)
Mounting Diameter	1.5" (39mm)
Recommended Amplifier	EDB75.4-E9

DB SERIES

DB SERIES COAXIAL SPEAKERS

EDGE first range of Coaxial speakers are here exhibited in the DB series available in 5 and 6 inch variants

The DB Series coaxial speakers features a rigid IMPP woofer cone which helps to deliver robust and accurate midrange and bass response paired with a centrally mounted 20mm tweeter with Neodymium motor to give enhanced high frequencies and vocal reproduction.

All the soft parts are mounted on a solid pressed steel basket with enhanced ventilation, with the six inch featuring multi fit installation application.

When enhanced sound is required as an upgrade to your system, an EDGE coaxial is the product to pick. A coaxial will deliver full range sound from a single speaker and the composition of the DB series delivers impactful and dynamic sound.



EDGE DB SERIES



FEATURES

- 2 WAY COAXIAL SPEAKERS
- RUBBER SURROUND
- 1MPP WOOFER CONE
- NEODYMIUM TWEETER MOTOR
- MULTI-FIT DESIGN ALLOWS FITMENT IN MOST VEHICLES
- SPADE TERMINAL



Model	EDB5-E1	EDB6-E1
Type	Coaxial	Coaxial
Configuration	2-way	2-way
Speaker Size	5.25" (130mm)	6.5" (165mm)
RMS Power	50 watts	60 watts
Peak Power	100 watts	120 watts
Frequency Response	80Hz - 20kHz	65Hz - 20kHz
Impedance	4 Ohms	4 Ohms
Mounting Depth	2" (50mm)	2.1" (53mm)
Mounting Diameter	4.6" (117mm)	5.6" (141mm)
Grille	No	No
Recommended Amplifier	EDB75.4-E9	EDB75.4-E9

DB SERIES

DB SERIES POWER AMPLIFIERS

Introducing the DB series amplifiers.

A range of entry level amps to be paired to power the range of speakers and subwoofers featured in the DB series.

Our DB Series amps feature Class D topology, this means they more efficiently produce power and can be manufactured in a compact design for easier installation.

Available in single channel and four channel models the amp range features active crossovers, bass boosts and remote gain controls for accurate amp configuration.

When power and space are important, utilise the DB series amps to power any DB series speaker, subwoofer and tweeter.

Class
D

Low
Pass
FILTER

High
Pass
FILTER

BASS
ENHANCE



EDGE
DB
SERIES



FEATURES

- 4 CHANNEL AND MONOBLOCK POWER AMPLIFIERS
- BUILT IN ACTIVE CROSSOVERS
- BASS BOOST CIRCUIT
- EXTRUDED ALUMINIUM HEATSINK
- EFFICIENT CLASS D TOPOLOGY



Model	EDB500.1-E9	EDB1000.1-E9	EDB75.4-E9	EDB80.2LITE-E0	EDB80.4LITE-E0
Configuration	Monoblock	Monoblock	4 Channel	2 Channel	4 Channel
Dimensions (H x W x D)	46mm (1.8") x 185mm (7.3") x 205mm (8.1")	46mm (1.8") x 275mm (10.8") x 205mm (8.1")	46mm (1.8") x 165mm (6.5") x 205mm (8.1")	58mm (2.3") x 178mm (7") x 230mm (9.1")	58mm (2.3") x 178mm (7") x 323mm (12.7")
RMS @ 4 Ohms	1 x 200w	1 x 400w	4 x 50w / 2 x 150w	2 x 60w / 1 x 160w	4 x 60w / 2 x 160w
RMS @ 2 Ohms	1 x 350w	1 x 650w	2 x 75w	2 x 80w	4 x 80w
RMS @ 1 Ohms	1 x 500w	1 x 1000w	N/A	N/A	N/A
Maximum Power	1000w	2000w	600w	320w	640 w
Frequency Response	15Hz - 250Hz	15Hz - 250Hz	15Hz - 20kHz	20Hz - 20kHz	20Hz - 20kHz
Crossover Type	LP / Subsonic	LP / Subsonic	HP/LP/FLAT	HP/LP/FLAT	HP/LP/FLAT
Crossover Range	15hz - 250Hz	15hz - 250Hz	15Hz - 8kHz	50Hz - 4kHz	50Hz - 4kHz
Topology	Class D	Class D	Class D	Class AB	Class AB

DB SERIES


DB SERIES PRO AUDIO TWEETER

The first introduction into Pro audio tweeters is in the DB series where we feature 2 Bullet tweeters, high frequencies at high volume.

The DB series Pro speakers are Ferrite magnet based drivers with Aluminium diaphragms for high volume, high frequency sound. The Horn designs allow a wide sound dispersion and a high level of efficiency meaning the speaker will be loud even at its minimum power input.

Its cast Aluminium housing ensures a robust solid functional design with no added resonance to distort the sound and a high quality feel.

Our DB series bullet tweeters have been engineered to match our range of Pro audio speakers, so when paired together you get a full range, high volume Pro audio sound.

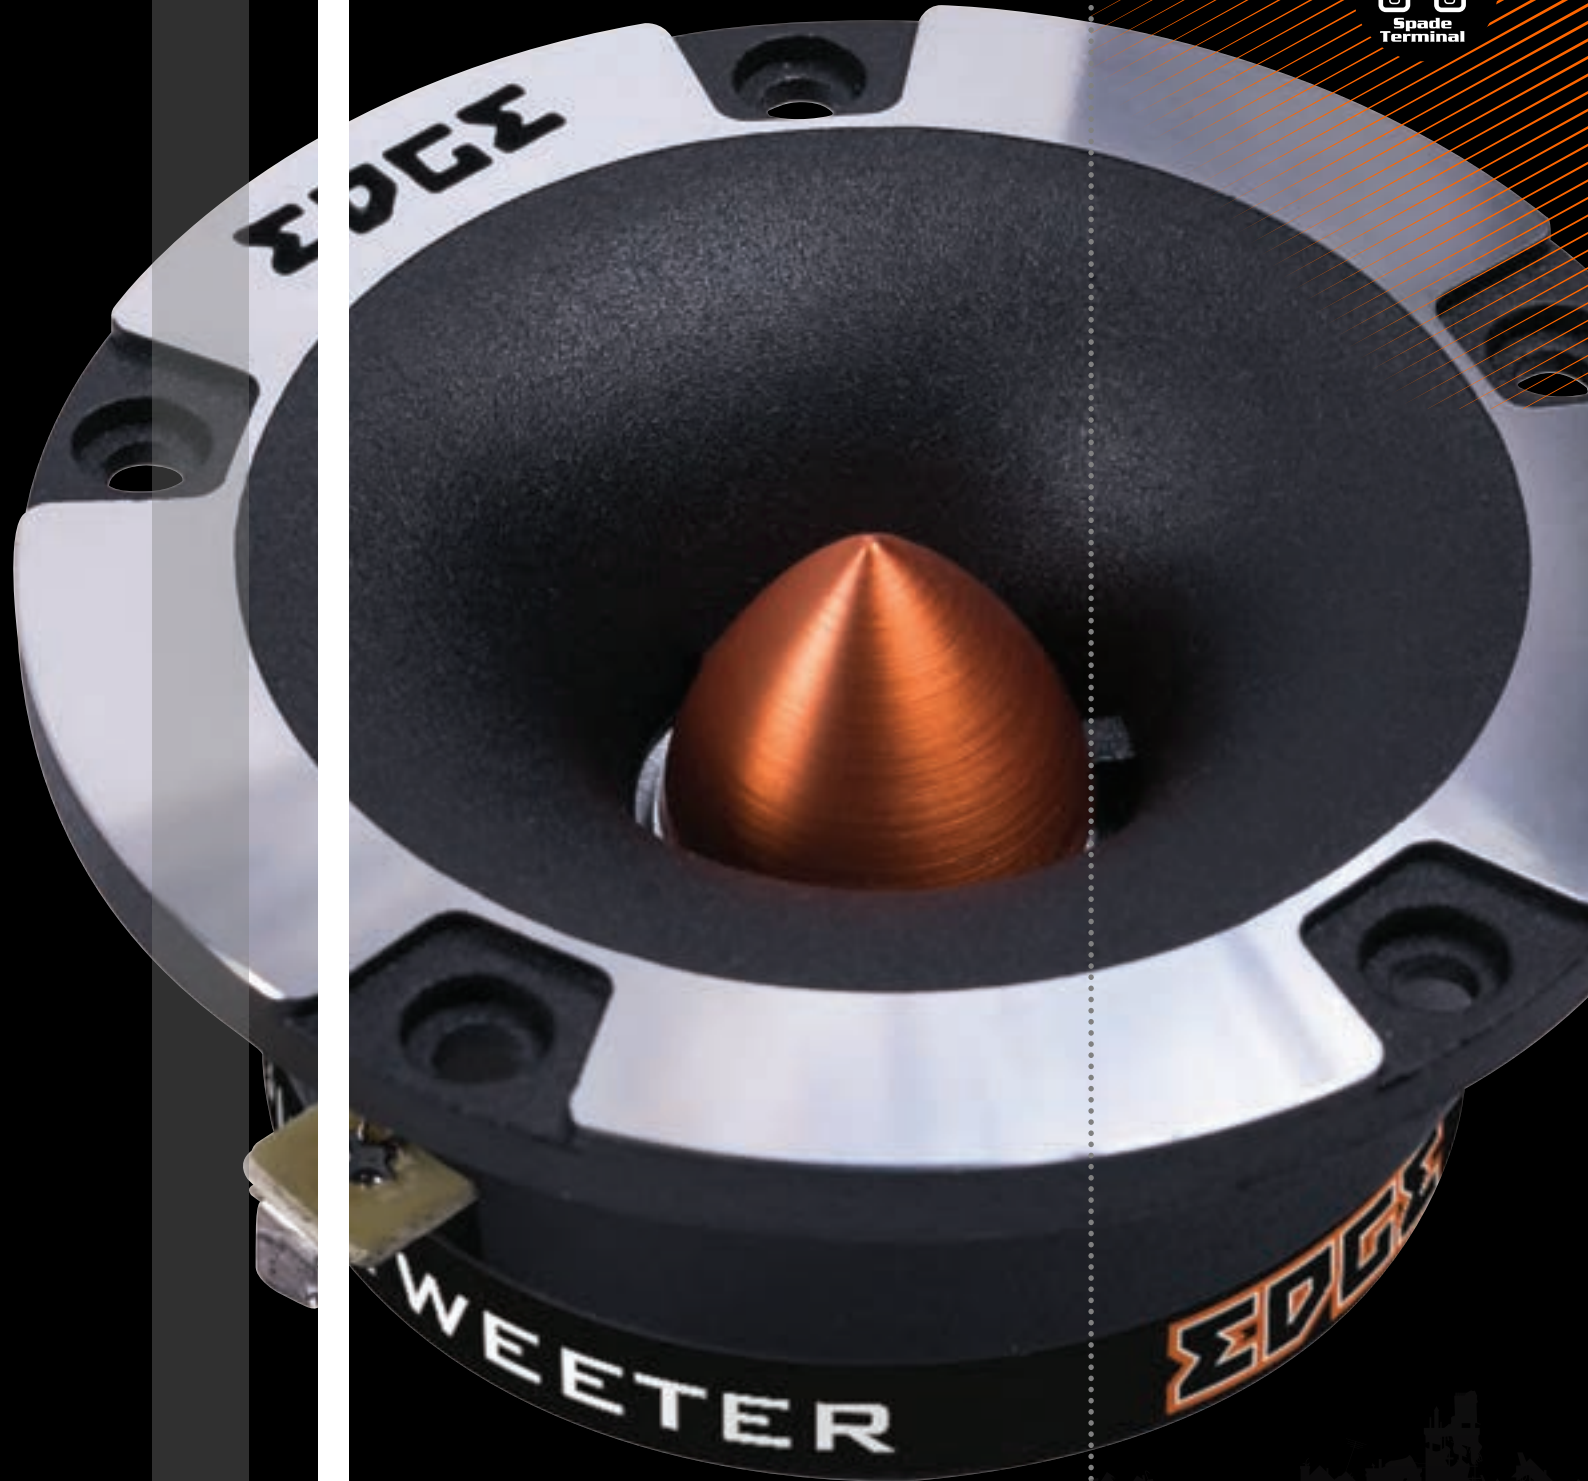

EDGE

DB

SERIES

EDGE
EDBPRO37T

DB
SERIES

150 WATTS PEAK
75 WATTS RMS



FEATURES

- 3.7" PRO AUDIO BULLET TWEETER
- ALUMINIUM DIAPHRAGM
- CAST ALUMINIUM FLANGE
- SPADE TERMINAL
- HIGH SENSITIVITY



NEW



Model	EDBPRO36T-E1	EDBPRO37T-E0
Type	Pro audio Tweeter	Pro audio Tweeter
Configuration	1-way	1-way
Speaker Size	3.8" (98mm)	3.7" (95mm)
RMS Power	80 watts	75 watts
Peak Power	160 watts	150 watts
Frequency Response	2kHz - 20kHz	2kHz - 20kHz
Sensitivity	103dB	102dB
Impedance	4 Ohms	4 Ohms
Mounting Depth	1.5" (39mm)	1.1" (28mm)
Mounting Diameter	3.1" (80mm)	2.9" (73mm)
Recommended Amplifier	EDB75.4-E9	EDB75.4-E9

DB SERIES

DB SERIES PRO AUDIO MIDRANGE

Our DB series features our first level of Pro audio speakers, some of the biggest and best selling in the world.

A DB series Pro audio speakers are our entry level into producing high volume midrange output across a variety of speaker sizes. To produce the high volume levels expected from Pro audio our EDGE DB Series feature highly engineered components which have been specially designed

For extremely high efficiency and wide frequency response, this includes special cone materials, precision engineered voice coils and motors and custom tooled dust-caps. This results in a loud and market beating pro speaker.



DB SERIES

DB SERIES SUBWOOFERS

The EDGE DB series features three subwoofers to cover a range of power and size applications.

The subwoofers in the DB Series harmonises hand-picked moving parts with structurally engineered magnet structure to create a balanced set of subwoofers which deliver precise bass reproduction as well as great levels of SPL output. Within the range we feature DB and DB Lite subwoofers with varying power abilities.

All woofers have undergone the same engineering practices and principles to produce an excellent entry level range of subwoofers.

Why add a subwoofer? In order to fully feel and experience the music, bringing the low bass that makes you feel the sound and feel fully immersed!



EDGE

DB SERIES



FEATURES

- NON PRESSED PAPER CONE
- WIDE ROLL FOAM SURROUND
- DUAL POLY COTTON SPIDERS
- SPRING LOADED CONNECTORS
- Y35 FERRITE MAGNET
- DUAL 2 OHM IMPEDANCE
- DOUBLE STITCHED SURROUND




NEW

NEW

NEW

NEW



Model	EDB12D2LITE-E0	EDB10D2-E0	EDB12D2-E0	EDB15D2-E0
Speaker Size	12" (323mm)	10" (274mm)	12" (323mm)	15" (392mm)
Peak/RMS Power	300W/600W	500W/1000W	600W/1200W	750W/1500W
Sensitivity	87dB	84dB	88dB	86dB
Frequency Response	25Hz - 850Hz	30Hz - 1kHz	25Hz - 850Hz	20Hz - 450Hz
Impedance	Dual 2Ω	Dual 2Ω	Dual 2Ω	Dual 2Ω
Voice Coil	2" 4 layer	2" 4 layer	2" 4 layer	2" 4 layer
Magnet weight	40oz	55oz	55oz	75oz
Magnet dimensions	5.3" (137mm) x 0.8" (20mm)	5.7" (145mm) x 1" (25mm)	5.7" (145mm) x 1" (25mm)	6.1" (156mm) x 1.2" (30mm)
Mounting Depth	5.5" (140mm)	5.3" (135mm)	5.8" (146mm)	7.4" (189mm)
Mounting Diameter	11.1" (283mm)	9.2" (232mm)	10.8" (275mm)	13.7" (347mm)
Recommended Amplifier	EDB500.1-E9	EDB500.1-E9	EDB500.1-E9	EDB1000.1-E9

DB SERIES

DB SERIES PRO AUDIO ENCLOSURE

Unique from EDGE Audio the DB series Pro box, a full range Pro audio solution featuring 4 Pro Midrange drivers and 2 Pro bullet tweeters.

The DB Series Pro box was developed from a special requirement in Scandinavia, this design principle then became so popular we released it to the world. The Pro box is designed with a left and a right hand side, both ported and housing terminals for stereo sound. The port is calculated to help deliver higher mid-bass response and the

Quad 6.5 inch midrange and dual tweeters offer massive sound output from a small enclosure, perfect for anytime you want to be loud!. A solid MDF constructed enclosure with central bracing allows low resonance and keeps the playback clean and crystal clear.

Adding a Pro box is not for the feint of heart! When you want super loud crystal clear sound in or out of the vehicle this box delivers.



EDGE DB SERIES



- FULL RANGE PRO AUDIO ENCLOSURE
- 4 X EDBPRO6 MIDRANGE SPEAKERS
- 2 X EDPRO36BT TWEETERS
- DUAL PORTED ENCLOSURE
- DUAL INPUT WITH 2 X 2 OHM TERMINALS
- 1520 WATTS MAX POWER

Model	EDBPROBOX-E9
Tweeter	EDPRO36BT
Midrange	EDBPRO6
Midwoofer	N/A
Power (watts)	760W RMS / 1520W Peak
Impedance	Dual 2 Ohms
Dimensions (H x W x D)	160mm (6.3") x 900mm (35.4") x 248mm (9.8")
Frequency response	150Hz - 20kHz
Recommended Amplifier	EDA350.2

DB

SERIES



Bass Reflex



Active Enclosure



turbo port



High Level Input


DB SERIES ACTIVE BASS ENCLOSURES

The EDGE DB Series features our Entry level 12CA enclosure along side a new revision to the world renown EDB Series of boxes with a new "Stealth" Design

Our boxes all feature Turbo and Flared ports for smooth airflow which gives louder and more crisp bass, this paired with solid enclosure construction is a winning solution. The EDB series features a Dark design with hint of the signature EDGE orange and a new lower bass response with some

Component changes and alternations to the built in amplifier, this gives more depth and rumble!

When wanting to add that missing bass, the EDGE DB Series enclosures give an all in one solution packing a punch and delivered crisp, sharp and deep bass.



EXTENDED
FREQUENCY
RESPONSE

EDGE DB SERIES



- ALL NEW ACTIVE AMPLIFIER DELIVERS DEEPER BASS
- LOW AND HIGH LEVEL INPUT
- UP TO 1800 WATTS PEAK POWER
- UP TO 600 WATTS RMS POWER
- FLARED TURBOPORT REDUCES TURBULENCE



Model	EDB12CA-E0	EDB10A-E0	EDB12A-E0	EDB12TA-E0
Driver	ED512A	ED510A	ED512A	ED512A x 2
Power (watts)	300W RMS / 900W Peak	250W RMS / 750W Peak	300W RMS / 900W Peak	600W RMS / 1800W Peak
Impedance	4 Ohms	4 Ohms	4 Ohms	4 Ohms
Dimensions (H x W x D)	357mm (14.1") x 400mm (15.7") x 415mm (16.3")	300mm (11.8") x 365mm (14.4") x 400mm (15.7")	338mm (13.3") x 408mm (16.1") x 413mm (16.3")	338mm (13.3") x 740mm (29.1") x 413mm (16.3")
Configuration	4th order bass reflex	4th order bass reflex	4th order bass reflex	4th order bass reflex
Amplifier	ED7200 (Active)	ED7200 (Active)	ED7200 (Active)	ED7300 (Active)

DBX SERIES

DBX SERIES COMPONENT TWEETER

The all-new EDGE DBX Series tweeter provides the perfect tune up solution for your factory audio system that lacks high frequency output.

The DBX Series tweeter features a black Mylar dome diaphragm which delivers enhanced high frequencies and vocal reproduction.

Installation is made simple with the option to flush mount or surface mount the tweeter and the wiring has a filter capacitor inline so there is no need to find space for an external crossover housing.

When enhanced sound is required as an upgrade to your system, an EDGE tweeter is the perfect place to start.



EDGE

DBX

SERIES



FEATURES

- COMPONENT TWEETER
- NEODYMIUM MOTOR
- BLACK MYLAR DOME DIAPHRAGM
- 25MM VOICE COIL
- FLUSH AND SURFACE MOUNTING OPTIONS
- INLINE PASSIVE CROSSOVER FILTER

Model	EDBX1TN-E1
Type	Tweeter
Configuration	1-way
Speaker Size	1.8" (46mm)
RMS Power	25 watts
Peak Power	50 watts
Frequency Response	2Hz - 20kHz
Impedance	4 Ohms
Mounting Depth	0.7" (17mm)
Mounting Diameter	1.5" (39mm)
Recommended Amplifier	EDB75.4-E9

DBX SERIES

DBX SERIES COAXIAL SPEAKERS

Our DBX series see the introduction of our 3 way Coaxial speakers available in 5, 6.5 and 6x9" models

Coaxial in the DB series consist of a 3 way configuration. The Cone is a unique composite cone making it lightweight and strong allowing it to move fast to easily and accurately recreate the sound, paired with PEI tweeter material which gives sound quality similar to silk and volume close to metal but without the harshness.

The Stamped steel basket features a multi-fit design in the 6.5" which allows them to be easily installed in most vehicles.

Adding a DBX series coaxial will give you enhanced sound quality and volume due to its advanced materials and engineering, giving you a fantastic sound upgrade.



EDGE

DBX SERIES



- 3 WAY COAXIAL SPEAKERS
- PEI TWEETER ELEMENT
- COMPOSITE WOOFER CONE
- SPADE TERMINAL
- MULTI-FIT DESIGN ALLOWS FITMENT IN MOST VEHICLES



	Model	EDBX4-E1	EDBX5-E1	EDBX6-E1	EDBX69-E1
Type	Coaxial	Coaxial	Coaxial	Coaxial	Coaxial
Configuration	3-way	3-way	3-way	3-way	3-way
Speaker Size	4" (100mm)	5.25" (130mm)	6.5" (165mm)	6x9" (150 x 220mm)	
RMS Power	60 watts	75 watts	90 watts	150 watts	
Peak Power	120 watts	150 watts	180 watts	300 watts	
Frequency Response	100Hz - 20kHz	80Hz - 20kHz	65Hz - 20kHz	45Hz - 20kHz	
Impedance	4 Ohms	4 Ohms	4 Ohms	4 Ohms	
Mounting Depth	1.6" (43mm)	2" (50mm)	2.1" (53mm)	3.1" (79mm)	
Mounting Diameter	3.7" (94mm)	4.6" (117mm)	5.6" (141mm)	5.7" (145mm) x 8.5" (215mm)	
Grille	Yes	Yes	Yes	Yes	
Recommended Amplifier	EDA100.4-E7	EDA100.4-E7	EDA100.4-E7	EDA100.4-E7	

DBX SERIES

DBX SERIES POWER AMPLIFIERS

EDGE Introduces "The Big E" range of brand new Class D monoblock amplifiers to the DBX series.

These amps provide robust performance with 1Ω loading capable of delivering 1800 and 2200 watts RMS, this is ideal for high power and multiple subwoofer installations.

Our unique designed "Big E" heatsink has a high quality extruded aluminium chassis with thick side fins for heat dissipation and our signature E engraved into the top for a subtle but very unique design.

The amps come with solid die-cast 4awg power and ground terminals, dual speaker terminals and a bass remote for fine tuning adjustability, paired with onboard adjustment for gain, bass boost, frequency and a subsonic filters these amps offer great levels of control.

Finally both models offer a signal output allowing you to simply add signal to another amp in your system

Elegant, precise and powerful - The new DBX Series amp from EDGE Car Audio



EDGE

DBX SERIES



- CLASS D MONOBLOCK POWER AMPLIFIERS
- BUILT IN ACTIVE CROSSOVER WITH LPF AND SUBSONIC FILTER
- PARAMETRIC BASS BOOST CIRCUIT WITH ADJUSTABLE FREQUENCY
- REMOTE LEVEL CONTROL
- RCA INPUT AND OUTPUT



Model	EDBX1800.1-E1	EDBX2200.1-E1
Configuration	Monoblock	Monoblock
Dimensions (H x W x D)	50mm (2") x 380mm (15") x 228mm (9")	50mm (2") x 490mm (19.3") x 228mm (9")
RMS @ 4Ω Mono	1 x 650 watts	1 x 850 watts
RMS @ 2Ω Mono	1 x 1200 watts	1 x 1600 watts
RMS @ 1Ω Mono	1 x 1800 watts	1 x 2200 watts
Maximum Power	3600 watts	4400 watts
Frequency Response	10Hz - 180Hz	10Hz - 180Hz
Crossover Type	LP / Subsonic	LP / Subsonic
Crossover Range	0hz - 180Hz	0hz - 180Hz
Recommended Fuse	180A (External fuse)	220A (External fuse)
Topology	Class D	Class D


DBX SERIES

DBX SERIES POWER AMPLIFIERS

2 and 4 channel stereo amplifiers feature in the DBX range perfect to power the DBX speakers, tweeters and subwoofers

The DBX series amplifiers have some fantastic unique features, the EDGE heatsink design has progressive fins promoting heat dispersion to keep the amps cool. The 2 and 4 channel class AB models feature a extended set of filters with the HPF up to 11KHz and the LPF to 4KHz giving much more control of your speakers than average amplifiers.

When enhanced power for your in car audio is your drive, the DBX series amps provide everything you need for high power high quality amplification.

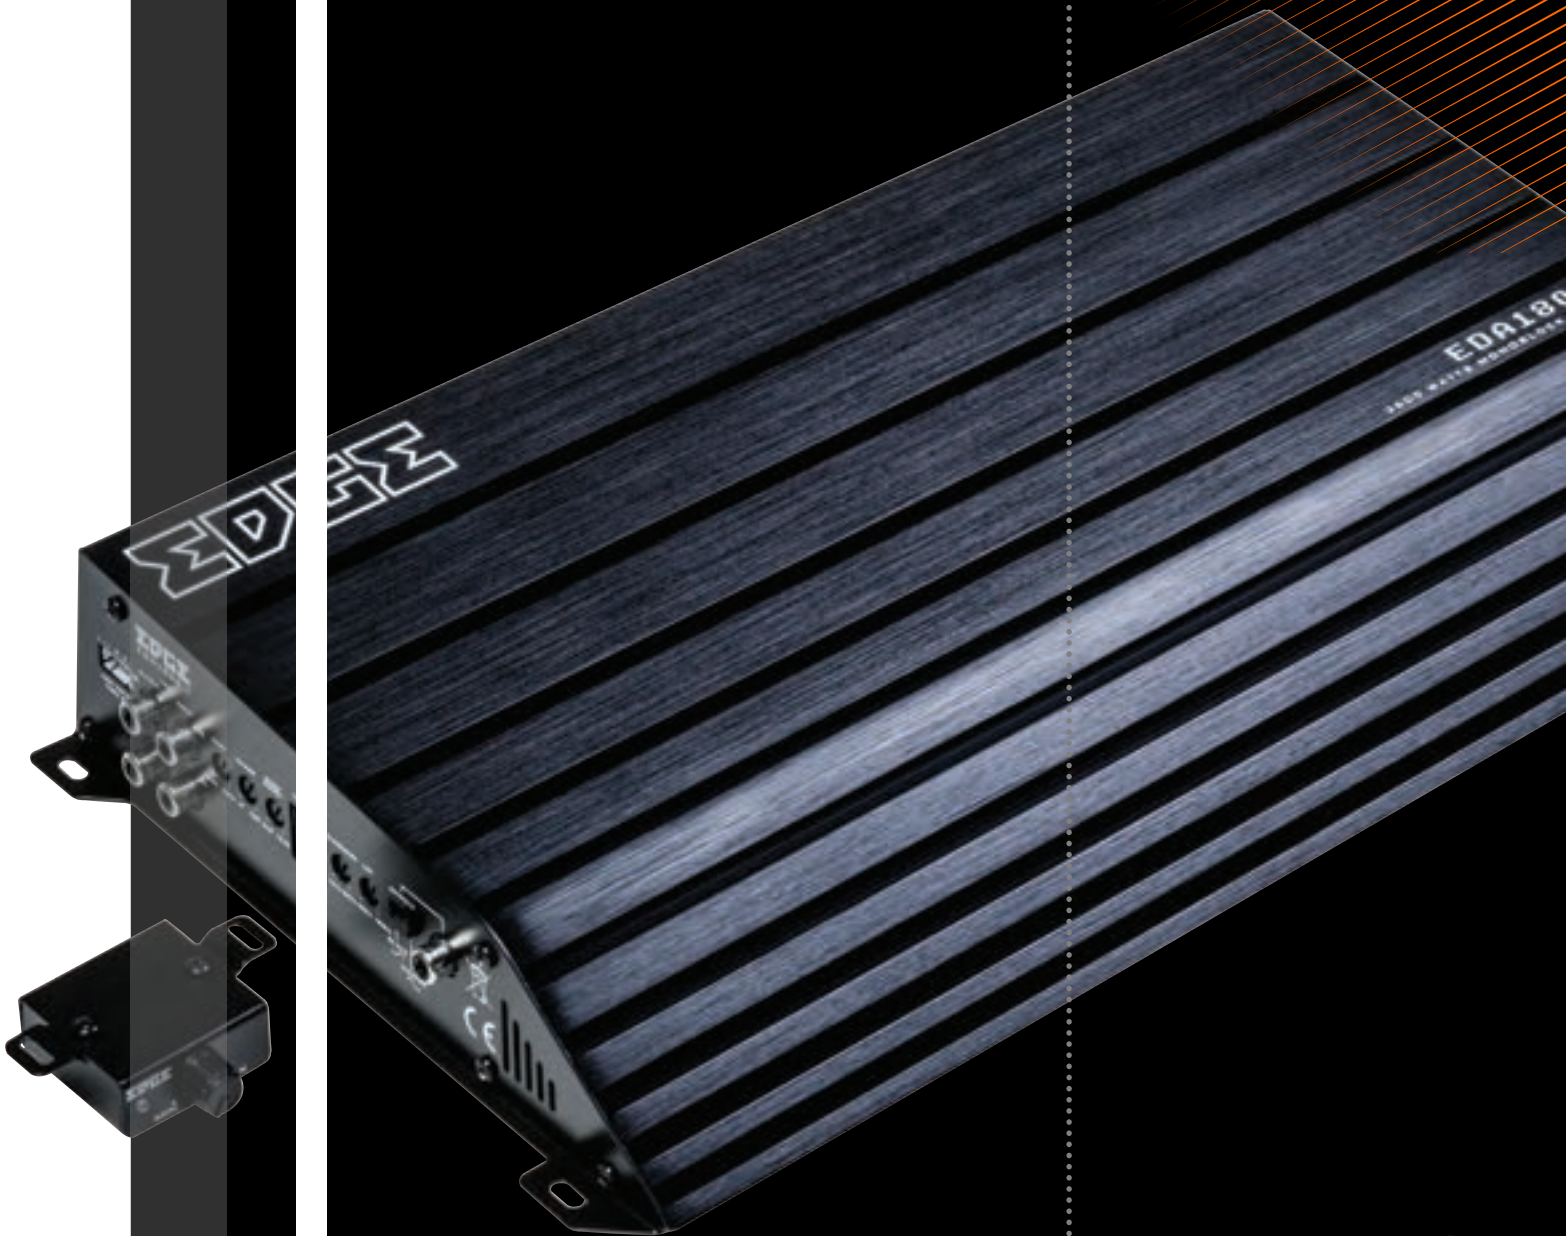

EDGE

DBX SERIES



- 2CH AND 4CH POWER AMPLIFIERS
- BUILT IN ACTIVE CROSSOVERS
- BASS BOOST CIRCUIT
- HIGH LEVEL INPUT WITH AUTO TURN ON FUNCTION



Model	EDA100.4-E7	EDA150.4-E7	EDA200.4-E7	EDA350.2-E7
Configuration	4 channel	4 channel	4 channel	2 channel
Dimensions (H x W x D)	58mm (2.3") x 280mm (11") x 224mm (8.8")	58mm (2.3") x 310mm (12.2") x 224mm (8.8")	58mm (2.3") x 350mm (13.8") x 224mm (8.8")	58mm (2.3") x 350mm (13.8") x 224mm (8.8")
RMS @ 4Ω Stereo	4 x 80 watts	4 x 100 watts	4 x 150 watts	2 x 250 watts
RMS @ 2Ω Stereo	4 x 100 watts	4 x 150 watts	4 x 200 watts	2 x 350 watts
RMS @ 4Ω Mono	2 x 200 watts	2 x 300 watts	2 x 400 watts	1 x 700 watts
RMS @ 2Ω Mono	N/A	N/A	N/A	N/A
RMS @ 1Ω Mono	N/A	N/A	N/A	N/A
Maximum Power	800 watts	1200 watts	1600 watts	1400 watts
Frequency Response	20Hz - 20kHz	20Hz - 20kHz	20Hz - 20kHz	20Hz - 20kHz
Crossover Type	LP / HP / Flat	LP / HP / Flat	LP / HP / Flat	LP / HP / Flat
Crossover Range	30Hz - 250Hz	30Hz - 250Hz	30Hz - 250Hz	30Hz - 250Hz
Recommended Fuse	2 x 20A	2 x 25A	2 x 35A	2 x 30A
Topology	Class AB	Class AB	Class AB	Class AB


DBX SERIES

DBX SERIES PRO AUDIO TWEETER


The EDBXPRO38T Is the Pro audio tweeter featured in the DBX Series range, design for loud high frequency reproduction

To produce the loud volume levels expected from Pro audio the DBX Series tweeter we engineered it to have a very high level of efficiency meaning it can very easily be very loud. We were able to do this by combining an aluminium diaphragm with a 25mm copper voice coil, paired with a ferrite magnet construction and a hand designed horn flange. These parts together created over 105dB of efficiency giving loud and clear high range frequency reproduction.

This high volume Bullet tweeter would be used in conjunction with any DBX series Pro speaker when your requirements is Hifi beating volume and crisp clear sound.

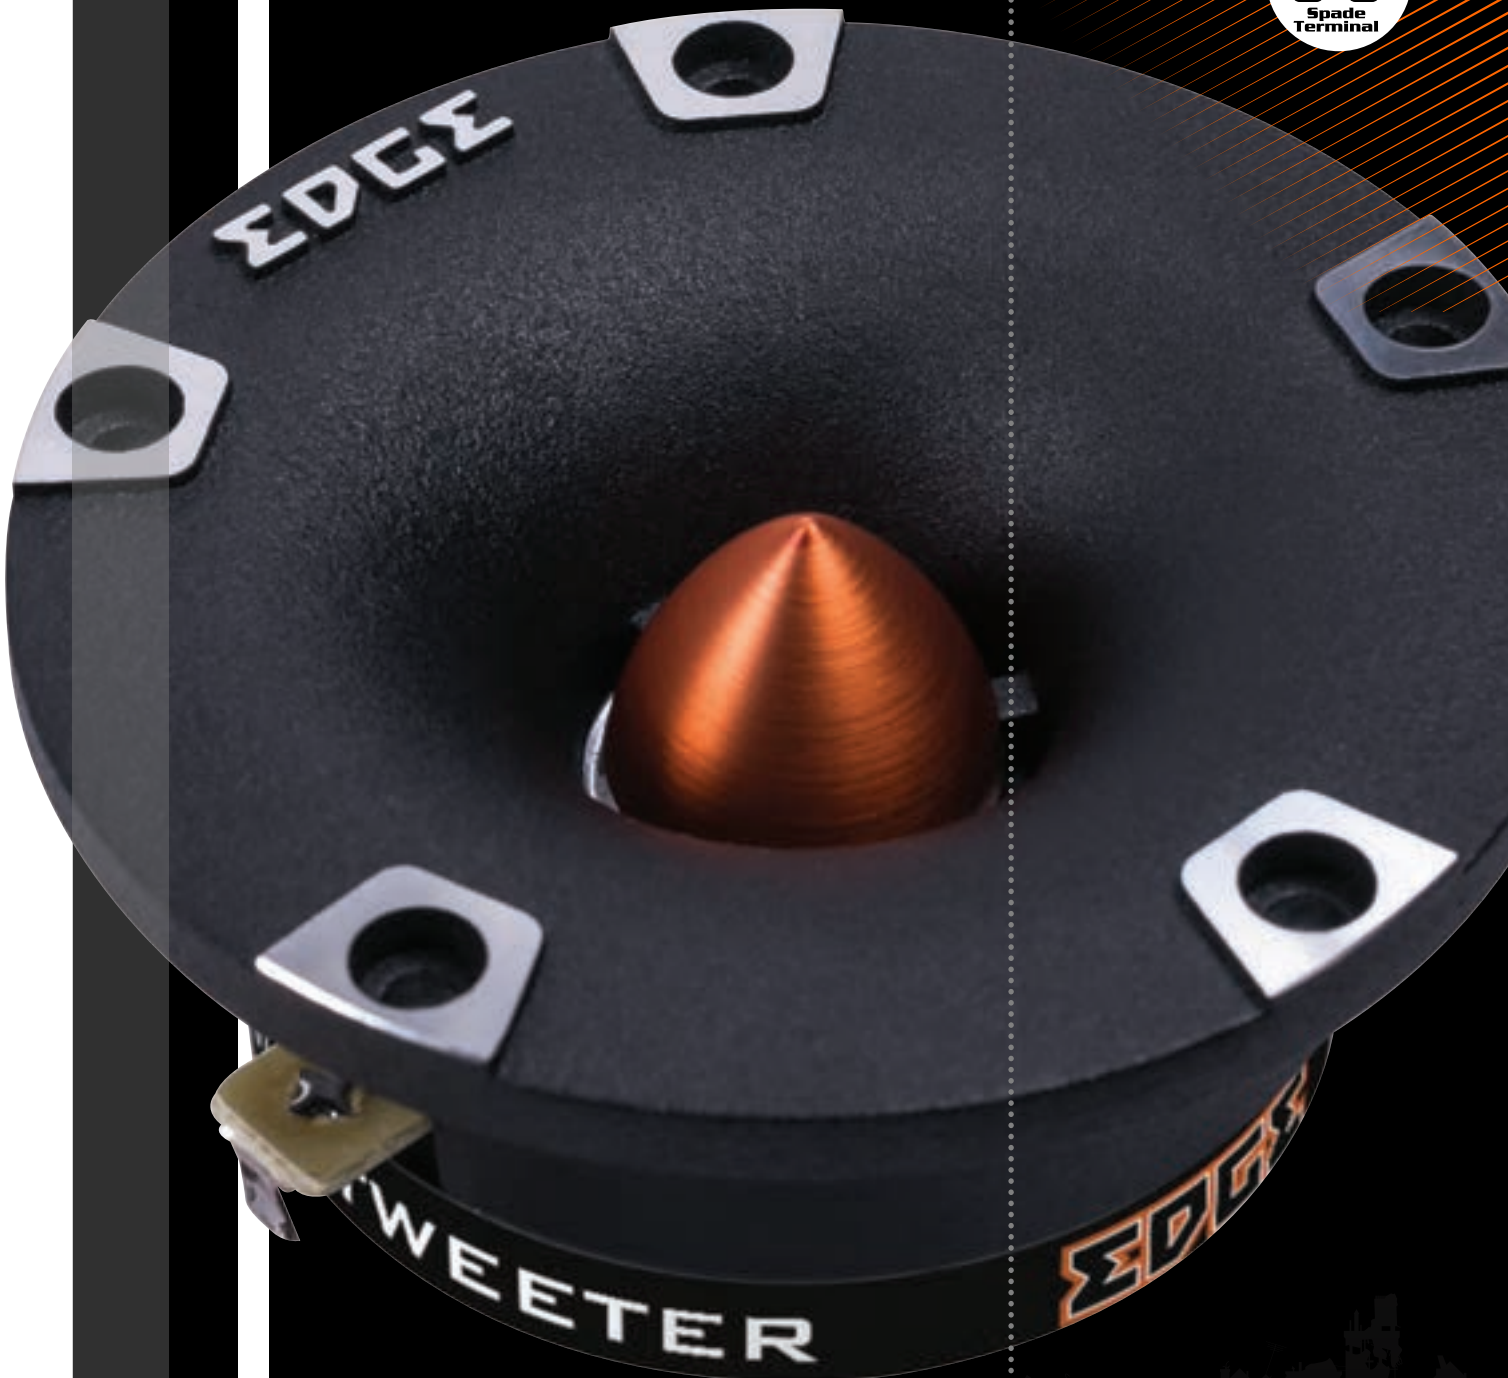

EDGE DBX

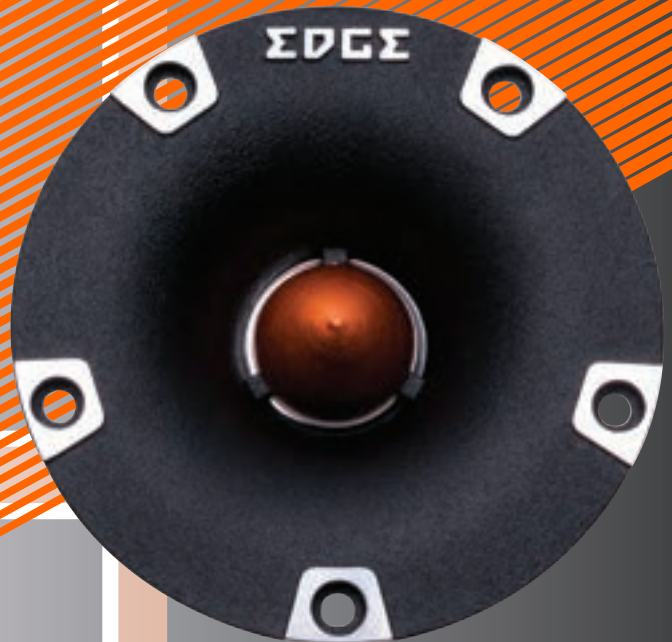

- PRO AUDIO BULLET TWEETER
- ALUMINIUM DIAPHRAGM
- CAST ALUMINIUM FLANGE
- 105DB SENSITIVITY
- 25MM VOICE COIL



Model	EDBXPRO38T-E0
Type	Pro audio Tweeter
Configuration	1-way
Speaker Size	3.7" (95mm)
RMS Power	75 watts
Peak Power	150 watts
Frequency Response	2kHz - 20kHz
Sensitivity	105dB
Impedance	4 Ohms
Mounting Depth	1.1" (28mm)
Mounting Diameter	2.85" (73mm)
Recommended Amplifier	EDA100.4-E7

DBX SERIES

DBX SERIES PRO AUDIO MIDRANGE

The DBX series Pro speakers features 6.5, 8 and 6x9 inch models designed for high volume sound reproduction.

Using all the experience and information we gathered from the development of the DB Series speakers the DBX Series are an advancement in performance, with subtle engineering changes, increased magnet sizes, redeveloped voice coils with precision designed spiders and cone to produce loud efficient sound.

The 6 inch and 6x9 inch model in the range features a full range design.

This wideband reproduces full range sound so can be used even without a tweeter! The DBX series is our second range of speakers and shows technology advancements for added volume, efficiency and sound quality.

Used when a Pro sound and high volume is required the DBX series speakers paired with DBX series tweeters delivers game changing performance.




EDGE DBX



FEATURES

- NON PRESSED PAPER CONE
- DUAL ROLL FOAM SURROUND
- POLY COTTON SPIDERS
- SPADE TERMINAL
- EVA GASKET



NEW



Model	EDBPRO65RX-E9	EDBPRO8RX-E9	EDBPRO6W-E0	EDBPRO69W-E9
Type	Pro Audio Midrange	Pro Audio Midrange	Pro Audio Midrange	Pro Audio Midrange
Configuration	1-way	1-way	1-way	1-way
Speaker Size	6.5" (165mm)	8" (200mm)	6.5" (165mm)	6" x 9" (160mm x 230mm)
RMS Power	130 watts	150 watts	150 watts	150 watts
Peak Power	260 watts	300 watts	300 watts	300 watts
Sensitivity	93dB	98dB	90dB	94dB
Frequency Response	160Hz - 10kHz	125Hz - 10kHz	100Hz - 20kHz	55Hz - 20kHz
Impedance	4 Ohms	4 Ohms	4 Ohms	4 Ohms
Mounting Depth	3.1" (78mm)	3.6" (91mm)	2.4" (61mm)	3.6" (91mm)
Mounting Diameter	5.7" (145mm)	7.4" (187mm)	5.5" (140mm)	5.7" (145mm) x 8.5" (215mm)
Recommended Amplifier	EDA350.2-E7	EDA350.2-E7	EDA350.2-E7	EDA350.2-E7

DBX SERIES

DBX SERIES NEO PRO AUDIO MIDRANGE

The DBX Series is the first to feature Neodymium speakers, lightweight, high efficiency pro speakers

A Neodymium speaker delivers the high performance of a large magnet ferrite magnet whilst saving weight and offering more motor force due to the high quality of the neodymium magnet system. The DBX Series Neo speakers offer the same pro audio sound as the ferrite with a touch more precision and ease.

Available in 5,65 and 8 inch models these can be paired with any bullet tweeter to give an excellent loud system set up delivering clear and precise sound reproduction.

In a situation where weight reduction is important but performance is key the DBX Series Neo pro speakers are the perfect product.



EDGE

DBX



- NON PRESSED PAPER CONE
- DUAL ROLL FOAM SURROUND
- POLY COTTON SPIDERS
- NEODYMIUM MAGNET
- EVA GASKET



Model	EDBXPRO5N-E9	EDBXPRO6N-E9	EDBXPRO8N-E9
Type	Pro Audio Midrange	Pro Audio Midrange	Pro Audio Midrange
Configuration	1-way	1-way	1-way
Speaker Size	5.25" (130mm)	6.6" (168mm)	8.1" (205mm)
RMS Power	90 watts	100 watts	110 watts
Peak Power	180 watts	200 watts	220 watts
Sensitivity	95dB	95dB	95dB
Frequency Response	180Hz - 8kHz	120Hz - 8kHz	100Hz - 10kHz
Impedance	4 Ohms	4 Ohms	4 Ohms
Mounting Depth	1.9" (49mm)	2.2" (57mm)	2.6" (65mm)
Mounting Diameter	4.5" (114mm)	5.8" (147mm)	7.2" (183mm)
Recommended Amplifier	EDA350.2-E7	EDA350.2-E7	EDA350.2-E7

DBX SERIES

DBX SERIES SUBWOOFERS

The DBX series Subwoofers are available in 12 and 15 inch varieties

This new subwoofer range features our new unique 2 piece dustcap which is included across our entire range. The 2pcs cap gives added rigidity to the cone for stronger tighter bass. This Subwoofer has a pressed steel torsion basket and double stacked high quality ferrite magnets for a competent level of motor force, paired with the motor structure we use a 2.5" inch voice coil and a non-pressed paper cone and high roll surround we are able to produce efficient, strong, powerful and accurate bass reproduction.

The DBX subwoofers give great you that wonderful added depth and volume off bass missing from a car sound system, tailored to give high performance at a competitive price



EDGE

DBX



FEATURES

- NON PRESSED PAPER CONE
- WIDE ROLL FOAM SURROUND
- 100 OZ DUAL STACKED MAGNET
- SPRING LOADED CONNECTORS
- Y35 FERRITE MAGNET
- DUAL 2 OHM IMPEDANCE
- DOUBLE STITCHED SURROUND

NEW NEW



Model	EDBX12D2-E0	EDBX15D2-E0
Cone	Non-pressed paper cone	Non-pressed paper cone
Surround	Big roll foam - dual stitched	Big roll foam - dual stitched
Dustcap	Custom tooled IMPP	Custom tooled IMPP
Voice Coil Former	2.5" black aluminium	2.5" black aluminium
Spider	1 layer black PC	2 layer
Gasket	Rubber	Rubber
Top Plate	10mm Black anodized	10mm Black anodized
T-Yoke	10mm Black anodized flat	10mm Black anodized flat
Terminal / Wire	Spring loaded connectors	Spring loaded connectors
Impedance	Dual 2Ω	Dual 2Ω
Peak / RMS Power	1500 / 750 watts	1800 / 900 watts
Magnet	156mm x 80mm x 20mm 2pcs	156mm x 80mm x 20mm 2pcs

DBX SERIES

DBX SERIES PRO AUDIO ENCLOSURES

As an expansion of the DB Series Pro box this improved model features the DBX series 6.5 inch mids.

Taking the design of the Pro box we had already developed, we utilised this to add the DBX Series ferrite midrange speaker alongside a compression driver for the high frequency reproduction.

Much like the previous model, this Pro box is designed with left and right terminals for stereo sound and ported for increased mid-bass reproduction.

The addition of the Pro box gives full range stereo sound at high volume to any system, brilliant for in vehicle and out of vehicle applications.



EDGE DBX



FEATURES

- FULL RANGE PRO AUDIO ENCLOSURE
- 4 X EDBXPRO6 MIDRANGE SPEAKERS
- 2 X EDPRO23ST TWEETERS
- DUAL PORTED ENCLOSURE
- DUAL INPUT WITH 2 X 2 OHM TERMINALS
- 1600 WATTS MAX POWER



Model	EDBXPROBOX-E9
Tweeter	EDPRO23ST
Midrange	EDBXPRO6
Midwoofer	N/A
Power (watts)	800W RMS / 1600W Peak
Impedance	Dual 2 Ohms
Dimensions (H x W x D)	160mm (6.3") x 900mm (35.4") x 248mm (9.8")
Frequency response	150Hz - 20kHz
Recommended Amplifier	EDA350.2

DBX SERIES

DBX SERIES COMPACT BASS ENCLOSURE

Small, compact and powerful, the DBX series 10 inch enclosure is designed to add that warming bass in a small footprint.

Built for performance within a compact size, the DBX series enclosure features a cast Aluminium housing for solid rigidity without flex or resonance.

This ensures a precise and deep sound with accurate sound reproduction.

With features such as high and low level input, 0/180 degree phase adjustment and a gain level bass remote control.

The DBX series enclosure is easy to fit and delivers everything you need for additional bass.


When bass is required and space is limited the DBX series compact enclosure is the perfect product for your bass enhancement.



High
Level
Input



Remote
Gain



Auto
Sense



Active
Enclosure



EDGE

DBX



FEATURES

- CAST ALUMINIUM CHASSIS
- AUTO TURN ON CIRCUIT
- 0° / 180° PHASE SHIFT CONTROL
- REMOTE BASS CONTROL
- LOW LEVEL INPUT
- HIGH LEVEL INPUT
- PROTECTIVE HEXAGON MESH



Model	EDBX10A-E0
Driver	EDBX10S
Type	Shallow active bass enclosure
Power (watts)	180W RMS / 360W Peak
Impedance	4 Ohms
Dimensions (H x W x D)	73mm (2.9") x 260mm (10.2") x 345mm (13.6")
Frequency response	350Hz - 20kHz
Configuration	2nd order acoustic suspension

STREET

SERIES

STREET SERIES SILK DOME TWEETER


SQL Tweeter - Designed for refined sound, the EDS SQL 1 Inch tweeter was developed for those who love high fidelity sound, accurate and smooth high frequency sound reproduction and the warmth of a silk dome. The unique horn design allows for a wide bandwidth to give a perfect pairing with any EDGE midrange.

SPL Tweeter - For those looking for accurate, crisp sound our Street series SPL tweeter offers just that, featuring a titanium dome the SPL tweeter produces high volume sound with a crisp, sharp, deadly accurate response which paired with any EDGE Pro mid can be an awesome combination



EDGE

STREET SERIES

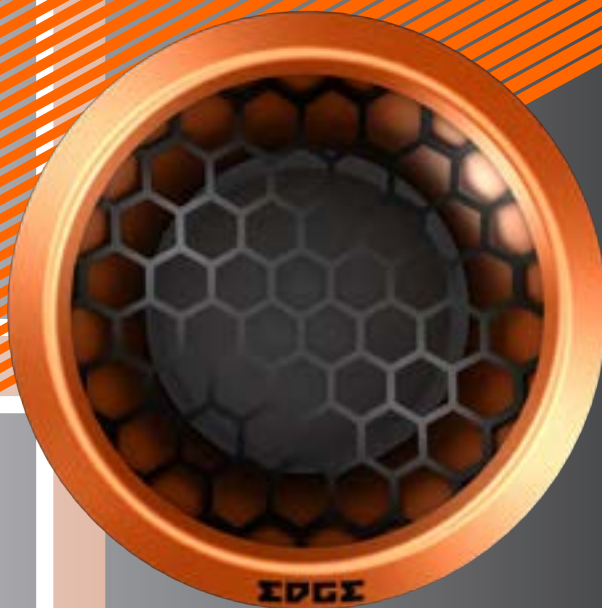


- SILK DOME AND TITANIUM TWEETER DIAPHRAGM VERSIONS
- SILK DOME DIAPHRAGM DELIVERS SMOOTH VOCAL REPRODUCTION AND EXTENDED HIGH FREQUENCY RESPONSE
- TITANIUM DOME DIAPHRAGM DELIVERS POWERFUL HIGH FREQUENCY RESPONSE WITH BOOSTED MIDRANGE OUTPUT
- HEXAGON MESH GRILLE
- ALLOY CHASSIS
- NEODYMIUM MAGNET
- HIGH SENSITIVITY



NEW

NEW



	Model	EDS1SQT-E0	EDS1SPLT-E0
	Type	Silk dome tweeter	Titanium dome tweeter
	Configuration	1-way	1-way
	Speaker Size	1.9" (48mm)	1.9" (48mm)
	RMS Power	100 watts	120 watts
	Peak Power	200 watts	240 watts
	Sensitivity	96dB	98dB
	Frequency Response	1.2kHz - 20kHz	1.2kHz - 20kHz
	Impedance	4 Ohms	4 Ohms
	Mounting Depth	0.9" (23mm)	0.9" (23mm)
	Mounting Diameter	1.7" (43mm)	1.7" (43mm)
	Recommended Amplifier	EDA100.4-E7	EDA100.4-E7

STREET

SERIES

Our most advanced level of coaxial and component speaker is featured in our Street range.

Available in sizes 4 inch through to 6x9 inch.

The coaxial feature unique 40 and 50mm tweeters which deliver a much wider bandwidth than a standard tweeter.

The component tweeter is built from entirely European parts. This is not your run of the mill tweeter!

This larger and wider design lends itself to much better sound staging and clarity, as the wider bandwidth component tweeter allows more sound to be played higher in the vehicle and the larger coaxial tweeter delivers crisper sound due to more midrange being produced by the tweeter.

When an upgrade is needed and easy fitment is required, the EDGE Street speakers is where you need to be.



STREET SERIES

STREET SERIES POWER AMPLIFIERS

Introducing in the Street series two brand new full range, full bridge amplifiers in two channel and Monoblock

The Street series amplifiers are new to the EDGE range, these amps feature Class D topology but use a full bridge method of power delivery.

This is more efficient method of converting DC power from your battery to AC output for your speakers. Full bridge technology allows us to generate large power in a tiny footprint.

The Custom tooled heatsink was designed with over engineered fins for excellent heat dissipation ensuring the amp works well and cools correctly.

All models have built in active crossovers and bass boost and can be used to power subwoofers, midrange drivers or tweeters.

Compact and powerful, the perfect amplifier upgrade for those wanting more than the norm.



EDGE

STREET SERIES



FEATURES

- 2CH AND MONOBLOCK POWER AMPLIFIERS
- BUILT IN ACTIVE CROSSOVERS
- BASS BOOST CIRCUIT
- ULTRA EFFICIENT CLASS D TOPOLOGY
- WIDEBAND FREQUENCY RESPONSE UP TO 20KHZ
- FULL BRIDGE TECHNOLOGY
- COMPACT FOOTPRINT

NEW

NEW



Model	EDS500.2FD-EO	EDS3000.1FD-EO
Configuration	2 channel	Monoblock
Dimensions (H x W x D)	63mm (2.5") x 125mm (6.9") x 232mm (9.1")	63mm (2.5") x 184mm (7.2") x 232mm (9.1")
RMS @ 4Ω Stereo	2 x 225 watts	N/A
RMS @ 2Ω Stereo	2 x 325 watts	N/A
RMS @ 1Ω Stereo	2 x 525 watts	N/A
RMS @ 4Ω Mono	1 x 650 watts	1 x 1100 watts
RMS @ 2Ω Mono	1 x 1050 watts	1 x 2050 watts
RMS @ 1Ω Mono	N/A	1 x 3300 watts
Maximum Power	2100 watts	6600 watts
Frequency Response	20Hz - 20kHz	15Hz - 20kHz
Crossover Type	LP / HP	LP / HP
Crossover Range	15Hz - 15kHz	15Hz - 20kHz
Recommended Fuse	90A External F use	250A External F use
Topology	Class D	Class D

STREET SERIES

STREET SERIES PRO AUDIO TWEETERS


The Street series from EDGE is where our first Compression Horn tweeter is introduced.

Featuring a high quality Neodymium magnet structure the EDPRO23ST has wonderful control over the voice coil.

The advantage of this style horn tweeter over the more traditional flat bullet tweeter is the extended horn length increased the sound quality and clarity along side a boost in the frequency range it can play.

Its compact footprint makes it easy to install if space is limited. This tweeter uses high efficiency to deliver high volume high frequency sound reproduction with wonderful clarity and accuracy.

Just like with any EDGE Pro line, this product is perfect for installing when Hifi sound is not enough, pairing with any Street pro midrange will give you an awesome full range combination.

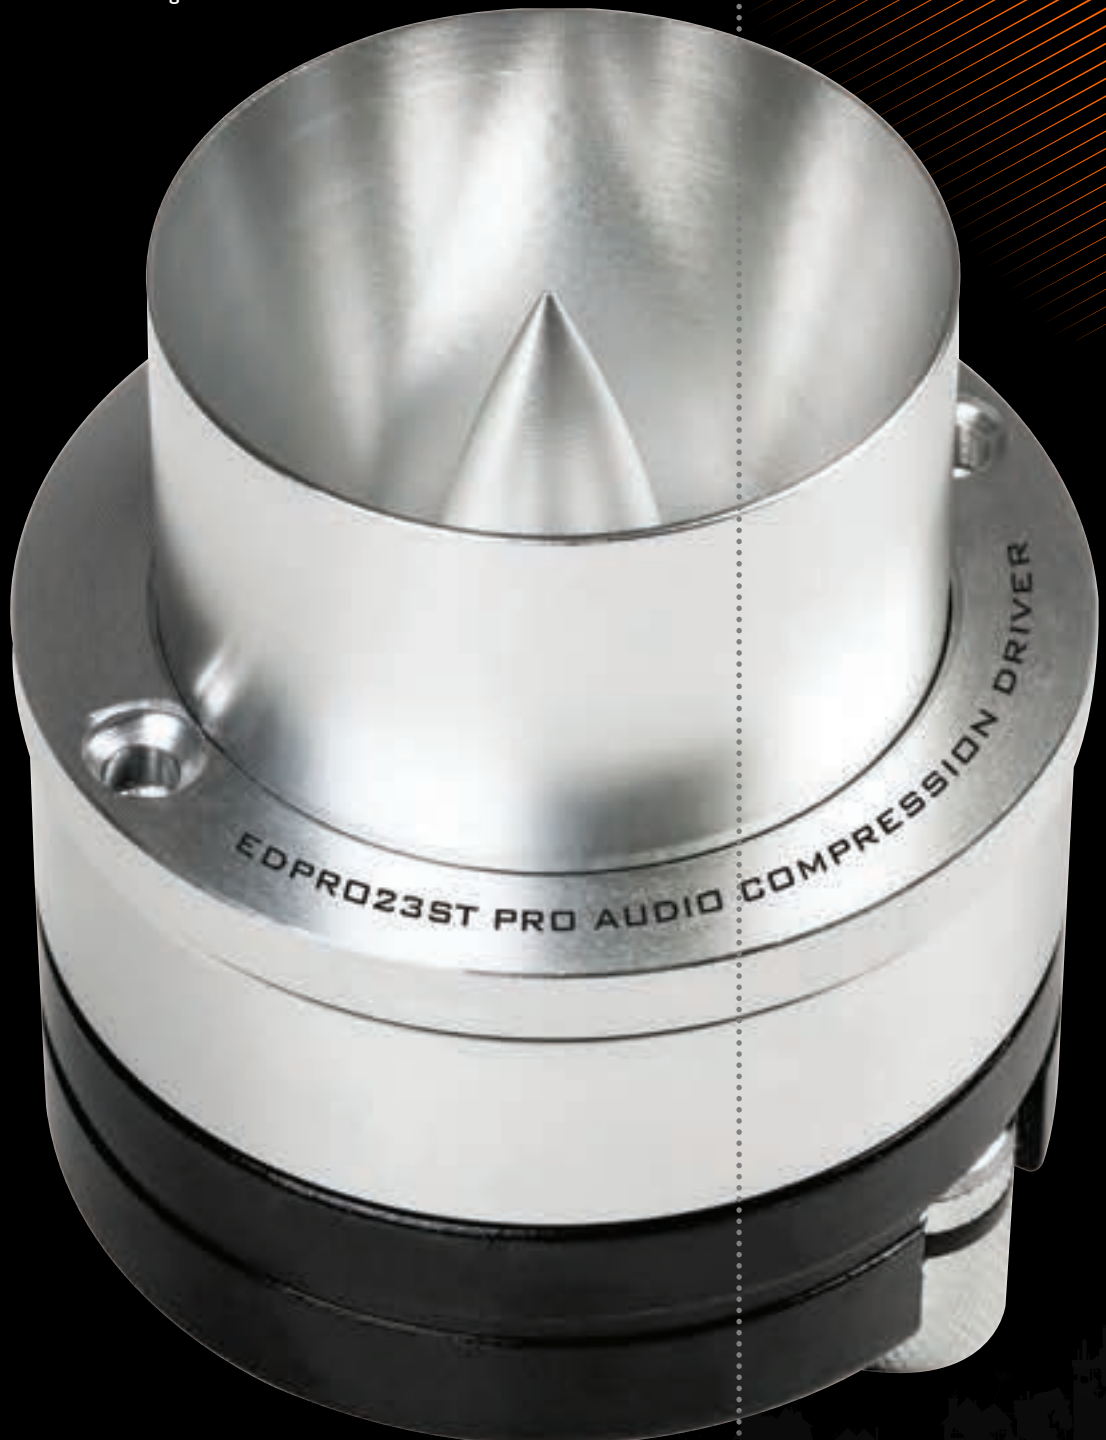

EDGE

STREET SERIES



FEATURES

- PRO AUDIO COMPRESSION DRIVERS
- TITANIUM DIAPHRAGM
- CAST ALUMINIUM FLANGE
- FERRO-FLUID VOICE COIL COOLING
- SCREW TERMINAL

Model	EDPRO23ST-E7
Type	Pro audio Tweeter
Configuration	1-way
Speaker Size	2.3" (58mm)
RMS Power	100 watts
Peak Power	200 watts
Frequency Response	2kHz - 20kHz
Sensitivity	106dB
Impedance	4 Ohms
Mounting Depth	1.3" (39mm)
Mounting Diameter	1.7" (43mm)
Recommended Amplifier	EDA100.4-E7

STREET SERIES

STREET SERIES PRO AUDIO NEO MIDRANGE

The Street series Pro midrange are our top tier Neodymium speakers available in 5.25, 6.5 and 8 inch variants

As a progression from the DBX series neo midrange driver, we developed the Street series, with an increased magnet structure and larger voice coil Street series have an increased power capability while still remaining lightweight and with a nice feature of spring loaded terminals for easy wiring installation.

By using high grade Neodymium magnets, Copper voice coils and precision engineered soft parts we are able to produce high-volume wideband response with real clarity and accuracy.

If high performance and weight saving is what you need the Street series neo midranges are the perfect product for you.



EDGE
Pro

STREET
SERIES

EDGE

STREET SERIES



FEATURES

- NEODYMIUM MAGNETS
- NON PRESSED PAPER CONE
- DUAL ROLL FOAM SURROUND
- POLY COTTON SPIDERS
- SPRING LOADED TERMINAL

NEW



NEW



NEW



Model	EDSPRO5N-E0	EDSPRO6N-E0	EDSPRO8N-E0
Type	Pro Audio Midrange	Pro Audio Midrange	Pro Audio Midrange
Configuration	1-way	1-way	1-way
Speaker Size	5.25" (130mm)	6.5" (165mm)	8" (200mm)
RMS Power	130 watts	150 watts	160 watts
Peak Power	260 watts	300 watts	320 watts
Sensitivity	93dB	95dB	98dB
Frequency Response	150Hz - 11kHz	120Hz - 10.5kHz	100Hz - 10.5kHz
Impedance	4 Ohms	4 Ohms	4 Ohms
Mounting Depth	2.3" (59mm)	3" (75mm)	3.3" (85mm)
Mounting Diameter	4.8" (121)	5.8" (147mm)	7.4" (187mm)
Recommended Amplifier	EDA350.2-E7	EDA350.2-E7	EDA350.2-E7

STREET SERIES

STREET SERIES PRO AUDIO MIDRANGE

The Street series Pro midrange are our top tier Neodymium speakers available in 5.25, 6.5 and 8 inch variants

As a progression from the DBX series neo midrange driver, we developed the Street series, with an increased magnet structure and larger voice coil Street series have an increased power capability while still remaining lightweight and with a nice feature of spring loaded terminals for easy wiring installation.

By using high grade Neodymium magnets, Copper voice coils and precision engineered soft parts we are able to produce high volume wideband response with real clarity and accuracy.

If high performance and weight saving is what you need the Street series neo midranges are the perfect product for you.



EDGE

STREET SERIES



FEATURES

- NON PRESSED PAPER CONE
- DUAL ROLL FOAM SURROUND
- POLY COTTON SPIDERS
- SPADE TERMINAL
- EVA GASKET



NEW



Model	EDSPRO6-E0
Type	Pro Audio Midrange
Configuration	1-way
Speaker Size	6.5" (165mm)
RMS Power	200 watts
Peak Power	400 watts
Sensitivity	96dB
Frequency Response	90Hz - 20 kHz
Impedance	4 Ohms
Mounting Depth	2.5" (64mm)
Mounting Diameter	5.5" (140mm)
Recommended Amplifier	EDA350.2-E7

STREET SERIES

STREET SERIES SUBWOOFERS

Introducing the trunk thumping Street series subwoofers from EDGE

The Street series subs have been designed from the ground up to produce awesome musical bass, using double stacked magnets to generate large magnetic force we are able to control the subwoofer with pin point accuracy while maintaining a high level of excursion and SPL.

Available currently in 10, 12, 15 and 18 inch variants. Using polycotton spiders, non-pressed paper cones and stitched tinsel leads, we are able to create a high quality product that produces accurate loud bass.

For anyone looking for hard hitting street bass look no further than our Street series subs.



EDGE

STREET SERIES



FEATURES

- NON PRESSED PAPER CONE
- WIDE ROLL FOAM SURROUND
- BLACK POLY COTTON SPIDERS
- DUAL Y35 FERRITE MAGNETS
- 3" BLACK ALUMINIUM VOICE COIL

NEW

NEW

NEW

NEW



Model	EDS10D2-E0	EDS12D2-E0	EDS15D2-E0	EDS18D2-E0
Cone	Non-pressed paper cone	Non-pressed paper cone	Non-pressed paper cone	Non-pressed paper cone
Surround	Big roll foam - stitched	Big roll foam - stitched	Big roll foam - stitched	Big roll foam - stitched
Dustcap	2 part IMPP	2 part IMPP	2 part IMPP	2 part IMPP
Voice Coil	38mm Copper winding	38mm Copper winding	45mm Copper winding	45mm Copper winding
Spider	2pcs black PC	2pcs black PC	2pcs black PC	4pcs black PC
Gasket	Rubber	Rubber	Rubber	Rubber
Top Plate	10mm Black anodized	10mm Black anodized	12mm Black anodized	12mm Black anodized
T-Yoke	8mm Bumped	8mm Bumped	10mm Bumped	10mm Bumped
Terminal / Wire	Terminal	Terminal	Terminal	Terminal
Impedance	Dual 2Ω	Dual 2Ω	Dual 2Ω	Dual 2Ω
Peak / RMS Power	2400 watts / 1200 watts	2800 watts / 1400 watts	3200 watts / 1600 watts	3600 watts / 1800 watts
Magnet	170mm x 20mm 2pcs 120oz	170mm x 20mm 2pcs 120oz	190mm x 20mm 2pcs 150oz	190mm x 20mm 2pcs 150oz

XTREME SERIES

XTREME SERIES PRO AUDIO TWEETERS

Our Xtreme Series is where things get really serious.

The EDPRO22T Neodymium compression horn tweeter uses a Neodymium motor to create the high levels of magnetic force required to give us accurate control of the high frequencies created by these Horn tweeters.

The elongated Aluminium horn gives a nice wide frequency range and better sound quality than the traditional flat fronted bullet tweeter.

Featuring high quality machined Aluminium parts, screw down cable terminals and even a protective capacitor this product comes with everything you need for a high level installation.

For when the normal is too bland, the Xtreme series tweeter is going to set the bar high for loud, clear high frequency sound.




EDGE

XTREME SERIES



FEATURES

- PRO AUDIO COMPRESSION DRIVERS
- TITANIUM DIAPHRAGM
- CAST ALUMINIUM FLANGE
- FERRO-F LIUID VOICE COIL COOLING
- SCREW TERMINAL



Model	EDPRO22T-E4
Type	Pro audio Tweeter
Configuration	1-way
Speaker Size	2.2" (58mm)
RMS Power	100 watts
Peak Power	300 watts
Frequency Response	2kHz - 20kHz
Sensitivity	105dB
Impedance	4 Ohms
Mounting Depth	1.3" (39mm)
Mounting Diameter	1.7" (43mm)
Recommended Amplifier	EDA100.4-E7

XTREME SERIES

XTREME SERIES PRO AUDIO DRIVER

The Xtreme Series from EDGE features a new style product not seen elsewhere in the range the range.

This high frequency driver is something different to a traditional compression tweeter, the driver uses a high power motor to drive the large Titanium diaphragm and voice coils with precision, this is then paired with a massive 6.5 inch flared horn design. The large flared horn allows the pro driver to play significantly lower than a tweeter.

The EDPRO45T delivers frequencies as low as 1000Hz which allows more of the directional sound to come form one location.

The horn itself also allows the sound to be smoother as it has a more progressive dispersion.

This gives increased clarity, efficiency and volume to the sound.

Adding an Xtreme series Horn driver is for those wanting to take Pro audio to the next level producing concert level volume and clarity from the road!



EDGE

XTREME SERIES



FEATURES

- PRO AUDIO COMPRESSION DRIVERS
- TITANIUM DIAPHRAGM
- FLARED HORN DESIGN
- FERRO-F LIUID VOICE COIL COOLING
- SPRING TERMINAL

Model	EDPRO45T-E6
Type	Compression driver
Configuration	1-way
Speaker Size	6.5" (165mm)
RMS Power	80 watts
Peak Power	240 watts
Frequency Response	1.2kHz - 20kHz
Sensitivity	105dB
Impedance	6.6 Ohms
Mounting Depth	3.7" (95mm)
Mounting Diameter	5.3" (135mm)
Recommended Amplifier	EDA100.4-E7

XTREME SERIES

XTREME SERIES PRO AUDIO MIDRANGE

To produce our latest range of Xtreme Series Pro speakers we went on a mission to develop speakers with different characteristics to set us apart from the competition. Our engineers used their experience in speaker design to utilise the same speaker component parts but develop multiple sound characteristics designed to suit different applications.

The Xtreme series speakers have 3 characterises.

The "Power" model has a slightly larger motor giving more volume and more attack at the mid-bass level.

The "Linear" model has the flattest response for those who like that clean flat response.

Finally the "Wideband" model has the widest frequency response for those who like there speakers to play right across the spectrum.

Our R&D team looked at the Pro audio range and saw the need and requirement for an multiway pro audio system, so we developed this in the Xtreme range. Featuring both Mid-bass and Midrange drivers the speakers in this range can be paired with an EDGE Pro Audio tweeter or driver to create a 3 way pro audio set up.

The speakers in this range feature the biggest voice coils we offer as well as the biggest motors, this gives huge power but also a incredible level of control. The 6 and 8 BP are designed to give hard hitting mid-bass attack.

This would then be paired with the 8 E for the midrange and vocal reproduction.

No matter your preference in sound the Xtreme series speakers have an option for you, loud, clear, wide or all rolled together.



Model	EDPRO8E-E8	EDPRO6BP-E8	EDPRO8BP-E8
Type	Pro Audio Midrange	Pro Audio Midwoofer	Pro Audio Midwoofer
Best Partner Speaker	EDPRO8BP-E8	EDPRO6E-E8	EDPRO8E-E8
Speaker Size	8" (200mm)	6.5" (165mm)	8" (200mm)
RMS Power	175 watts	175 watts	250 watts
Peak Power	350 watts	350 watts	500 watts
Sensitivity	95dB	90dB	91dB
Frequency Response	65Hz - 10kHz	80Hz - 10kHz	65Hz - 10kHz
Impedance	4 Ohms	4 Ohms	4 Ohms
Mounting Depth	3.6" (91mm)	2.4" (67mm)	3.2" (82mm)
Mounting Diameter	7.4" (187mm)	5.6" (143mm)	7.2" (183mm)
Recommended Amplifier	EDA350.2-E7	EDA350.2-E7	EDA350.2-E7

EDGE

XTREME SERIES



FEATURES

- NON PRESSED PAPER CONE
- DUAL ROLL FOAM SURROUND
- POLY COTTON SPIDERS
- SPRING TERMINAL
- EVA GASKET



Model	EDXPRO6W-E9	EDXPRO8W-E9	EDXPRO6L-E9	EDXPRO8L-E9	EDXPRO6P-E9
Type	Pro Audio Midrange	Pro Audio Midrange	Pro Audio Midrange	Pro Audio Midrange	Pro Audio Midrange
Sound profile	Wide Bandwidth	Wide Bandwidth	Linear Response	Linear Response	Powerful Bass
Speaker Size	6.5" (165mm)	8" (200mm)	6.5" (165mm)	8" (200mm)	6.5" (165mm)
RMS Power	120 watts	150 watts	130 watts	150 watts	150 watts
Peak Power	260 watts	300 watts	260 watts	300 watts	300 watts
Sensitivity	94dB	96dB	93dB	94dB	95dB
Frequency Response	125Hz - 18kHz	95Hz - 18kHz	160Hz - 10kHz	120Hz - 10kHz	125Hz - 10kHz
Impedance	4 Ohms	4 Ohms	4 Ohms	4 Ohms	4 Ohms
Mounting Depth	3.1" (78mm)	3.2" (82mm)	3.1" (78mm)	3.2" (82mm)	3.1" (82mm)
Mounting Diameter	5.7" (145mm)	7.2" (183mm)	5.7" (145mm)	7.2" (183mm)	5.7" (145mm)
Recommended Amplifier	EDA350.2-E7	EDA350.2-E7	EDA350.2-E7	EDA350.2-E7	EDA350.2-E7

XTRME SERIES

XTRME SERIES POWER AMPLIFIERS

The Xtreme series from EDGE offers the big brothers to the new Street series Full bridge full range class D amplifiers in single channel and stereo applications.

The Xtreme series amplifiers are new to the EDGE range and feature Class D topology but use a full bridge method of power delivery.

This is more efficient method of converting DC power from your battery to AC output for your speakers. Full bridge technology allows us to generate large power in a tiny footprint.

The custom tooled heatsink was designed with over engineered fins for excellent heat dissipation ensuring the amp works well and cools correctly.

All models have built in active crossovers and bass boost and can be used to power subwoofers, midrange drivers or tweeters.

To power Xtreme series speakers and subwoofers you need Xtreme amplifiers.

The 5000 watt single channel, 1800 watts per channel 2 channel and 800 watts per channel 4 channel amplifiers will certainly do that.



EDGE

XTREME SERIES



FEATURES

- 2CH 4CH AND MONOBLOCK POWER AMPLIFIERS
- BUILT IN ACTIVE CROSSOVERS
- BASS BOOST CIRCUIT
- ULTRA EFFICIENT CLASS D TOPOLOGY
- WIDEBAND FREQUENCY RESPONSE UP TO 20KHZ
- FULL BRIDGE TECHNOLOGY
- COMPACT FOOTPRINT

NEW **NEW** **NEW**



Model	EDX1800.2FD-E0	EDX800.4FD-E0	EDX5000.1FD-E0
Configuration	2 channel	4 channel	Monoblock
Dimensions (H x W x D)	63mm (2.5") x 264mm (10.4") x 232mm (9.1")	63mm (2.5") x 264mm (10.4") x 232mm (9.1")	63mm (2.5") x 264mm (10.4") x 232mm (9.1")
RMS @ 4Ω Stereo	2 x 850 watts	4 x 310 watts	N/A
RMS @ 2Ω Stereo	2 x 1250 watts	4 x 500 watts	N/A
RMS @ 1Ω Stereo	2 x 1800 watts	4 x 800 watts	N/A
RMS @ 4Ω Mono	1 x 2500 watts	2 x 1000 watts	1 x 1800 watts
RMS @ 2Ω Mono	1 x 3600 watts	2 x 1600 watts	1 x 2500 watts
RMS @ 1Ω Mono	N/A	N/A	1 x 5000 watts
Maximum Power	7200 watts	6400 watts	10,000 watts
Frequency Response	20Hz - 20kHz	20Hz - 20kHz	15Hz - 20kHz
Crossover Type	LP / HP	LP / HP / FLAT	LP / HP
Crossover Range	15Hz - 15kHz	15Hz - 6kHz	15Hz - 20Hz
Recommended Fuse	300A External F use	300A External F use	350A External F use
Topology	Class D	Class D	Class D

XTREME SERIES

XTREME SERIES PRO AUDIO SUBWOOFER

Living up to the series name Xtreme from EDGE delivers our Pro Subwoofer, for massive hard hitting high subwoofer bass and punch.


The EDPRO12PW is the unique Pro audio subwoofer from EDGE which features the same style composite paper cones of a Pro audio speaker with the cloth surround but beefed up!

Triple roll surround and a much stronger cone paired with a 4 inch Copper voice coil with a huge magnet assembly all on a cast Aluminium basket.

This product is for those striving to recreate the concert sound from the car.

With the capability to make powerful transients that will make you blink, the Xtreme series Pro subwoofer finalises the multi speaker pro set up giving the option to create that full rounded sound with the attack, clarity and volume you are looking for.

When high bass with snap and punch is your desire, this Pro subwoofer paired with a high power single channel amplifier will deliver everything you are looking for.



EDGE

XTREME SERIES



FEATURES

- 12" PRO AUDIO SUBWOOFER
- TRIPLE ROLL CLOTH SURROUND
- COMPOSITE WOOFER CONE
- 4" VOICE COIL
- CAST ALUMINIUM BASKET
- SPRING TERMINAL



Model	EDPRO12PW-E7
Type	Pro Audio Woofer
Configuration	1-way
Speaker Size	12" (323mm)
RMS Power	1000 watts
Peak Power	2000 watts
Sensitivity	95dB
Frequency Response	125Hz - 10kHz
Impedance	4Ω
Mounting Depth	3.6" (91mm)
Mounting Diameter	7.4" (187mm)
Recommended Amplifier	EDA350.2-E7

XTRME SERIES

Introducing from EDGE the Xtreme series subwoofers, for those looking for deep, high power, street thumping bass our subwoofers are for you, multiple models and sizes available complete with a brand new range.

Our Xtreme series subwoofers were designed with a combination of street bass and competition bass in mind. All the subwoofers feature massive triple stacked motor structures across 3 baskets types all constructed from best aluminium for strength and rigidity, paired with Polycotton spiders, stitched tinsel leads, non pressed paper cones and 3 inch Voice coils we have a variant of power and sizes available. The new for 2021 feature a brand new custom tooled basket for increased excursion on the low bass and a even wider foam surround to cope with this excursion! This is paired with our brand new custom tooled 2 piece dustcap giving us a unique subwoofer!

If Pushing the limits of excursion and SPL our Xtreme series subwoofers have been designed with you in mind!



Model	EDX10D2-E0	EDX12D2-E0	EDX15D2-E0
Cone	Non-pressed paper cone	Non-pressed paper cone	Non-pressed paper cone
Surround	Big roll foam - dual stitched	Big roll foam - dual stitched	Big roll foam - dual stitched
Dustcap	Custom tooled IMPP	Custom tooled IMPP	Custom tooled IMPP
Voice Coil Former	3" black aluminium	3" black aluminium	3" black aluminium
Spider	2pcs black PC	3pcs black PC	4pcs black PC
Gasket	Rubber	Rubber	Rubber
Top Plate	8mm Black anodized	15mm Black anodized	15mm Black anodized
T-Yoke	10mm Black anodized flat	15mm Black anodized flat	25mm Black anodized flat
Terminal / Wire	Spring loaded connectors	Spring loaded connectors	Spring loaded connectors
Impedance	Dual 2Ω	Dual 2Ω	Dual 2Ω
RMS Power	1500 watts	1750 watts	2000 watts
Magnet	190mm x 95mm x 20mm 3pcs	190mm x 95mm x 20mm 3pcs	190mm x 95mm x 20mm 3pcs

EDGE

XTREME SERIES



FEATURES

- NON PRESSED PAPER CONE
- WIDE ROLL FOAM SURROUND
- 10" BLACK NOMEX SPIDERS
- TRIPLE Y3S FERRITE MAGNETS
- USA MADE 4 LAYER BLACK ALUMINIUM VOICE COIL



Model	EDP122SPL-E6	EDX12D1-E7	EDX15D1-E7	EDX18D1-E7
Cone	Non-pressed paper cone	Non-pressed paper cone	Non-pressed paper cone	Non-pressed paper cone
Surround	Big roll foam - stitched	Big roll foam - stitched	Big roll foam - stitched	Big roll foam - stitched
Dustcap	Black PP	Black PP	Black PP	Black PP
Voice Coil	55mm Copper winding	70mm Copper winding	70mm Copper winding	70mm Copper winding
Spider	3pcs PC	4pcs black NOMEX	4pcs black NOMEX	4pcs black NOMEX + 2pcs PC
Gasket	Rubber	Rubber	Rubber	Rubber
Top Plate	20mm Black anodized	25mm Black anodized	25mm Black anodized	25mm Black anodized
T-Yoke	28mm Flat	30mm Flat	30mm Flat	30mm Flat
Terminal / Wire	10 AWG Wire	8 awg Cable	8 awg Cable	8 awg Cable
Impedance	Dual 2Ω	Dual 1Ω	Dual 1Ω	Dual 1Ω
RMS Power	2500 watts	3000 watts	3000 watts	3000 watts
Magnet	210mm x 90mm x 25mm 2pcs	220mm x 110mm x 25mm 3pcs	220mm x 110mm x 25mm 3pcs	250mm x 110mm x 25mm 3pcs

XTRME SERIES

XTRME SERIES PRO AUDIO ENCLOSURES

THE Xtreme series Pro Box takes the entry level models to the extreme feature the 3 way Pro speaker set up.

To push the Pro box to its limit we produced the Xtreme version which features a 3 way set up with the 6BP Pro midbass, 6E Pro midrange and the 22T Pro compression tweeter, this set up gives a rounded clear sound with unrivalled volume and awesome attack from the use of the BP mid-bass.

Paired with a high power Xtreme series 2 channel amplifier this Pro box can be used in or out of the car to deliver massive volume and clarity sound with can be projected and heard from miles around.

The addition of the Pro box gives full range stereo sound at high volume to any system.

Perfect for in vehicle and out of vehicle applications.



EDGE

XTREME SERIES



FEATURES

- FULL RANGE PRO AUDIO ENCLOSURE
- 2 X EDPRO6E MIDRANGE SPEAKERS
- 2 X EDPRO6BP MIDWOOFERS
- 2 X EDPRO22T TWEETERS
- DUAL PORTED ENCLOSURE
- DUAL INPUT WITH 2 X 2 OHM TERMINALS
- 1900 WATTS MAX POWER



Model	EDXPROBOX-E9
Tweeter	EDPRO22T
Midrange	EDPRO6E
Midwoofer	EDPRO6BP
Power (watts)	950W RMS / 1900W Peak
Impedance	Dual 2 Ohms
Dimensions (H x W x D)	160mm (6.3") x 900mm (35.4") x 248mm (9.8")
Frequency response	150Hz - 20kHz
Recommended Amplifier	EDA350.2

UNLIMITED

SERIES

UNLIMITED SERIES SUBWOOFERS

Introducing from EDGE Car Audio the brand new Unlimited Series competition grade subwoofers.

This latest model in the Unlimited range is the most impactful and powerful subwoofer we have ever developed with some enhanced technology for performance optimisation.

The EDU subwoofers feature a massive triple stacked ferrite motor with extended top plate and T yolk design for extended woofer excursion and control. This magnet structure is enhanced by our unique "Heat Raptor". The Heat Raptor is a unique heatsink concept which draws heat away from the magnet into the alloy fins, allowing the magnet and voice coil to stay much cooler during playback which in turn increases the performance of the subwoofer.

The soft parts of the subwoofer also feature some unique additions in our EDGE subwoofer range.

The EDU subwoofer has quad layered poly cotton spiders with dual woven tinsel leads for high levels of excursion control, paired with a 4 inch, 8 layer flat wound USA made voice coil with up to 5000 watts power handling. The cone is a none pressed paper cone enhanced with Kevlar for additional strength and paired with a full carbon dustcap for extra rigidity. Finished with our ribbed surround which gives greater excursion control and no deformation of the surround when pushed to extremes.



EDGE

UNLIMITED SERIES



FEATURES

- NON PRESSED PAPER CONE WITH KEVLAR FIBRES
- HIGH ROLL RIBBED FOAM SURROUND
- QUAD BLACK POLY COTTON SPIDERS
- TRIPLE STACKED FERRITE MAGNETS
- 4" BLACK ALUMINIUM VOICE COIL
- CARBON FIBRE DUSTCAP
- HEAT RAPTOR T-YOKE HEATSINK
- 10AWG CABLE

Model	EDU12D1SPL-E1	EDU15D1SPL-E1	EDU18D1SPL-E1
Cone	Non-pressed paper cone	Non-pressed paper cone	Non-pressed paper cone
Surround	High roll foam - ribbed	High roll foam - ribbed	High roll foam - ribbed
Dustcap	Carbon Fibre	Carbon Fibre	Carbon Fibre
Voice Coil	65mm Aluminium winding	65mm Aluminium winding	65mm Aluminium winding
Spider	4pcs black PC	4pcs black PC	4pcs black PC
Gasket	Rubber	Rubber	Rubber
Top Plate	25mm Black anodized	25mm Black anodized	25mm Black anodized
Terminal / Wire	10awg cable	10awg cable	10awg cable
Impedance	Dual 1Ω	Dual 1Ω	Dual 1Ω
Peak / RMS Power	10,000 watts / 5000 watts	10,000 watts / 5000 watts	10,000 watts / 5000 watts
Magnet	254mm x 25mm 3pcs 504oz	280mm x 25mm 3pcs 612oz	280mm x 25mm 3pcs 612oz
Recommended Amplifier	EDX5000.1FD-E9	EDX5000.1FD-E9	EDX5000.1FD-E9

EDGE

SUBWOOFER TECHNICAL DATA

DB SERIES

LEVEL 1

EDB12D2LITE-EO

Fs	38.5Hz	BL	12.2Tm
Vas	42.5L	SPL	87.2dB
Re	3.9 Ohms	SD	0.047m/2
Qms	6.756	Cms	124.41
Qes	0.711	Mms	137.17g
Qts	0.643	Xmax	14mm

EDB10D2-EO

Fs	36.5Hz	BL	7.2Tm
Vas	20.3L	SPL	83.7dB
Re	3.9 Ohms	SD	0.033m/2
Qms	5.678	Cms	131.154
Qes	0.642	Mms	144.75g
Qts	0.577	Xmax	18mm

EDB12D2-EO

Fs	33Hz	BL	7.8Tm
Vas	47.86L	SPL	87.5dB
Re	3.9 Ohms	SD	0.047m/2
Qms	7.252	Cms	139.87
Qes	0.499	Mms	159.8g
Qts	0.467	Xmax	18mm

STREET SERIES

LEVEL 3

EDS8D2-E8

Fs	42.5Hz	BL	15.7Tm
Vas	4.1L	SPL	81.2dB
Re	2 Ohms	SD	0.023m/2
Qms	6.11	Cms	0.08mm/N
Qes	0.36	Mms	169g
Qts	0.34	Xmax	12.5mm

EDP122SPL-E6

Fs	37.5Hz	BL	21.98Tm
Vas	17.020mm ²	SPL	83.7dB
Re	3.6 Ohms	SD	0.047m/2
Qms	6.667	Cms	53.928uM/N
Qes	0.59	Mms	334.435g
Qts	0.539	Xmax	29mm

EDS12D2-E7

Fs	38.9Hz	BL	22.3Tm
Vas	16.2L	SPL	86.3dB
Re	3.9 Ohms	SD	0.047m/2
Qms	3.64	Cms	0.05mm/N
Qes	0.34	Mms	321.3g
Qts	0.31	Xmax	17.5mm

XTREME SERIES

LEVEL 4

EDP122-E6

Fs	49.5Hz	BL	27.22Tm
Vas	9.739mm ²	SPL	85.6dB
Re	3.6 Ohms	SD	0.047m/2
Qms	5.668	Cms	30.86uM/N
Qes	0.506	Mms	334.435g
Qts	0.464	Xmax	37.5mm

EDX12D1-E7

Fs	32.6Hz	BL	18.1Tm
Vas	22.8L	SPL	85.4dB
Re	1.7 Ohms	SD	0.047m/2
Qms	4.31	Cms	0.07mm/N
Qes	0.35	Mms	325g
Qts	0.32	Xmax	22.5mm

EDX15D1-E7

Fs	28.1Hz	BL	17.9Tm
Vas	66.3L	SPL	88dB
Re	1.7 Ohms	SD	0.075m/2
Qms	4.06	Cms	0.06mm/N
Qes	0.33	Mms	384.5g
Qts	0.33	Xmax	22.5mm

EDX18D1-E7

Fs	27.1Hz	BL	20.17Tm
Vas	136L	SPL	91dB
Re	3.8 Ohms	SD	0.116m/2
Qms	3.8	Cms	0.719mm/N
Qes	0.34	Mms	477.9g
Qts	0.321	Xmax	20mm

EDX10D2-EO

Fs	33.4Hz	BL	10.446Tm
Vas	12.318L	SPL	82.5dB
Re	1 Ohms	SD	0.033m/2
Qms	5.142	Cms	99.286uM/N
Qes	0.396	Mms	228.843g
Qts	0.368	Xmax	24mm

EDX12D2-EO

Fs	33.6Hz	BL	10.9Tm
Vas	20.565L	SPL	83.6dB
Re	1 Ohms	SD	0.047m/2
Qms	6.195	Cms	68.45uM/N
Qes	0.524	Mms	328.067g
Qts	0.483	Xmax	32.5mm

EDX15D2-EO

Fs	32.147Hz	BL	11.567Tm
Vas	66.121L	SPL	87.3dB
Re	1 Ohms	SD	0.075m/2
Qms	5.709	Cms	53.28uM/N
Qes	0.625	Mms	460g
Qts	0.563	Xmax	35mm

UNLIMITED

SERIES

LEVEL 5

EDX12D1SPL-E7

Fs	32.2Hz	BL	20.14Tm
Vas	22.09L	SPL	85.36dB
Re	1.8 Ohms	SD	0.047m/2
Qms	6.04	Cms	0.712mm/N
Qes	0.34	Mms	342.8g
Qts	0.323	Xmax	23mm

EDX18D1SPL-E7

Fs	25.71Hz	BL	23.65Tm
Vas	122.7L	SPL	89.88dB
Re	1.8 Ohms	SD	0.116m/2
Qms	5.09	Cms	0.64mm/N
Qes	0.34	Mms	590.8g
Qts	0.319	Xmax	23mm



EDGE

PRO AUDIO MIDRANGE SPEAKER

TECHNICAL DATA

DB SERIES

LEVEL 1

EDPRO6LITE

Fs	149.9Hz	BL	3.375Tm
Vas	3.04L	SPL	94dB
Re	3 Ohms	SD	0.023m/2
Qms	9.966	Cms	0.149
Qes	1.873	Mms	7.55g
Qts	1.569		



EDPRO6B-E6

Fs	166.199Hz	BL	4.41Tm
Vas	3.458L	SPL	93.4dB
Re	3.2 Ohms	SD	0.023m/2
Qms	8.695	Cms	112.067uM/N
Qes	1.406	Mms	8.183g
Qts	1.210		




EDPRO65B-E6

Fs	166.199Hz	BL	4.41Tm
Vas	3.458L	SPL	93.4dB
Re	3.2 Ohms	SD	0.023m/2
Qms	8.695	Cms	112.067uM/N
Qes	1.406	Mms	8.183g
Qts	1.210		




EDPRO6B-E9

Fs	131.879Hz	BL	4.187Tm
Vas	3.980L	SPL	91.24dB
Re	3.1 Ohms	SD	0.023m/2
Qms	7.609	Cms	195.4uM/N
Qes	1.091	Mms	7.452g
Qts	0.954		




EDPRO8B-E7

Fs	140.63Hz	BL	5.44Tm
Vas	5.35L	SPL	91.6dB
Re	3.5 Ohms	SD	0.029m/2
Qms	15.59	Cms	0.08mM/N
Qes	1.64	Mms	15.66g
Qts	1.48		



EDPRO10B-E7

Fs	84.96Hz	BL	7.03Tm
Vas	20.32L	SPL	92.7dB
Re	3.4 Ohms	SD	0.034m/2
Qms	15.00	Cms	0.12mM/N
Qes	1.06	Mms	28.9g
Qts	0.99		




DBX SERIES

LEVEL 2

EDBPRO65RX-E8

Fs	179.768Hz	BL	4.733Tm
Vas	2.52L	SPL	92.4dB
Re	3.2 Ohms	SD	0.023m/2
Qms	9.133	Cms	93.5uM/N
Qes	1.352	Mms	8.381g
Qts	1.178		



EDBPRO8RX-E9

Fs	108.424Hz	BL	4.77Tm
Vas	4.359L	SPL	99dB
Re	3.2 Ohms	SD	0.029m/2
Qms	15.260	Cms	98.8uM/N
Qes	1.625	Mms	12.73g
Qts	1.468		



EDBXPRO69W-E9

Fs	99.2Hz	BL	6.1Tm
Vas	12L	SPL	93.4dB
Re	3.2 Ohms	SD	0.029m/2
Qms	10.53	Cms	170uM/N
Qes	0.81	Mms	14.8g
Qts	0.76		



EDBXPRO5N-E9

Fs	193.7Hz	BL	4.3Tm
Vas	1.1L	SPL	89.8dB
Re	3.2 Ohms	SD	0.018m/2
Qms	6.45	Cms	111.0uM/N
Qes	1.30	Mms	6.3g
Qts	1.08		



EDBXPRO6N-E9

Fs	178Hz	BL	4.2Tm
Vas	2.7L	SPL	91.7dB
Re	3.2 Ohms	SD	0.023m/2
Qms	7.97	Cms	100uM/N
Qes	1.58	Mms	12.73g
Qts	1.32		



EDBXPRO8N-E9

Fs	106.5Hz	BL	4Tm
Vas	12.8L	SPL	92dB
Re	3.1 Ohms	SD	0.029m/2
Qms	7.72	Cms	200uM/N
Qes	1.48	Mms	11.1g
Qts	1.24		



STREET

SERIES

LEVEL 3

EDSPRO5N-E0

Fs	146.4Hz	BL	7.5Tm
Vas	1.6L	SPL	96dB
Re	3.2 Ohms	SD	0.018m/2
Qms	7.5	Cms	0.16
Qes	0.40	Mms	7.5g
Qts	0.38		



EDSPRO6N-E0

Fs	143.3Hz	BL	7.4Tm
Vas	3.3L	SPL	99dB
Re	3.2 Ohms	SD	0.023m/2
Qms	9.00	Cms	0.12
Qes	0.52	Mms	9.9g
Qts	0.49		



EDSPRO8N-E0

Fs	109.5Hz	BL	6.3Tm
Vas	16.4L	SPL	102dB
Re	3.2 Ohms	SD	0.029m/2
Qms	6.14	Cms	0.23
Qes	0.51	Mms	9.3g
Qts	0.47		



XTREME

SERIES

LEVEL 4

EDXPRO6W-E9

Fs	137.9Hz	BL	4.21Tm
Vas	4.3L	SPL	91.6dB
Re	3.1Ohms	SD	0.023m/2
Qms	5.68	Cms	170uM/N
Qes	1.18	Mms	7.7g
Qts	0.98		



EDXPRO8W-E9

Fs	117Hz	BL	4.91Tm
Vas	11.4L	SPL	93.9dB
Re	3.2 Ohms	SD	0.029m/2
Qms	7.04	Cms	160uM/N
Qes	1.14	Mms	11.6g
Qts	0.98		



EDXPRO6L-E9

Fs	137Hz	BL	5.8Tm
Vas	3.9L	SPL	93.5dB
Re	3.1 Ohms	SD	0.023m/2
Qms	5.25	Cms	0.16mM/N
Qes	0.68	Mms	8.5g
Qts	0.60		



EDXPRO8L-E9

Fs	95.8Hz	BL	7.1Tm
Vas	14.5L	SPL	95.7dB
Re	3.2 Ohms	SD	0.029m/2
Qms	5.94	Cms	200uM/N
Qes	0.53	Mms	13.7g
Qts	0.49		



EDXPRO6P-E9

Fs	139.2Hz	BL	3.9Tm
Vas	5.2L	SPL	93dB
Re	3.0 Ohms	SD	0.023m/2
Qms	5.43	Cms	210uM/N
Qes	1.08	Mms	6.2g
Qts	0.90		



EDPRO8E-E8

Fs	85.4Hz	BL	9.4Tm
Vas	13.3L	SPL	95dB
Re	3.5 Ohms	SD	0.029m/2
Qms	8.85	Cms	0.18mM/N
Qes	0.4	Mms	18.8g
Qts	0.39		




EDPRO6BP-E8

Fs	97.5Hz	BL	7.3Tm
Vas	4.4L	SPL	89.8dB
Re	3.5 Ohms	SD	0.023m/2
Qms	6.7	Cms	0.17mM/N
Qes	0.65	Mms	15.9g
Qts	0.59		



EDPRO8BP-E8

Fs	103.7Hz	BL	8.3Tm
Vas	5.7L	SPL	90.8dB
Re	3.3 Ohms	SD	0.029m/2
Qms	9.79	Cms	0.09mM/N
Qes	0.82	Mms	26.3g
Qts	0.76		





EDGE

EDGECARAUDIO.COM