

# Mitchell-Scaffold Platform for Camera / Gimbal Setups (P-MTCL-SF)

---

## Assembly Manual



### What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



Mitchell-Scaffold Adapter



Castle Nut wrench



2 X L-Type Allen Keys  
(Sizes: 4mm & 6mm)

---

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

## Mitchell-Scaffold Adapter Setup

**NOTE:** It has multiple ¼"-20 thread holes on the bottom of the adapter plate for mounting additional accessories.

- Loosen all the knobs of the Mitchell-Scaffold Adapter clamps and open the clamps.



- Mount the Mitchell-Scaffold Adapter on 48mm speed rails (Not Included) and close the clamps.



- Properly tighten the knobs of all the clamps.



- Remove all the bolts from the bottom side of the Mitchell-Scaffold Adapter with the help of an Allen Key, and remove the castle ring.



**NOTE:** The top mount is the Male Mitchell mount, although if you prefer a female Mitchell Mount, you can simply remove the castle nut and use it accordingly.




## Mounting of Fluid Head

- Remove the castle ring from the Fluid Head (**Not Included**) and mount the Fluid Head onto a tripod (**Not Included**).



- Attach the castle ring to the fluid head and properly tighten it.

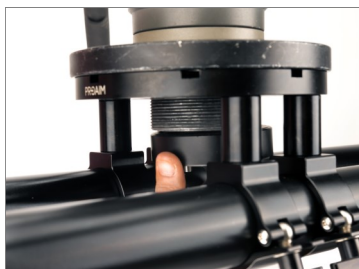

- Remove the camera plate by pressing the push pin on the fluid head.

**NOTE:** you create a spectacular clutter-free camera setup with Mitchell-based gear such as isolators, gimbals, fluid heads, and so on.



## Camera Mounting Setup

- Attach the camera plate to the Camera (**Not Included**) and properly tighten it with the help of a screwdriver (**Not Included**).



- Slide the camera onto the fluid head. Your camera setup is ready now.

**NOTE:** The adapter has an impressive payload capacity of up to 100kg/220lb, ensuring a quick, stable & strong connection with easy mounting.



**NOTE:** It is versatile filming equipment that you can use over-slung, under-slung, offset, and in many different positions, suiting your shooting requirements



## Mounting on Tripod

- Remove the castle ring from the Mitchell Scaffold Adapter.



- Mount the Mitchell-Scaffold Adapter on a tripod (**Not Included**).



- Now attach the castle ring at the bottom of the Mitchell-Scaffold Adapter and attach the castle nut wrench to the castle ring.

**NOTE:** The Mitchell castle nut wrench is used for quick and secure Mitchell mount castle nut adjustment.



- Open all the clamps of the Mitchell-Scaffold Adapter and insert the 48mm speed rail (**Not Included**).



- After inserting the speed rail, tighten all the clamps with the help of the knobs. Follow the same process to insert the second speed rail.



**NOTE:** Beneath the mount is a scaffolding side of four clamps with an OD of 48mm; also, you can use four or only two clamps suiting your setup needs.



**YOUR PROAIM MITCHELL SCAFFOLD PLATFORM FOR CAMERA  
ALL DRESSED UP AND READY TO GO!**



**(SHOWN WITH OPTIONAL ACCESSORIES)**

**Warranty:** We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

**Liability:** We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

**Contact Us:** In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.