


i-Caddie CLUB SUGGESTION SET-UP


To set up i-Caddie, you will first need to know your 7-iron distance in your preferred unit of measure (yards/meters). Based on that information, the proprietary firmware will then make club suggestions based on the distance you measure.



1. To set your 7-iron distance, start with the LZ-i laser in the OFF position. **HOLD** the **POWER** button for 10 seconds to engage i-Caddie set up mode.

In the initial "SET" interface screen, "7I" and "160" icon will be flashing

2. While in the "SET" interface, **HOLD** the **POWER** button for an additional 3 seconds to toggle to the club distance setting. Tapping the **POWER** button will add (+) 1 yard/meter, tapping the **MODE** button will (-) 1 yard/meter.

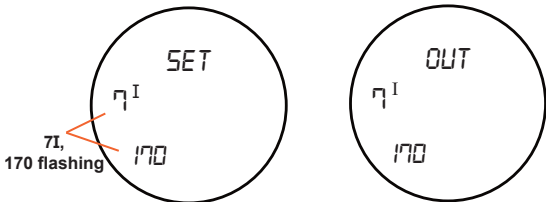

3. Once correct distance is set, **HOLD** the **POWER** button for 3 seconds to confirm. Once you see both icons flashing, tap the **POWER** button again to engage the "OUT" screen, then hold the **POWER** button an additional 3 seconds to return to the main screen.

To turn the i-Caddie club suggestion ON/OFF, simply **HOLD** the **Mode Button** for 5 seconds while on the main screen

SWAMI LZ-i LASER RANGEFINDER MANUAL




RANGEFINDER DIAGRAM

- A. Eye Piece
- B. Diopter Adjustment
- C. Power Button
- D. Mode Button
- E. Battery Door



LCD DISPLAY



- A. Zero-In Aiming Circle
- B. P.A.T. Mode Indicator
- C. Unit of Measure
- D. Battery indicator
- E. Slope Adjusted Distance
- F. Angle of Incline/Decline
- G. i-Caddie suggested club




For more support visit: WWW.IZZO.COM

HOW TO USE

1. While looking through the **Eye Piece**, **PRESS & RELEASE** the **Power Button**. The rangefinder is now powered on.
2. To focus/increase clarity, use the **Diopter Adjustment** by turning the **Eye Piece**.




3. Continue looking through the **Eye Piece**, aim the **Zero-In Aiming Circle** at your intended target & **PRESS** the **Power Button**. The laser will fire and the **Laser Indicator** will appear to the right of the **Zero-In Aiming Circle**. The measurement will be displayed at the top of the LCD display.



MEASUREMENT MODES

1. **Standard**- Standard mode is recommended when measuring distances to larger objects. (Fig. A)
2. **P.A.T TECHNOLOGY**- P.A.T. mode is best used when measuring the distance to a flagstick or smaller objects. To toggle between Standard and P.A.T mode, **PRESS** the **Mode Button** once while the device is powered on. When P.A.T. mode is activated, the flagstick icon will appear on the LCD display (Fig. B).

Caution: Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

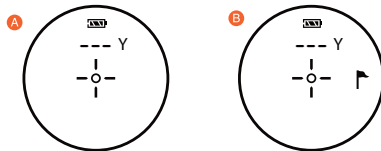

NOTE: While scanning in P.A.T. Mode, the measurement will only change when a shorter distance is measured. This is useful when measuring the distance to a flagstick when there are trees or other objects in the background.

3. **Scanning** - To measure distances to multiple targets in succession, **PRESS** and **RELEASE** **Power Button** to power on. Then **HOLD** **Power Button**, the **Laser Indicator Circle** will flash and the laser will continuously fire. Measurements will change as you scan the landscape and change targets.
4. **Unit of Measure**- To change the unit of measure from yards to meters, start with the device powered on. Then **HOLD** the **Mode Button** for 10 sec. The unit of measure is indicated by a "Y" or "M" shown directly to the right of the distance displayed.

SLOPE FUNCTION

The **Slope Light** on the side of the LZ-i has two positions:

1. **GREEN** is showing: **Slope function is enabled**. Slope adjusted yardage will be displayed after every time the laser is fired. The laser is not tournament legal when the slope is enabled.
2. **RED** is showing: **Slope function is off**. The laser is tournament legal when the slope is turned off.



To turn slope ON/OFF, simply **HOLD** the **Mode Button** for 3 seconds while on the main screen