



BWML-2712H

27" FullHD Monitor for 24/7 video surveillance
HDMI / VGA / BNC for AHD/CVI/TVI /CVBS

PRODUCT DESCRIPTION

► Application:

The new monitors of the SML series have a timeless design and are equipped with professional technology

► Technical specifications:

Type	Lcd monitor
Screen diagonal	27" (68,5cm)
Video signal	PAL, NTSC
Resolution pixel	1920x1080
Pixel dot pitch (mm)	0.311(H) x 0.311(V)
Picture format	16:9
Colours	16.7M
Brightness (cd/m2)	250
Contrast ratio	1000:1
Refresh rate (ms)	5
Visible area (H/V) mm	476.64(H) x 268.11(V)
View angle R/L and U/D in °	88/88 - 75/75
Operating Frequency	30-85 KHz(H) / 50-75Hz(V)
Background lighting	LED
Video inputs	1x BNC (CVI/TVI/AHD), 1x BNC-CVBS (analogue)
Video outputs	1x BNC (CVI/TVI/AHD), 1x BNC-CVBS (analogue)
PC video input	VGA, HDMI
Audio inputs	2x 3.5 mm (phone jack) (BNC-IN/PC-IN)
Speakers	2x 3W
OSD menu languages	Multi language

BURG-GUARD GmbH
Wormgermühle, 58540 Meinerzhagen, Germany
Tel.: +49 2358 905 490, Fax: +49 2358 905 499
BURG-GUARD@burg.biz, www.burg-guard.com




► Technical specifications:

Control OSD	Buttons on front
Classification	IP-40
Installation option	VESA / MIS-D 100x100
Housing colour	Black
Housing material	Plastic
Voltage	12 V DC using external power supply 230VAC/2A
Max. Power consumption (watt)	20
Operating temperature (°C)	-10 to +50
Storage temperature (°C)	0 to +40
Rel. humidity (%)	20 - 70, non-condensing
24/7 operation	Yes
Dimensions WxHxD (mm)	62,4 x 37,5 x 5,2 cm (without mounting)
Dimensions mounting stand	62,4 x 44,2 x 193 cm
WxHxD (mm)	
Weight	5,5 Kg
Identifier	CE
Items included in delivery	Power supply 12VDC, remote control
Specials	Supports AHD/CVI/TVI and CVBS(FBAS)

► Note:

1x BNC für AHD/CVI/TVI max. 2MP 25fps 1x BNC für FBAS/CVBS max. 960h 25fps

► Weitere Bilder:

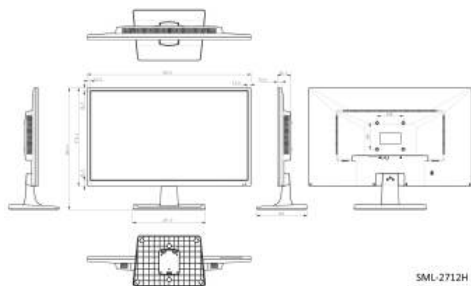

► Recommended Accessories

VA-3240	LCD-Monitor wall mount black/silver up to 24", max. wall dist. 537mm, max. load 32 kg
VA-VESA-172	VESA wall mount for LCD-monitors 7,5x7,5 to 20x20cm, Walldist. 11cm
HDMI-700-E	HDMI Extender Transmission via UTP up to 60m

BURG-GUARD GmbH
 Wormgermühle, 58540 Meinerzhagen, Germany
 Tel.: +49 2358 905 490, Fax: +49 2358 905 499
 BURG-GUARD@burg.biz, www.burg-guard.com



Our products undergo constant development. Please refer to the price list for our most up-to-date product program. Errors and omissions excluded. No responsibility accepted for accuracy of images.