



### IPC7622ER-X44-VF

2MP 44X Positioning system  
400m IR, Alarm 7xIn/2xOut, Audio 1/1, IP67

## PRODUCT DESCRIPTION

#### ► Application:

2MP 44X Lighthunter Intelligent Network Positioning system ?High quality image with 2MP,1/2.8?? CMOS sensor ?1920\*1080@60fps in the main stream ?Triple streams ?44X Optical Zoom ?Support Optical defog, Self-adaptive defog ?Smart IR, up to 400m (1312ft) IR distance ?Rain-sensing auto wiper ?Power supply: DC  $\pm 48V \pm 25\%$ , DC  $24V \pm 15\%$ (DC20V~DC60V), AC  $24V \pm 25\%$  ?Alarm 7 in and 2 out, Audio 1 in and 1 out ?IP67 ingress protection

#### ► Technical specifications:


|                                 |                                |
|---------------------------------|--------------------------------|
| Type                            | Positioning System             |
| Decoding / Video / Lens         | >>>>>DECODING/VIDEO/LENS<<<<<< |
| Sensor type                     | 1/2.8" Progressive scan CMOS   |
| LightHunter                     | Yes                            |
| Max. Picture resolution (pixel) | 2 MP (1920x1080)               |
| Video codec                     | (U-)H.265,(U-) H.264, MJPEG    |
| Streaming Method                | Unicast / Multicast            |
| Max. frame rate (fps)           | 60fps at 2MP                   |
| Max frame rate 1.sub stream     | 60 fps at 2MP                  |
| Max frame rate 2.sub stream     | 60 fps at D1                   |
| Bit Rate Control                | CBR / VBR                      |
| Bit Rate per channel            | H.265/H.265: 128-16384Kbps     |
| Number of video streams         | 3 (individually adjustable)    |
| Lens mount                      | Intern                         |
| Lens type                       | Built-in motorized lens        |
| Focal length                    | 5-220                          |
| Aperture (max)                  | F1.2                           |

BURG-GUARD GmbH  
Wormgermühle, 58540 Meinerzhagen, Germany  
Tel.: +49 2358 905 490, Fax: +49 2358 905 499  
BURG-GUARD@burg.biz, www.burg-guard.com







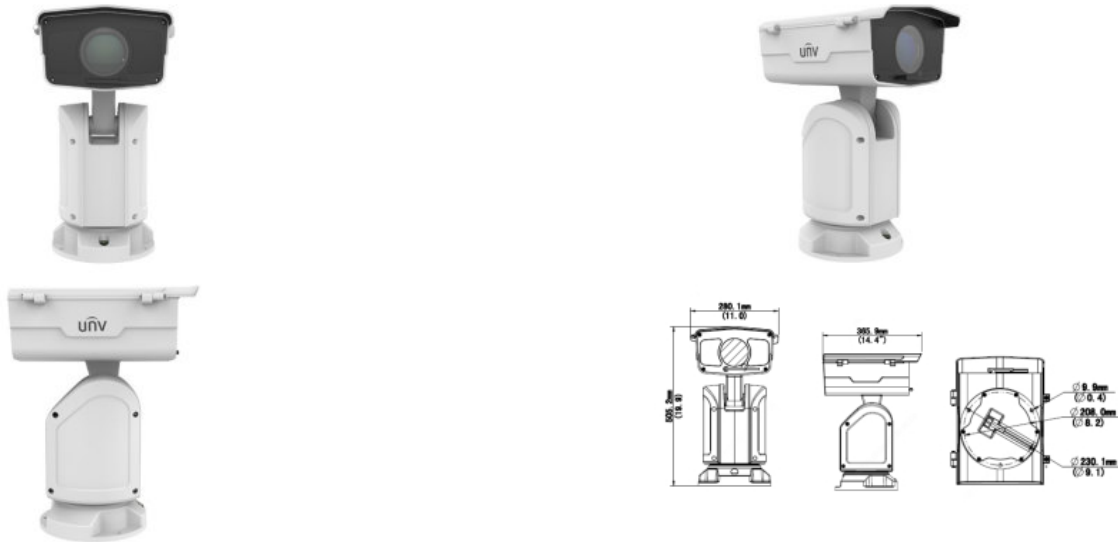

### ► Recommended Accessories

|              |   |
|--------------|---|
| TR-WM04-IN   | Uniview Wall mounting indoor f. IPC323X Serie                       |
| TR-SM04-IN   | Uniview adaptor plate indoor, suitable for IPC323 dome series       |
| TR-UF45-E-IN | Uniview Fixed Dome adaptor plate, Indoor, Ceiling and wall mounting |
| TR-JB04-C-IN | Uniview Dome junction box Wall installation                         |