

Installation instructions wall safes




Dear customer:

Karat wall safes offer flexibility with regard to the depth of installation in your wall. In the table below the values for min/max refer to the lowest and greatest recommended installation depths. Please use the recommended sand/gravel, water and cement quantities in-line with the wall safe you are installing.

Using the suggested mix quantities and following the tips below, Portland limestone cement CEM II/A-LL 42,5R DIN1164 will render cement of the required quality.

Instructions:

- Please follow the mixing ratios strictly;
- The cement must have the consistency of a firm batter and should fall from the trowel in similar fashion;
- Close all orifices of the safe with adhesive tape;
- Insert the safe into the opening and wedge it in ensuring it is level (using a spirit level);
- Fill in the cement and compact it (for example using a stick) in order to fill all crevices and avoid air bubbles;
- Make sure that no cavities are left unfilled.
- After two days open the door and wipe off any remaining humidity; leave the safe open for one day to allow all cavities to dry out.

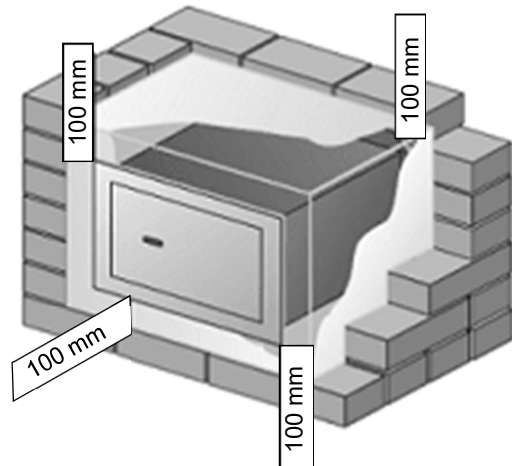

Installation note:

Confirmation for the insurance company:

This wall safe _____ was installed by

Mr. / Ms.: _____

Street / Town: _____

according to the Installation Instructions. Signatory confirms adherence to producer's guidelines.

Important note: After a break-in or attempted break-in, after fires and tampering with construction and/or function the wall safe loses its insurance recognition as stated on the inside of the safe's body. In such a case please contact Burg-Wächter's serviceline: (+49) 2358 / 965 366

Place / Date: _____

Signature: _____

Indication of quantities of cement ingredients if the safe is installed in line with instructions above:

Safety cabinet	Security Level	Dry gravel or sand 0-8mm or 0-16mm	Portland Limestone cement CEM II/A-LL 42,5R DIN1164	Water
Modell/ Body depth		Dosage		
		8	2	1
		[kg]	[kg]	[l]
Karat				
WT 613 min / max	B	99 / 130	25 / 33	13 / 16
Karat				
WT 614 min / max	N	132 / 169	33 / 43	16 / 21
WT 616 min / max	N	149 / 190	37 / 47	19 / 24
Diplomat				
WTD 710 5 350	I	220	54	27
WTD 710 6 350	I	270	68	34
WTD 710 6 580	I	408	102	51
WTD 710 8 350	I	340	84	42
WTD 710 8 580	I	528	132	66