



POLYPROPYLENE SEDIMENT CARTRIDGES




Features & Benefits

- Three-layers structure cartridge, high contaminant holding capacity, long filter service life.
- 100%PP for compatibility with a wide range of process fluids.
- Micro-Denier melt-blown filtration fiber, high removal ratings.
- Formed by thermal bond without use of any binders and adhesives.
- Certified by NSF42 and FDA CFR Title 21.



Schematic diagram

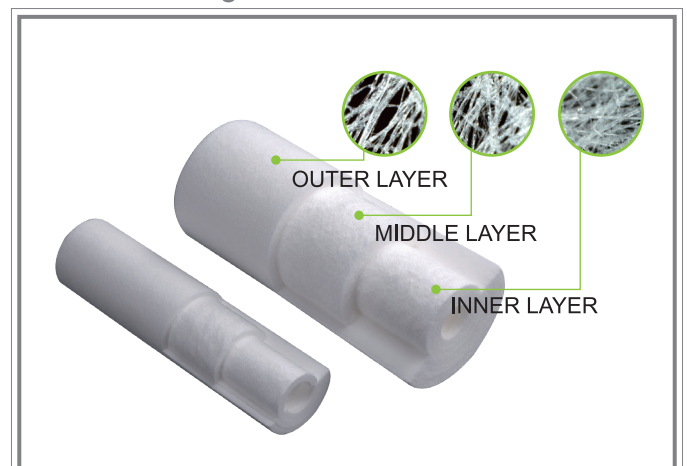

Specifications

Model No.	FPP-LL-WX-ZZZ
Micron Ratings	1, 3, 5, 10, 25, 50, 75, 100 Micron
Material of Construction	100% melt-blown micron-denier PP fiber
Length	9.87", 10", 20", 30", 40" (251mm, 254mm, 508mm, 762mm, 1016mm)
Inner Diameter	28mm
Outer Diameter	63mm, 110mm