


CNOS-TYPE T IN STEEL

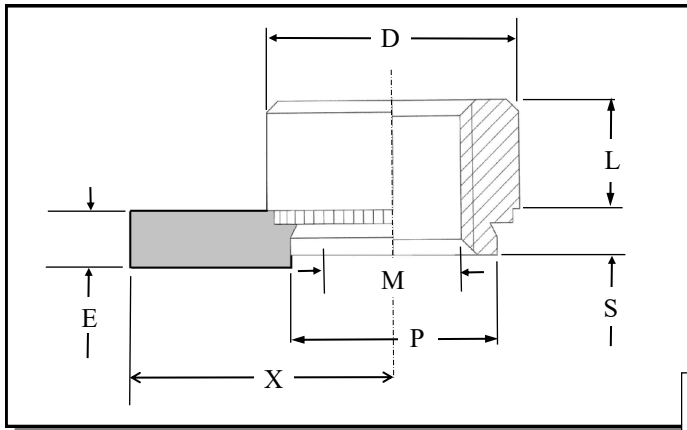

Captive nut open in steel for thin sheet material

All dimensions in mm
Material :- Steel 11 MnPb37
Finish :- Zinc B/Fe Cr3

R.T.S. SALES LINE
01296 330331

THREAD SIZE "M"	HOLE SIZE "P" -0.0 +0.10	BODY "D"	"S"	LENGTH "L"	MINIMUM MATERIAL "E"	MINIMUM DISTANCE "X"	PART NUMBER
M2.5 x 0.45	4.25	6.30	0.97	1.50	1.00	5.00	CNOS-M25-T1
			1.37		1.40		CNOS-M25-T2
M3 x 0.50	4.25	6.30	0.97	1.50	1.00	5.00	CNOS-M3-T1
			1.37		1.40		CNOS-M3-T2
M4 x 0.70	5.40	7.90	0.97	2.00	1.00	7.00	CNOS-M4-T1
			1.37		1.40		CNOS-M4-T2
M5 x 0.80	6.40	8.70	0.97	2.00	1.00	7.00	CNOS-M5-T1
			1.37		1.40		CNOS-M5-T2
M6 x 1.00	8.75	11.10	1.37	4.00	1.40	9.00	CNOS-M6-T1
			2.20		2.30		CNOS-M6-T2
M8 x 1.25	10.50	12.70	1.37	5.50	1.40	10.00	CNOS-M8-T1
			2.20		2.30		CNOS-M8-T2
M10 x 1.75	14.00	17.40	2.21	7.50	2.30	13.50	CNOS-M10-T1
			3.05		3.20		CNOS-M10-T2
M12 x 2.0	17.00	20.60	3.10	8.50	3.20	16.00	CNOS-M12-T1
			6.00		6.10		CNOS-M12-T2

For additional information and technical support please contact R.T.S. technical sales department . R.T.S. reserve the right to change specifications at any time . Information given is for guidance only and should not be used for specific design criteria without reference to our application engineers.