


C SPLIT INSERT, FLAT COLLAR

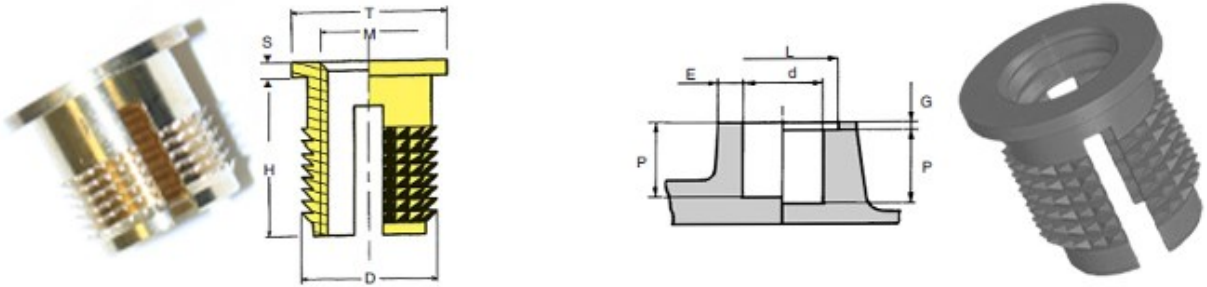

Insertion by expansion Self-break effect SERPLAST with collar – C

All dimensions in mm
Material :- BRASS

| THREAD SIZE | LENGTH | | | | | | | | | PART NUMBER |
|-------------|--------|-----|----|-----|------|--------|--------|--------|-----|-------------|
| M | H | D | T | S | d | P mini | E mini | L mini | G | |
| M2.5 | 6.5 | 4.5 | 6 | 0.5 | 4 | 7 | 2 | 6.2 | 0.5 | 40/C025H060 |
| M3 | 6.5 | 4.5 | 6 | 0.5 | 4 | 7 | 2 | 6.2 | 0.5 | 40/C030H065 |
| M3.5 | 8 | 5.5 | 7 | 0.5 | 5 | 8.8 | 2.5 | 7.2 | 0.5 | 40/C035H080 |
| M4 | 8 | 6 | 7 | 0.8 | 5.5 | 8.8 | 2.8 | 7.2 | 0.8 | 40/C040H080 |
| M5 | 8 | 7 | 8 | 0.8 | 6.5 | 8.8 | 3.3 | 8.2 | 0.8 | 40/C050H080 |
| M6 | 9.5 | 8.5 | 10 | 0.8 | 8 | 10 | 4 | 10.2 | 0.8 | 40/C060H095 |
| M8 | 10 | 10 | 12 | 1 | 9.5 | 10.3 | 4.8 | 12.2 | 1 | 40/C080H100 |
| M10 | 13 | 12 | 14 | 1 | 11.5 | 14 | 5.8 | 14.2 | 1 | 40/C100H130 |

R.T.S. SALES LINE
01296 330331



For additional information and technical support please contact R.T.S. technical sales department . R.T.S. reserve the right to change specifications at any time . Information given is for guidance only and should not be used for specific design criteria without reference to our application engineers.