


DCC INSERT, DOUBLE STRIPE WITH COLLAR

TECHNICAL DATA SHEET

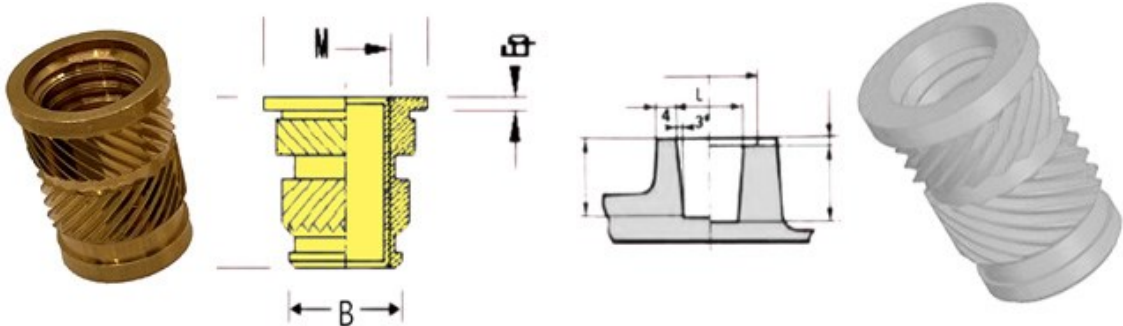

Insertion by THERMIC or
ULTRASONIC process Double
Stripe with Collar – DCC

All dimensions in mm
Material :- BRASS

THREAD SIZE M	LENGTH H	A	B	L	Ep	PART NUMBER
M2	3.53	4.8	3.1	3.2	0.53	40/DCC020H030
M2	4.53	4.8	3.1	3.2	0.53	40/DCC020H040
M2.5	4.61	5.5	3.9	4	0.61	40/DCC025H040
M2.5	6.31	5.5	3.9	4	0.61	40/DCC025H057
M3	4.61	5.5	3.9	4	0.61	40/DCC030H040
M3	5.41	5.5	3.9	4	0.61	40/DCC030H048
M3	6.31	5.5	3.9	4	0.61	40/DCC030H057
M3.5	5.76	6.4	4.7	4.8	0.76	40/DCC035H050
M3.5	7.86	6.4	4.7	4.8	0.76	40/DCC035H071
M4	4.91	7.1	5.5	5.6	0.91	40/DCC040H040
M4	5.71	7.1	5.5	5.6	0.91	40/DCC040H048
M4	6.71	7.1	5.5	5.6	0.91	40/DCC040H058
M4	9.11	7.1	5.5	5.6	0.91	40/DCC040H082
M5	6.89	7.9	6.3	6.4	1.09	40/DCC050H058
M5	10.59	7.9	6.3	6.4	1.09	40/DCC050H095
M6	8.15	9.5	7.9	8	1.35	40/DCC060H068
M6	10.85	9.5	7.9	8	1.35	40/DCC060H095
M6	14.05	9.5	7.9	8	1.35	40/DCC060H127
M8	14.05	11.1	9.5	9.6	1.35	40/DCC080H127

R.T.S. SALES LINE
01296 330331



For additional information and technical support please contact R.T.S. technical sales department . R.T.S. reserve the right to change specifications at any time . Information given is for guidance only and should not be used for specific design criteria without reference to our application engineers.