


**DC INSERT, DOUBLE STRIPE**

**TECHNICAL DATA SHEET**

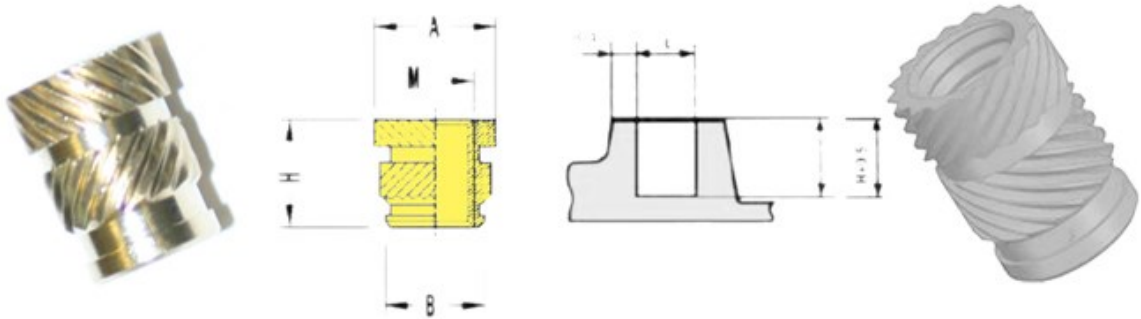

Insertion by: THERMIC or  
 ULTRASONIC process Double  
 Stripe – DC

All dimensions in mm  
 Material :- BRASS

THREAD SIZE M	LENGTH H	A	B	L	PART NUMBER
M2	3	3.6	3.1	3.2	40/DC020H034
M2	4	3.6	3.1	3.2	40/DC020H040
M2.5	4	4.6	3.9	4	40/DC025H040
M2.5	5.7	4.6	3.9	4	40/DC025H057
M3	4	4.6	3.9	4	40/DC030H040
M3	4.8	4.6	3.9	4	40/DC030H048
M3	5.7	4.6	3.9	4	40/DC030H057
M3.5	5	5.4	4.7	4.8	40/DC035H050
M3.5	7.1	5.4	4.7	4.8	40/DC035H071
M4	4	6.3	5.5	5.6	40/DC040H040
M4	4.8	6.3	5.5	5.6	40/DC040H048
M4	5.8	6.3	5.5	5.6	40/DC040H058
M4	8.2	6.3	5.5	5.6	40/DC040H082
M5	5.8	7.1	6.3	6.4	40/DC050H058
M5	9.5	7.1	6.3	6.4	40/DC050H095
M6	6.8	8.7	7.9	8	40/DC060H068
M6	9.5	8.7	7.9	8	40/DC060H095
M6	12.7	8.7	7.9	8	40/DC060H127
M8	12.7	10.2	9.5	9.6	40/DC080H127

**R.T.S. SALES LINE**  
**01296 330331**



For additional information and technical support please contact R.T.S. technical sales department . R.T.S. reserve the right to change specifications at any time . Information given is for guidance only and should not be used for specific design criteria without reference to our application engineers.