
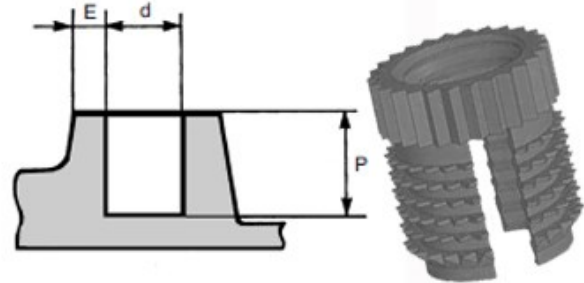


## TR SPLIT INSERT

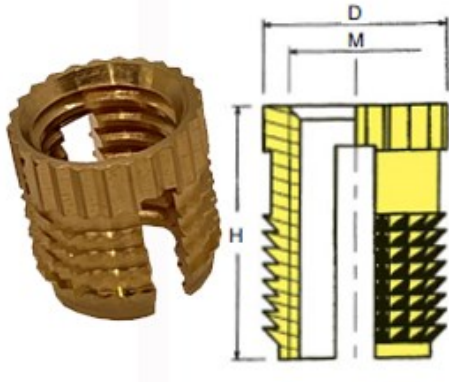

Insertion by expansion Self  
break-effect : TR

All dimensions in mm  
Material :- BRASS

THREAD SIZE M	LENGTH H	EXTERNAL Ø D	Ø C	HOLE Ø d	HOLE DEPTH P (0.1/0)	E	PART NUMBER
M2	4	4	3.4	3.5	5.5	1.8	40/TR020H040
M2.5	4	4.5	3.9	4	5.5	2	40/TR025H040
M2.5	6.5	4.5	3.9	4	8	2	40/TR025H065
M3	5	4.5	3.9	4	6.5	2	40/TR030H050
M3	6.5	4.5	3.9	4	8	2	40/TR030H065
M3.5	5	5.5	4.9	5	6.8	2.5	40/TR035H050
M3.5	8	5.5	4.9	5	9.8	2.5	40/TR035H080
M4	8	6	4.9	5.5	9.8	2.8	40/TR040H080
M4	9.5	6	4.9	5.5	11.3	2.8	40/TR040H095
M5	9.5	7	5.9	6.5	11.3	3.3	40/TR050H095
M5	11	7	5.9	6.5	13	3.3	40/TR050H110
M6	9.5	8.5	7	8	11.3	4	40/TR060H095
M6	12.5	8.5	7	8	14.5	4	40/TR060H125
M8	10	10	9	9.5	12	4.8	40/TR080H100
M10	13	12	11	11.5	15	5.8	40/TR100H130

**R.T.S. SALES LINE**  
**01296 330331**



For additional information and technical support please contact R.T.S. technical sales department . R.T.S. reserve the right to change specifications at any time . Information given is for guidance only and should not be used for specific design criteria without reference to our application engineers.