


TS SYMETRIC INSERT

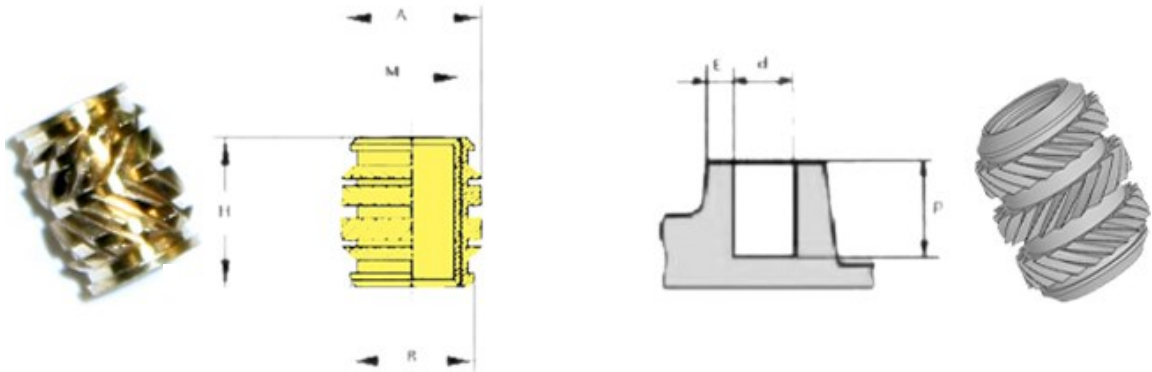

Insertion by THERMIC or
ULTRASONIC process
Symmetrical SERPLAST – TS

All dimensions in mm
Material :- BRASS

THREAD SIZE M	LENGTH H	A	B	d	PART NUMBER
M2	3	3.5	3.1	3.2	40/TS020H030
M2	3.9	3.5	3.1	3.2	40/TS020H039
M2.5	4	4.4	3.9	4	40/TS025H040
M2.5	5.7	4.4	3.9	4	40/TS025H057
M3	4	4.4	3.9	4	40/TS030H040
M3	4.8	4.4	3.9	4	40/TS030H048
M3	5.7	4.4	3.9	4	40/TS030H057
M3.5	5	5.2	4.7	4.8	40/TS035H050
M3.5	7.1	5.2	4.7	4.8	40/TS035H071
M4	4	6.1	5.5	5.6	40/TS040H040
M4	4.8	6.1	5.5	5.6	40/TS040H048
M4	5.8	6.1	5.5	5.6	40/TS040H058
M4	8.1	6.1	5.5	5.6	40/TS040H081
M5	5.8	6.8	6.3	6.4	40/TS050H058
M5	9.5	6.8	6.3	6.4	40/TS050H095
M6	6.8	8.5	7.9	8	40/TS060H068
M6	9.5	8.5	7.9	8	40/TS060H095
M6	12.7	8.5	7.9	8	40/TS060H127
M8	12.7	10	9.5	9.6	40/TS080H127

**R.T.S. SALES LINE
01296 330331**



For additional information and technical support please contact R.T.S. technical sales department . R.T.S. reserve the right to change specifications at any time . Information given is for guidance only and should not be used for specific design criteria without reference to our application engineers.