

# Excel Enbeam FTTH Outlet Loaded with 2x SC/APC OS1/OS2 Simplex Adaptors

Item Code: 200-447

**excel**  
without compromise.

Buy Now From

**Cable Intelligence**



✕ Hinged splice tray holds up to 4 heatshrink splice protectors

✕ Multiple cable entry points

✕ Fixing hardware included

✕ For use with flangeless adaptors

✕ Accepts LC duplex or SC simplex adaptors

✕ 2x 40mm splice protectors supplied as standard

## Product Overview

The Excel Enbeam FTTH Surface Mount Box has been designed for applications such as Fibre to the home or Fibre to the Desk.

## Product Specifications

| Feature                         | Values         |
|---------------------------------|----------------|
| Surface mounted                 | Yes            |
| Type of connector               | SC/APC simplex |
| With couplers                   | Yes            |
| Suitable for number of couplers | 2              |
| Suitable for type of fibre      | Single mode    |
| Width                           | 82.5 mm        |
| Height                          | 105 mm         |
| Depth                           | 25.5 mm        |

# Excel Enbeam FTTH Outlet Loaded with 2x SC/APC OS1/OS2 Simplex Adaptors

Item Code: 200-447




## Additional specifications

| Features              | Values        |
|-----------------------|---------------|
| Capacity for 2 port   | 4 Fibres      |
| Capacity for 4 port   | 8 Fibres      |
| Material              | ABS Plastic   |
| Colour                | White         |
| Weight                | 83 grams      |
| Operating Temperature | -20 to +85 °C |

## Included accessories

| Accessories       | 2-port | 4-port |
|-------------------|--------|--------|
| Splice Protectors | 2      | 4      |
| Wall fixings      | 1 set  | 1 set  |

## Product drawing

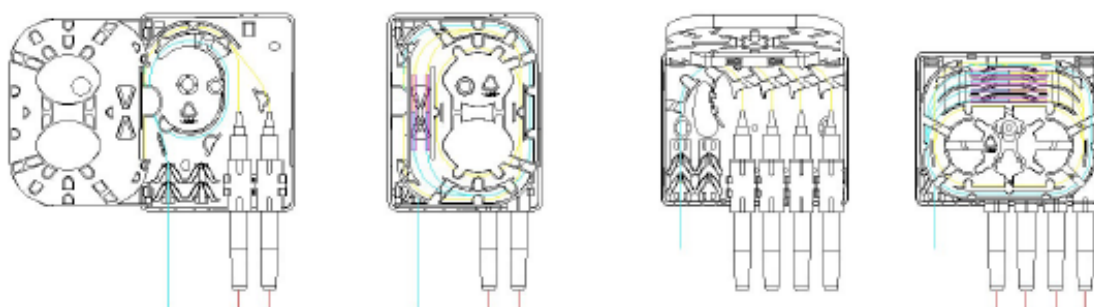

## Standards

| Applicable standard  | Detail   |
|----------------------|--|
| IEC 61754-1:2013     | Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance |
| ISO/IEC 11801-1:2017 | Information technology - Generic cabling for customer premises: Part 1 General Requirements                                  |

# Excel Enbeam FTTH Outlet Loaded with 2x SC/APC OS1/OS2 Simplex Adaptors

Item Code: 200-447



EN 50173-1:2018

Information technology. Generic cabling systems - General requirements

UL-94-V-0

Burning stops within 10 seconds after two applications of ten seconds each of a flame to a test bar. NO flaming drips are allowed.

RoHS

Compliant to the Restriction of Hazardous Substances

WFD

Compliant to Waste Framework Directive

SCIP

Compliant - Does Not Contain Substances of Concern in Products

## Part Number Table

| Part Number | Description   |
|-------------|---|
| 200-446     | Excel Enbeam FTTH Outlet up to 4 Fibres (Unloaded)                      |
| 200-447     | Excel Enbeam FTTH Outlet Loaded with 2x SC/APC OS1/OS2 Simplex Adaptors |
| 200-448     | Excel Enbeam FTTH Outlet up to 8 Fibres (Unloaded)                      |
| 200-449     | Excel Enbeam FTTH Outlet Loaded with 4x SC/APC Simplex Adaptors         |

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at [sales@cableintelligence.co.uk](mailto:sales@cableintelligence.co.uk)



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.