

# Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 10 m

Item Code: 207-210-10

**excel**  
without compromise.



Buy Now From

**Cable Intelligence**

✕ Suitable for internal use only

✕ G.657.A2

✕ Pre-Terminated SC/APC ferrules

✕ LSZH

✕ Euro class Cca-s1,d1,a1

✕ Other lengths available on request

## Product Overview

The Excel Encasa pre-terminated ferrule only drop cables have been designed for speed and ease of installation aimed at the FTTH and multi dwelling market.

The cable consists of a single core 900 µm tight buffer single mode G.657.A2 fibre surrounded by aramid yarn as a strength member covered with a white LSZH outer sheath available in LCA and SCA.

This unique design allows cables to be pushed down short runs of micro duct or installed onto tray work with the ferrule already terminated to the cable allowing smaller holes to be drilled through walls and cable to be passed through smaller enclosure entry ports.

The final termination is then a simple housing that is clicked into position removing the need for fusion splicing.

## Product Specifications

Feature	Values
Number of Cores	1
Type of tube	Tight
Fibre type	Single mode 9/125
Category	OS2
Armouring	no
Rodent resistant	no
Outer sheath colour	White
Reaction-to-fire class according to EN 13501-6	Cca
Smoke development class according to EN 13501-6	s1b
Euro class flaming droplets/particles according to EN	d1

# Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 10 m

Item Code: 207-210-10



13501-6

Euro class acidity according to EN 13501-6

a1

Halogen free (acc. EN 60754-1/2)

yes

Flame retardant

In accordance with EN 50399

Low smoke (acc. BS EN 61034-2)

yes

Outer diameter approx.

3 mm


RAL-number

9010

## Additional specifications

Features	Values
Attenuation	@1310nm (dB/KM) ≤0.4
	@1550nm (dB/KM) ≤0.3
Strength member	Aramid yarn
Fibre color	Blue
Tight buffer material	LSZH
Tight buffer diameter (mm)	0.85 ± 0.05
Outer jacket colour	White
Outer jacket material	LSZH
Outer jacket thickness (mm)	0.45 ± 0.05
Short term tensile strength	500 N
Minimum breaking tension	1200 N
Cable diameter	3 mm
Operating temperature	-20 to +65 °C

### Product drawings

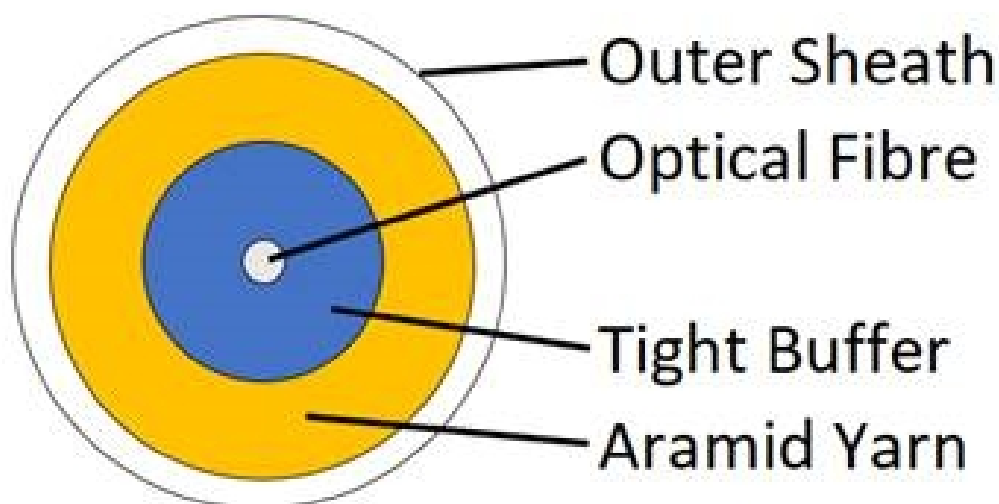

### Standards

Applicable standard	Detail
IEC 60332-1-2:2004	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
IEC 60754-2:2014+A1:2020	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity
IEC 61034-2:2005+A2:2020	Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements
IEC 60793-1-1:2017	Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance
IEC 60793-1-20:2014	Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry
IEC 60793-1-21:2001	Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry
IEC 60793-1-22:2001	Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement
IEC 60793-1-30:2010	Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test

# Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 10 m

Item Code: 207-210-10



ITU G.652.D	Characteristics of a single-mode optical fibre and cable
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50575: 2014 + A1: 2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
ANSI/TIA 568-3.D	Optical Fiber Cabling and Components Standard
ANSI/TIA/EIA 598-D	Optical Fibre Cable Colour Coding
RoHS	Compliant to the Restriction of Hazardous Substances
WFD	Compliant to Waste Framework Directive
SCIP	Compliant - Does Not Contain Substances of Concern in Products

## Part Number Table

Part Number	Description
207-210-05	Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 5 m
207-210-10	Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 10 m
207-210-15	Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 15 m
207-210-20	Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 20 m
207-210-25	Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 25 m
207-210-30	Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 25 m
207-210-35	Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 25 m
207-210-40	Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 40 m
207-210-45	Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule

# Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 10 m

Item Code: 207-210-10



Both Ends 45 m

207-210-50 Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 50 m

207-210-55 Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 55 m

207-210-60 Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 60 m

207-210-65 Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 65 m

207-210-70 Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 70 m

207-210-75 Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 75 m

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at [websales@cableintelligence.co.uk](mailto:websales@cableintelligence.co.uk)



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.