

55" Superslim Freestanding Double-Sided Digital Poster modulare

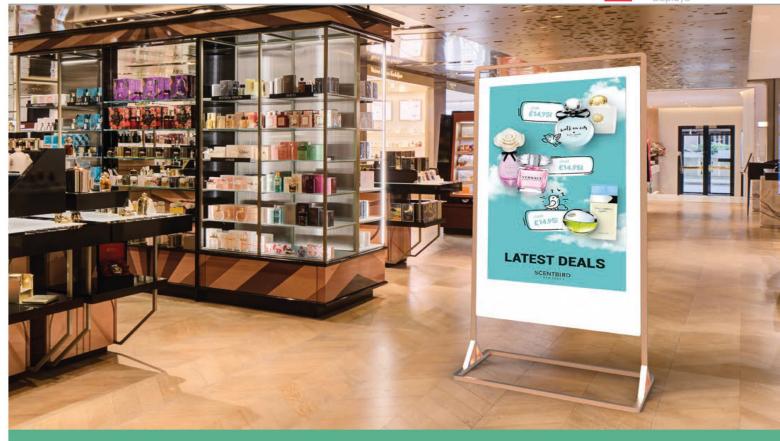

Dual-sided advertising displays with incredibly slim depth and striking brushed gold frame

Incredibly Thin Dual-Sided Display

The overall depth of this display is just 25mm; thinner than most single-sided displays. Not only does the exceptionally slim design attract more attention, but it also maximises manoeuvrability.

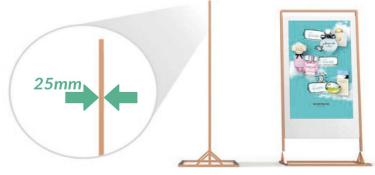

Stylish Elegant Frame

With a minimalistic framework design and high-end brushed gold finish, this unique display exudes luxury and is sure to grab attention in any location.





Lightweight Design



Integrated Android Media Player



Premium Brushed Gold Finish



Ultra-Resistant to Blackening Defect



IPS Panel



High Brightness Display (700cd/m²)



Easy USB Updates



Network Upgrade Available



24/7 Commercial Grade



Display Different Content Each Side

The special Android media player can output two separate signals simultaneously. This means that with the networked version of this product, you can display different content on each screen at the same time.



Integrated Android Media Player

The built in Android media player inside the screen allows you to upgrade to a network version without needing any additional hardware. You can also install third party Android apps if required.





High Brightness Displays (700cd/m²)

Both sides feature commercial grade high brightness IPS panels for accurately displaying image quality and colour depth with no fall-off in colour accuracy. These panels are designed to achieve ultimate lifelike colour temperature in portrait orientation.

Outward Facing 700 cd/m²





Inward Facing 700 cd/m²

Easy USB Updates

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick, insert into the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.



Lightweight Design

Thanks to the segmented tubular design, this freestanding digital poster can be easily moved into position, making it fully portable.



24/7 Commercial Grade

This is a true commercial grade solution. Built using high quality LCD panels and components, this solution is designed to be in constant use in public spaces.



IPS Panel

Commercial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy. These panels are designed to achieve ultimate lifelike colour temperature and have a wide viewing angle.



Optional Network Upgrade

For a small charge you can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi, LAN or 4G, then remotely update it over the internet.











LIGHTWEIGHT DESIGN



LED BACKLIGHT



INTEGRATED SPEAKERS







PLUG AND PLAY





















		55 Inch
	Resolution	1920×1080
	Display Areas (mm)	1209.6×680.4
	Aspect Ratio	16:9
	Side A Brightness (cd/m²)	700
Panel	Side B Brightness (cd/m²)	700
	Colour	16.7M
	Viewing Angle	178°
	Contrast Ratio	1200:1
Audio	Speaker Type	2W, 8Ω (x2)
	Video	HDMI, VGA
AV Inputs	Audio	Audio Socket (3.5mm)
	Power Consumption (W)	220
Power	Input Voltage	AC100~230V (50Hz~60Hz)
	Unit Size (WxHxD mm)	1940x867.2x25
	Package Size (WxHxD mm)	TBC
Mechanical	Footprint (WxH mm)	867.2x600
	Net Weight (kg)	33.05
	Gross Weight (kg)	42.95
	Operating Temperature	0 °C to 40 °C
~ ~	Storage Temperature	-20°C to 60°C
Environmental	Operating Humidity	0% to 90%
	Storage Humidity	0% to 95%
	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)
	Media Resolution	1920x1080/1080x1920
	CPU	Quad-Core ARM Cortex A17, 1.6GHz
	GPU	Quad-Core ARM Mali-T764
	RAM	DDR3 2GB
-	Internal Storage	8GB eMMC
Computer	USB	1 x USB (OTG/HOST), 4 x USB (HOST)
	LAN	100M/1000M Ethernet (Network Version Only)
	Wi-Fi	802.11b/g/n/ac (Network Version Only)
	Bluetooth	Bluetooth 4.0
	OS	Android 7.1
	Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1
	Included	Scheduling Software, Remote Control, User Manual
Accessories	Optional	Network Upgrade
	Warranty Period	3 Year Warranty
Warranty	Technical Support	Lifetime

Errors and omissions excepted



