


Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos on a USB stick, insert in the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.



Remarkable 4K Display

With four times the resolution of Full HD, get amazing picture quality for a truly immersive viewing experience when using HDMI.



450cd/m² Commercial Panel

A commercial grade panel and compents are used to ensure reliable 24/7 use in public spaces. The screen can also be used in landscape or portrait orientation.



Multiple Inputs

Should you need to use the screen as a monitor you can connect it to an external source, like a PC or media player, using the HDMI input and 5mm audio out jack inputs.





Integrated Android Media Player

There is an integrated Android media player inside the screen allowing you to upgrade to a network version without needing any additional hardware. You can also install third party Android apps if required.



Slim Bezel

The screens feature an extremely sleek and narrow bezel meaning that the enclosure to display area ratio is very low. The front is crafted from segmented aluminium to achieve ultimate precession while the polymer rear keeps the display super slim and lightweight.



Optional OPS Windows PC

For ultimate flexibility an OPS Windows PC can be installed into the rear of the display, allowing you to install software for either Android or Windows operating systems.




Optional Network Upgrade

For a small charge you can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi or LAN, then remotely update it over the internet.





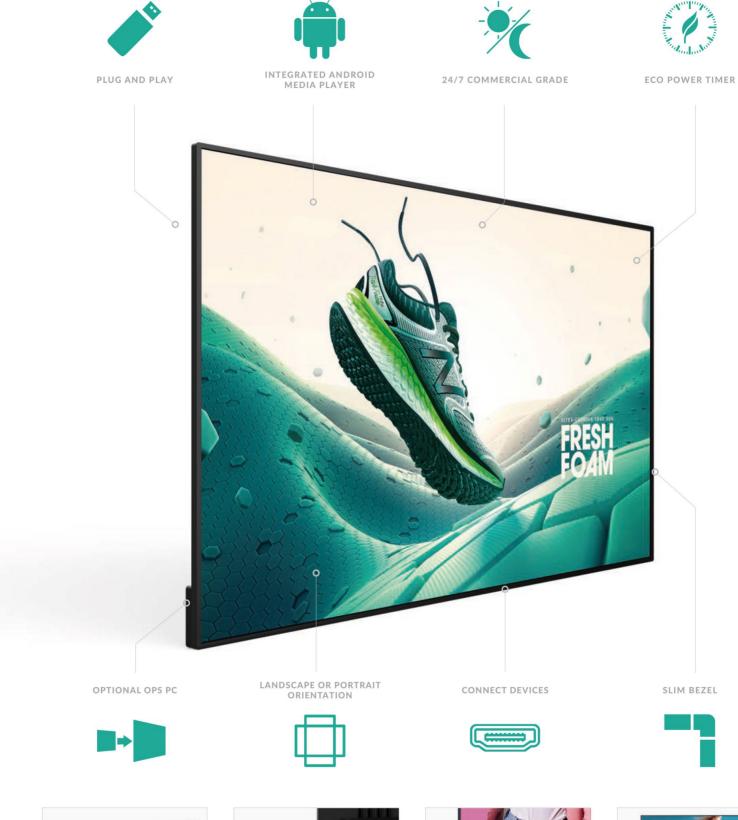











		65 Inch
	Resolution	3840x2160
	Display Area (mm)	1428.5x803.5
	Aspect Ratio	16:9
Panel	Brightness (cd/m²)	450
	Colour	16.7M
	Viewing Angle	178°
	Contrast Ratio	1000:1
Audio	Speaker Type	Stereo: 10W, 4Ω x 2, Bass: 15W, 8Ω x 1
	Inputs	HDMI x 2
AV Inputs	Outputs	HDMI Out, Audio Out
	Control	RS-232
·	Power Consumption (W)	280
Power	Input Voltage	AC110~240V(50Hz~60Hz)
	Unit Size (WxHxD mm)	1464.5x839.5x62
	Package Size (WxHxD mm)	1630x1010x215
Mechanical	VESA Holes (mm)	400x400/400x600
	Net Weight (kg)	25.85
	Gross Weight (kg)	37.8
	Operating Temperature	0 °C to 40 °C
=	Storage Temperature	-10°C to 55°C
Environmental	Operating Humidity	10% to 80%
	Storage Humidity	10% to 80%
	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)
	Media Resolution	1920x1080/1080x1920
	CPU	ARM Quad-core Cortex-A53 1.5GHz
	RAM	2GB DDR3
	Architecture	64-bit
Computer	Graphic Engine	ARM Mali T720mp2
	Hard Drive/Internal Memory (eMMC)	16GB
	USB	USB 2.0 x2
	LAN	10/100 Ethernet
	Wi-Fi	802.11b/g/n/ac
	OS	Android 6.0
1t-a	Included	Remote Control, User Manual, Power Lead
Accessories	Optional	Network Upgrade
5440 DO 95	Warranty Period	3 Year Warranty
Warranty	Technical Support	Lifetime

Errors and omissions excepted





