


Mirage

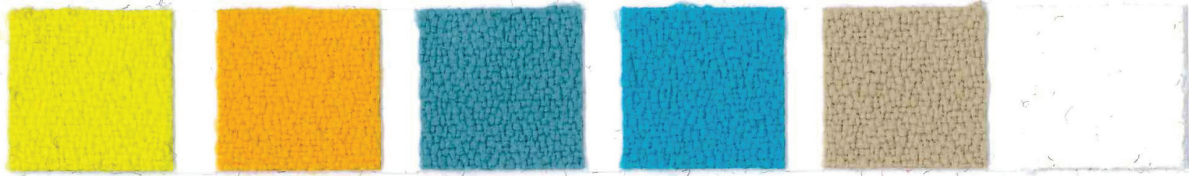

462


53

366

367

532

999

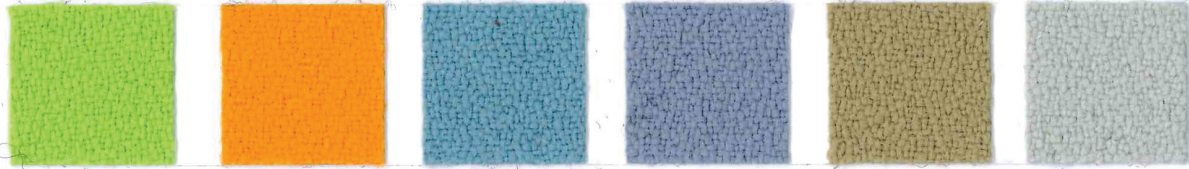

463


66

386

377

519

643

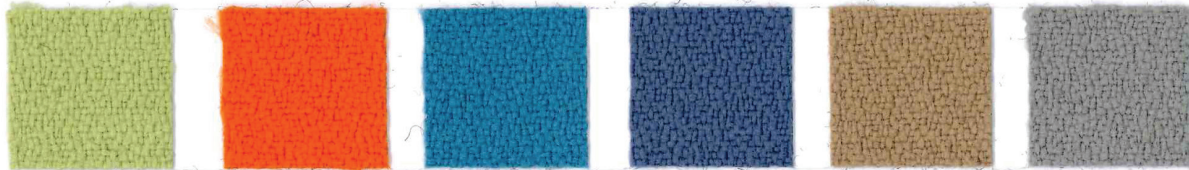

425


133

379

378

533

629

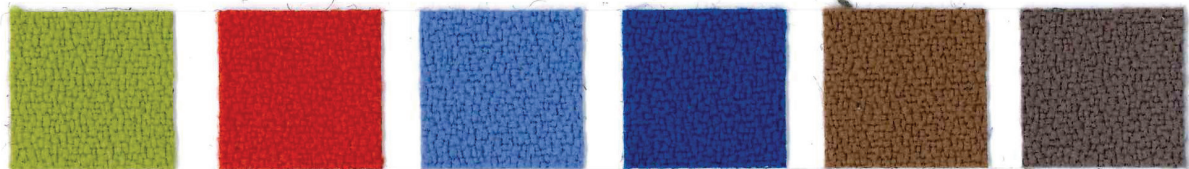

464


120

380

331

534

625

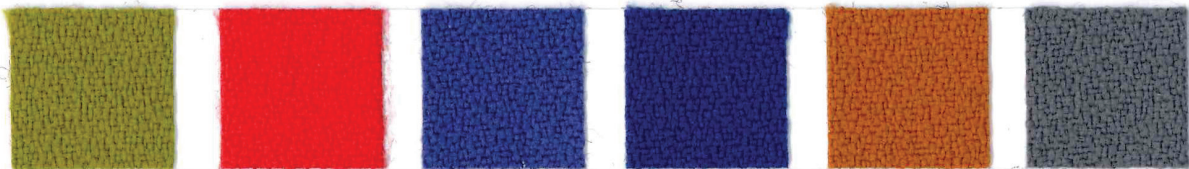

426


180

263

332

119

636

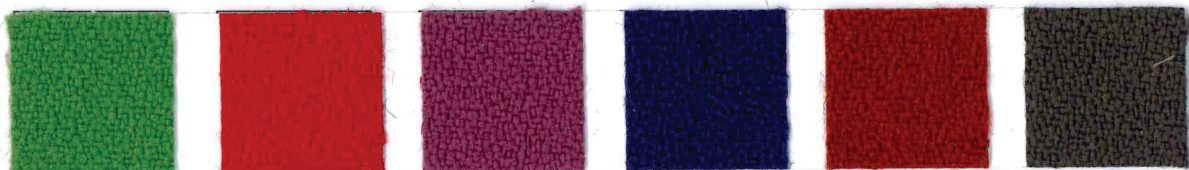

443


231

175

334

572

607

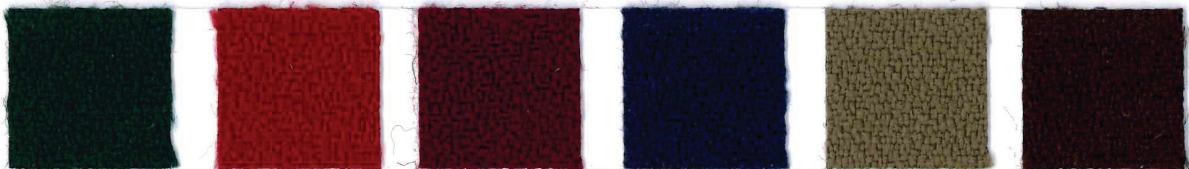

496


236

234

333

569

573

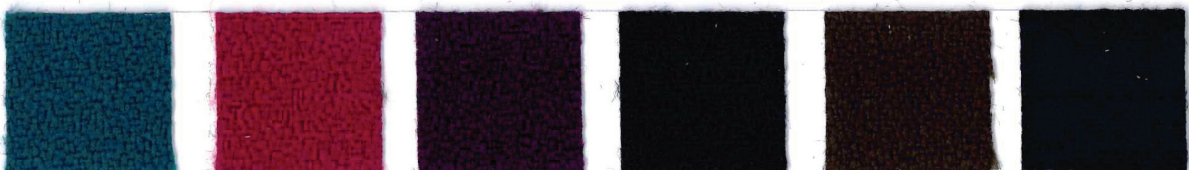

411

173



262



343



571

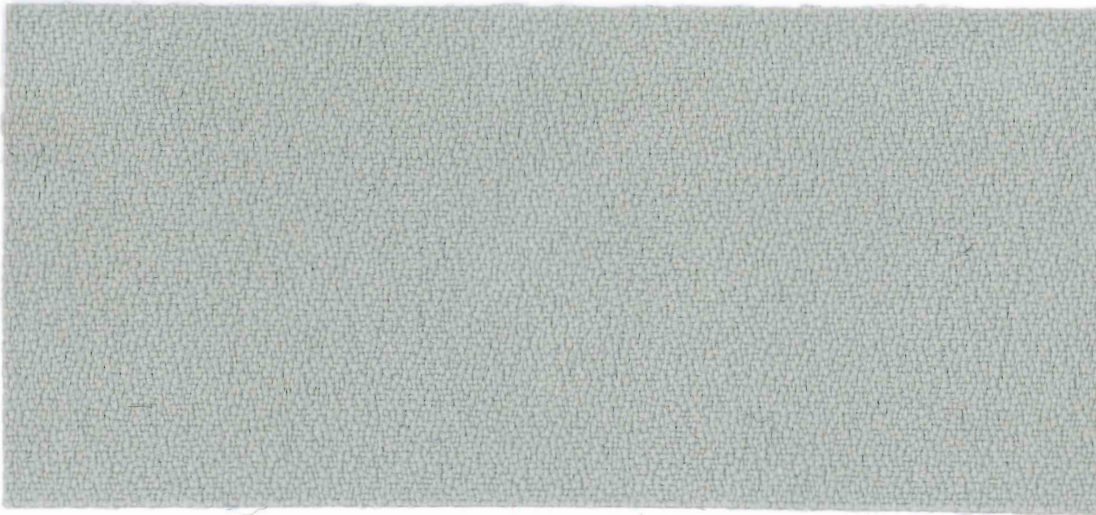651

Mirage



Composizione	100% Poliestere FR (Tr Cs)	
Peso	gr/mtl 460 ± 10%	
Altezza	cm 140 ± 2%	
Lunghezza pezze	mt 55 ± 5%	
Abrasiono	(Martindale) UNI EN ISO 12947:2000 100.000 cicli ± 20%	
Solidità alla luce	(Xenotest) UNI EN ISO 105 B02	5/6 ± ½
Certificati di	Italia - Classe 1	
Resistenza al fuoco	Germania - B1 DIN 4102 Francia - M1 Francia - NF D 60-013:2006 AM18 Austria - B1 OENORM B3825 Austria - Q1 OENORM 3800 Part. 1 Svizzera - Fire Protection Classification: 5.3 BS 5852 Crib 5 using a CM Foam 35 kg/cu.m EN 1021 Part.1-2 using a CM Foam 35 kg/cu.m EN 13773 Burning Behaviour: Class 1 EN 13501-1 ^{1,2} : B-s1, d0 EN ISO 6940/6941 USA Calif. Bull. 117 June 2013 IMO 688 (17) - IMO 563 (14) IMO RES.MSC FTP Code 307 (88) /2001 Annex 1 Part 8 using a CM Foam 35 Kg/cu.m FAR.25853 Classification: yes	
Manutenzione	Usare con regolarità l'aspirapolvere a beccuccio liscio, senza spazzolare.	
Differenze di colore	Leggere differenze di colore fra una partita e l'altra sono da considerarsi normali.	

Composition	100% Polyester FR (Tr Cs)	
Weight	gr/lm 460 ± 10%	
Width	cm 140 ± 2%	
Piece Length	lm 55 ± 5%	
Abrasion Test	(Martindale) UNI EN ISO 12947:2000 100.000 turns ± 20%	
Lightfastness	(Xenotest) UNI EN ISO 105 B02	5/6 ± ½
Flammability	Italy - Class 1	
Certificates	Germany - B1 DIN 4102 France - M1 France - NF D 60-013:2006 AM18 Austria - B1 OENORM B3825 Austria - Q1 OENORM 3800 Part. 1 Switzerland - Fire Protection Classification: 5.3 BS 5852 Crib 5 using a CM Foam 35 kg/cu.m EN 1021 Part.1-2 using a CM Foam 35 kg/cu.m EN 13773 Burning Behaviour: Class 1 EN 13501-1 ^{1,2} : B-s1, d0 EN ISO 6940/6941 USA Calif. Bull. 117 June 2013 IMO 688 (17) - IMO 563 (14) IMO RES.MSC FTP Code 307 (88) /2001 Annex 1 Part 8 using a CM Foam 35 Kg/cu.m FAR.25853 Classification: yes	
Maintenance	Use the vacuum-cleaner with smooth spout regularly, don't brush.	
Colour Matching	Slight differences between dyeing lots are considered normal.	