



ELECTRIC STORAGE SYSTEM INCLUDING HYBRID INVERTER  
FOR SINGLE-PHASE AND THREE-PHASE SOLUTIONS

# Clivet Sinergy




*Inspiring Solutions since 1989*

# General characteristics (of product family)


Modular electric tank system with inverter for combination with solar photovoltaic system, compact and stylish, ideal for residential installations.

- ✓ A easy-to-install modular system
- ✓ Hybrid power inverter 5kW in the single-phase version and 10kW in the three-phase version
- ✓ Available in 4 capacity sizes by using the same battery pack:
  - 5/10/15/20 kWh in the single-phase version
  - 10/20/30/40 kWh in the three-phase version
- ✓ Compatible with the Control4 NRG system for managing the Clivet Smart Living
- ✓ On-grid function and 5 kW back-up output for single-phase version and 10kW for three-phase version integrated connecting loads in the event of a power failure

## Single-phase version

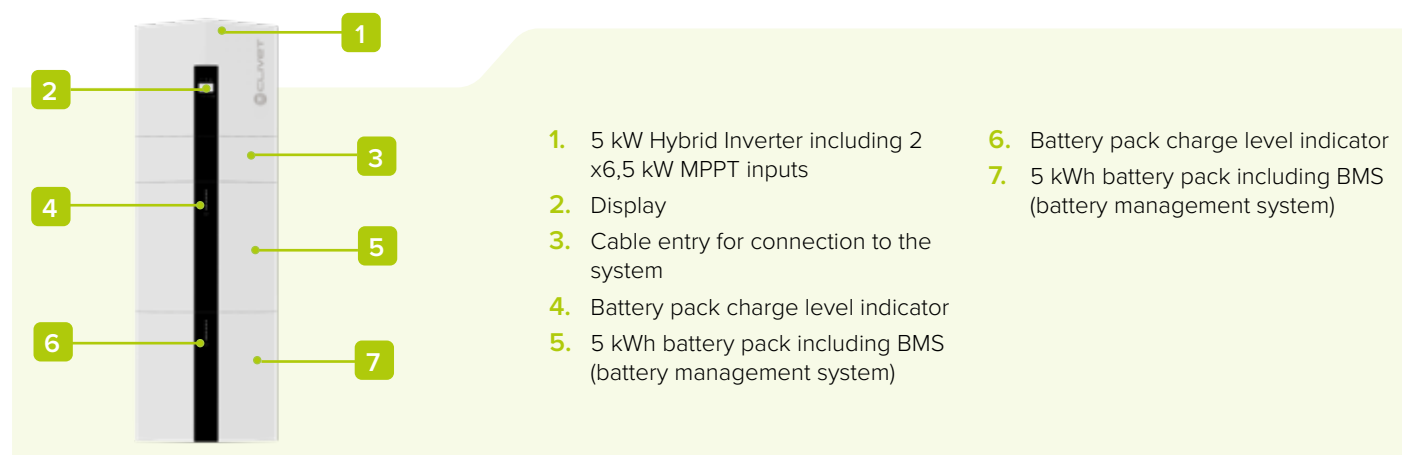

## Three-phase version

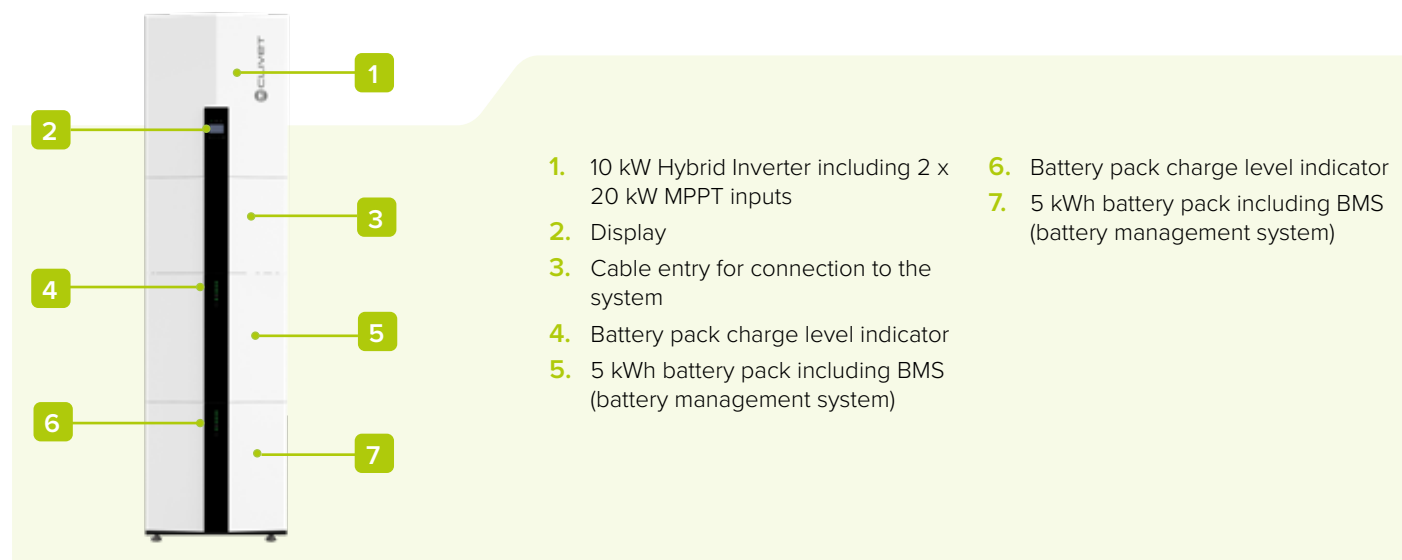


## Existing system

Connection to an existing system is made without replacing existing inverters and photovoltaic panels.

The SINERGY system automatically stores the energy produced by the panels when it is not used by users connected to the grid.

The photovoltaic inverter inputs are not used in this case.

Installation is direct to the home network without additional wiring and/or connections.

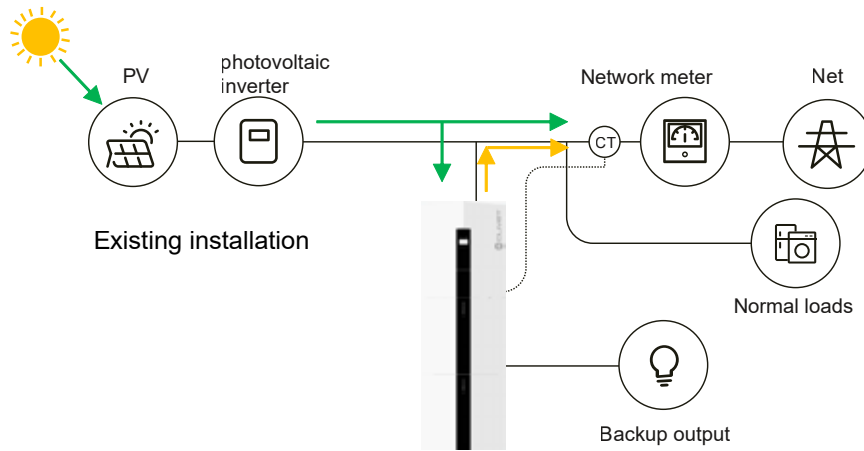


## New system

In new installations, the photovoltaic system strings can be connected directly to the two direct current inputs in Clivet's SINERGY inverter.

The inverter has 2 string inputs for a total of 6.5 kW in the single-phase version and 20 kW in the three-phase version.

This configuration keeps the photovoltaic inverter costs low.

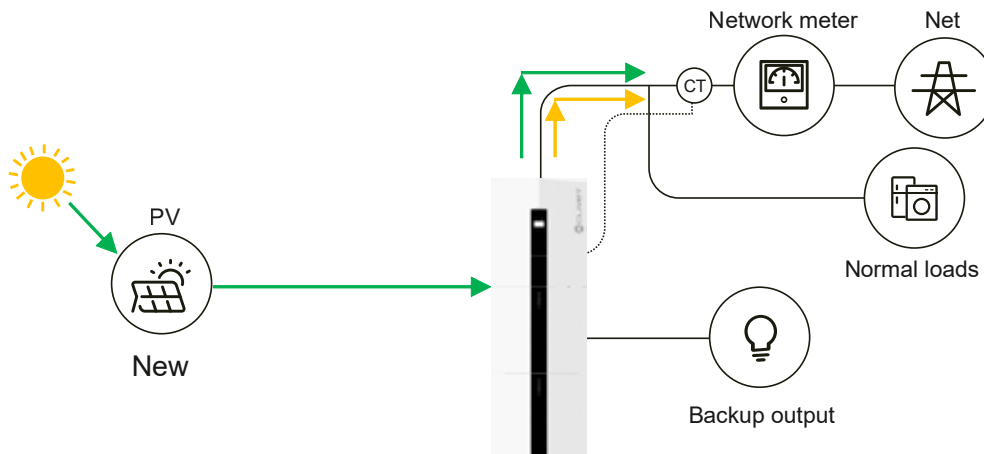


## Complete installation

SINERGY makes it possible to extend the photovoltaic range and have more installed power.

In this type of installation, the new photovoltaic system can be installed without changing the existing system.

The inverter has 2 string inputs for a total of 6.5 kW in the single-phase version and 20 kW in the three-phase version.

Newly installed panels can be connected directly to the two direct current inputs in Clivet's SINERGY inverter.

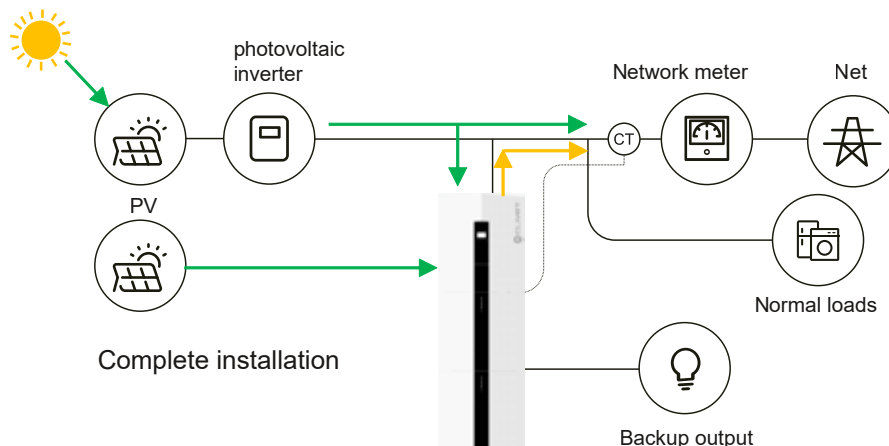

# Single-phase product range

Clivet Sinergy 51.05




5 kWh  
5 kW single battery pack

Clivet Sinergy 51.10




10 kWh  
2 x 5 kWh battery packs

Clivet Sinergy 51.15

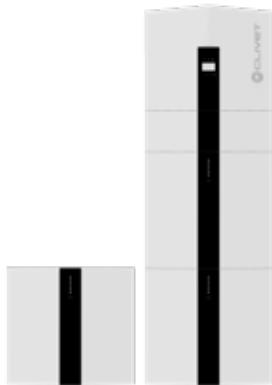

15 kWh  
3 x 5 kWh battery packs

Clivet Sinergy 51.20

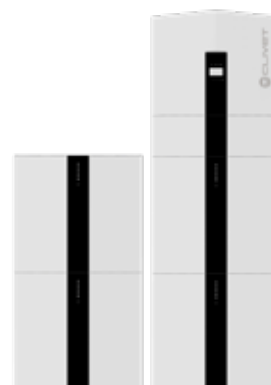

20 kWh  
4 x 5 kWh battery packs

Version	Model	Product description and composition		
SINERGY 51.05	CEC-S5B5	Energy storage system 5kWh with single-phase 5kW inverter composed by:		
		230Vac 50Hz hybrid inverter, nominal power 5kW	AAEIFK00-0001	1 unit
		5kWh single battery pack	AAEBFK00-0001	1 unit
SINERGY 51.10	CEC-S5B10	Energy storage system 10kWh with single-phase 5kW inverter composed by:		
		230Vac 50Hz hybrid inverter, nominal power 5kW	AAEIFK00-0001	1 unit
		10kWh single battery pack	AAEBFK00-0001	2 units
		Connection cable kit for single-phase version battery packs	PEEB00001	1 unit
SINERGY 51.15	CEC-S5B15	Energy storage system 15kWh with single-phase 5kW inverter composed by:		
		230Vac 50Hz hybrid inverter, nominal power 5kW	AAEIFK00-0001	1 unit
		15kWh single battery pack	AAEBFK00-0001	3 units
		Connection cable kit for single-phase version battery packs	PEEB00002	1 unit
SINERGY 51.20	CEC-S5B20	Energy storage system 20kWh with single-phase 5kW inverter composed by:		
		230Vac 50Hz hybrid inverter, nominal power 5kW	AAEIFK00-0001	1 unit
		20kWh single battery pack	AAEBFK00-0001	4 units
		Connection cable kit for single-phase version battery packs	PEEB00003	1 unit


# Three-phase product range

Clivet Sinergy 103.10




10 kWh  
2 x 5 kWh battery packs

Clivet Sinergy 103.20

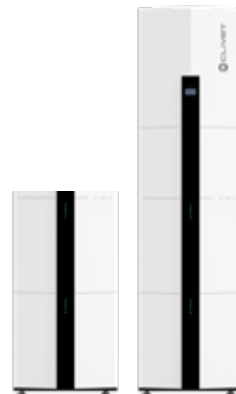


20 kWh  
4 x 5 kWh battery packs

Clivet Sinergy 103.30

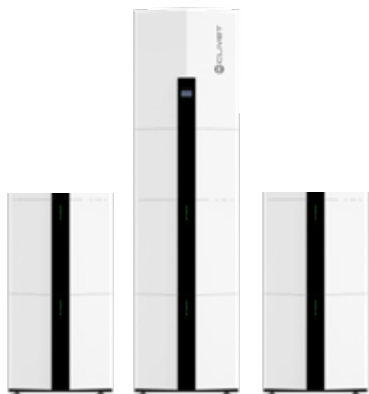

30 kWh  
6 x 5kWh single battery pack

Clivet Sinergy 103.40

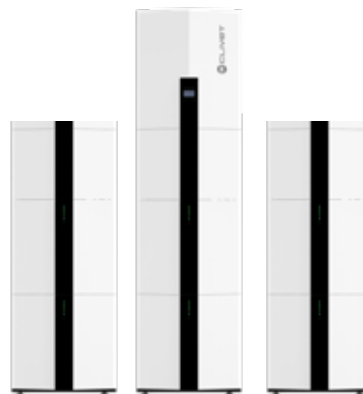

40 kWh  
8 x 5kWh single battery pack

Version	Model	Product description and composition		
SINERGY 103.10	CEC-T10B10	Energy storage system 10kWh with three-phase 10kW inverter composed by:		
		Three-phase 400Vac 50Hz hybrid inverter with 10kW nominal power	AAEPFH00-0001	1 unit
		10 kWh single battery pack	AAEBFK00-0001	2 units
		Connection cable kit for three-phase version battery packs	PEEB00008	1 unit
SINERGY 103.20	CEC-T10B20	Energy storage system 20 kWh with three-phase 10kW inverter composed by:		
		Three-phase 400Vac 50Hz hybrid inverter with 10kW nominal power	AAEPFH00-0001	1 unit
		20kWh single battery pack	AAEBFK00-0001	4 units
		Connection cable kit for three-phase version battery packs	PEEB00009	1 unit
SINERGY 103.30	CEC-T10B30	Energy storage system 30kWh with three-phase 10kW inverter composed by:		
		Three-phase 400Vac 50Hz hybrid inverter with 10kW nominal power	AAEPFH00-0001	1 unit
		30kWh battery pack	AAEBFK00-0001	6 units
		Connection cable kit for three-phase version battery packs	PEEB00010	1 unit
SINERGY 103.40	CEC-T10B40	Energy storage system 40kWh with three-phase 10kW inverter composed by:		
		Three-phase 400Vac 50Hz hybrid inverter with 10kW nominal power	AAEPFH00-0001	1 unit
		40kWh battery packs	AAEBFK00-0001	8 units
		Connection cable kit for three-phase version battery packs	PEEB00011	1 unit

## battery pack characteristics

### Physical

Battery type	LFP (LiFeO4)
Weight	57 kg
Dimensions W x H x D	540 x 530 x 250 mm
IP protection	IP65
Warranty	5 years on product, 10 years on performance

### Operation

Max. Charge/Discharge Current	50A/80A
Rated DC Power	4.096W
Maximum charge/discharge power	2.825W/4.096W
Operating temperature range	0..50°C charging
Operating temperature range	-10..50°C discharging
Humidity	0°C ~ 95% (non condensante)

### Electrical Data

Energy capacity	5,12kWh
-----------------	---------

Safety (cells)  
Pack: IEC/EN 62619;UN38.3  
Cell: IEC/EN 62619;UN38.3;UL1973

Usable capacity	4,6 kWh
Depth of discharge (DoD)	0,9
Nominal Voltage	51,2V
DC Circuit Breakers	125A
Operating Voltage Range	44,8 - 56,6V
Internal Resistance	<20mΩ
Cycle life (charge/discharge)	10.000 cycles

### BMS

Modules connection	Up to 4 single-phase system modules Up to 8 modules single-phase systems
Capacity	100-400Ah in single-phase systems 200-800Ah in three-phase systems
Power consumption	<2W

## single-phase inverter characteristics

### PV String Input

max PV input power	6500W
Max. DC Voltage	580V
Nominal Voltage	400V
MPPT Voltage Range	80V-560V
Start Voltage	130V
Number of MPP Tracker	2
Strings Per MPP Tracker	1
Max. Input Current Per MPPT	15A
Max. Short-circuit Current Per MPPT	18A

### AC Output (Grid)

Nominal AC Output Power	5.000W
Max. AC Apparent Power	7.360VA (from grid)
Max. AC Output Power	5'000W (1)
Nominal AC Voltage	230Vac
AC Grid Frequency Range	50/60 Hz ±5Hz
Max. Output Current	22A (2)
Max. Input Current	22A (2)
Power Factor (cosΦ)	0.8 leading - 0.8 lagging
THDi	< 3%

### Battery Input

Battery type	LFP (LiFePO4)
Nominal Battery Voltage	48V
Max. Charging Voltage Range	40-60V
Max. Charging Current	100A
Max. Discharging Current	100A
Battery Capacity	100-400Ah
Maximum charge/discharge power	4600/5000W

Certification & Standard  
IEC/EN 62109-1&2;IEC/EN61000-6-1;IEC/EN61000-6-2;EN61000-6-3; IEC/EN61000-6-4;IEC/EN61000-3-11;  
EN61000-3-12;IEC60529;IEC 60068;IEC61683;IEC62116;IEC61727;EN50549-1;  
AS 4777.2;NRS 097;VDE-AR-N-4105;CEI0-21;G98;G99;C10/C11

NOTE

1. Nominal AC output power is 4999W for Australia and 4600W for Germany and South Africa  
2. Maximum output current is 21.7A for Australia and 20A for Germany and South Africa

### AC Output (Backup)

Max. Output Apparent Power	5.000VA
Peak Output Apparent Power	6.900VA 10sec
Max. Output Current	20A
Nominal Output Voltage	230V
Nominal Output Frequency	50/60Hz
Output THDv (@Linear Load)	<3% (Linear Load)

### Efficiency

Max. PV Efficiency	97,0%
--------------------	-------

### Protection

Anti-islanding Protection	YES
Output Over Current	YES
DC Reverse Polarity Protection	YES
String Fault Detection	YES
AC/DC Surge Protection	DC type II; AC type III
Insulation Detection	YES
AC Short Circuit Protection	YES

### General Specifications

Dimensions W x H x D	540 x 590 x 255mm
Weight	32kg
Operating Temperature Range	-25°C ~ +60°C
Humidity	0°C ~ 95% (non condensing)
Noise (dB)	<25
Cooling Type	Natural convection
Max. Operation Altitude	2.000m
IP Class	IP65
Communication	RS485
Display	LCD

## three-phase inverter characteristics

### PV String Input

max PV input power	20.000 W
Max. DC Voltage	1.100V
Nominal Voltage (DC)	720V
MPPT Voltage Range	140V-1.000V
MPPT Voltage Range (full load)	420V-850V
Start Voltage	130V
MPPT string inputs	2
Strings Per MPP Tracker	1
Max. Input Current Per MPPT	15A
Max. Short-circuit Current Per MPPT	20A

### AC Output (Grid)

Nominal AC Output Power	10.000W
Max. AC Apparent Power	11.000VA
Max AC input power	17.800W (from grid)
Nominal AC Voltage	230V/400Vac 3P+N+PE
AC Grid Frequency Range	50/60 Hz $\pm$ 5Hz
Max. Output Current	16A
Max. Input Current	25A
Power Factor (cos $\Phi$ )	0.8 leading - 0.8 lagging
THDi	< 3%

### Battery Input

Battery type	LFP (LiFePO4)
Nominal Battery Voltage	51.2V
Max. Charging Voltage Range	44-58V
Max. Charging Current	160A
Max. Discharging Current	200A
Battery Capacity	200-800Ah
Maximum charge/discharge power	8.000/10.000W

### AC Output (Backup)

Max. Output Apparent Power	10.000VA
----------------------------	----------

#### Certification & Standard

Grid regulation: EN50549-1, VDE-AR-N4105, CEI 0-21

Safety regulation: IEC/EN 62109-1&2, IEC62040-1, IEC62619

EMC: EN61000-6-1, EN61000-6-2, EN61000-6-3, EN61000-6-4, EN61000-3-2, EN61000-3-3,

EN61000-3-11, EN61000-3-12

Nominal AC Output Power	9200W
Max. Output Current	14.5A
Nominal Output Voltage	230/400Vac , 3P+N+PE
Nominal Output Frequency	50/60Hz
Output THDv (@Linear Load)	<3% (Linear Load)

### Efficiency

Max. PV Efficiency	98,1%
--------------------	-------

### Protection

DC Switch	Bipolar DC Switch (125A/Pole)
Anti-islanding Protection	YES
Output Over Current	YES
DC Reverse Polarity Protection	YES
String Fault Detection	YES
AC/DC Surge Protection	DC type II; AC type III
Insulation Detection	YES
AC Short Circuit Protection	YES

### General Specifications

Dimensions W x H x D	540 x 980 x 250mm
Weight	54kg
Operating Temperature Range	-25°C to +60°C, derating above 40 °C
Humidity	0°C ~ 95% (non condensing)
Noise (dB)	<25
Cooling Type	Natural convection
Max. Operation Altitude	2.000m
IP Class	IP65
Communication	RS485
Display	LCD

The data contained in this document are not binding and may be changed by the manufacturer without obligation of prior notice.

Images may vary depending on the system layout.


No part of this publication may be reproduced.

Clivet, in compliance with Regulation 517/2014, informs that its products contain or function with the use of fluorinated greenhouse gases

**FOR OVER 30 YEARS** WE HAVE BEEN  
OFFERING SOLUTIONS TO ENSURE  
SUSTAINABLE COMFORT AND THE WELL-  
BEING OF PEOPLE AND THE ENVIRONMENT

[www.clivet.com](http://www.clivet.com)

**MideaGroup**  
*humanizing technology*



Valid from: May 2023  
DF23B039GB-01



**CLIVET S.p.A.**

Via Camp Lonc 25, Z.I. Villapaiera 32032 - Feltre (BL) - Italy  
Tel. +39 0439 3131 - [info@clivet.it](mailto:info@clivet.it)

**CLIVET GMBH**

Hummelsbütteler Steindamm 84,  
22851 Norderstedt, Germany  
Tel. +49 40 325957-0 - [info.de@clivet.com](mailto:info.de@clivet.com)

**Clivet Group UK LTD**

Units F5 & F6 Railway Triangle,  
Portsmouth, Hampshire PO6 1TG  
Tel. +44 02392 381235 -  
[Enquiries@Clivetgroup.co.uk](mailto:Enquiries@Clivetgroup.co.uk)

**CLIVET LLC**

Office 508-511, Elektrozavodskaya st. 24,  
Moscow, Russian Federation, 107023  
Tel. +7495 6462009 - [info.ru@clivet.com](mailto:info.ru@clivet.com)

**CLIVET MIDEAST FZCO**

Dubai Silicon Oasis (DSO), Headquarter, E Wing,  
EG04-05 Dubai, UAE  
Tel. +971 45015840 [info@clivet.ae](mailto:info@clivet.ae)

**Clivet South East Europe**

Jarušćica 9b  
10000, Zagreb, Croatia  
Tel. +3851 222 8784 - [info.see@clivet.com](mailto:info.see@clivet.com)

**CLIVET France**

10, rue du Fort de Saint Cyr - 78180 Montigny le  
Bretonneux, France  
[info.fr@clivet.com](mailto:info.fr@clivet.com)

**Clivet Airconditioning Systems Pvt Ltd**

Office No.501 & 502,5th Floor, Commercial -I,  
Kohinoor City, Old Premier Compound, Off LBS  
Marg, Kirod Road, Kurla West, Mumbai  
Maharashtra 400070, India  
Tel. +91 22 30930200 - [sales.india@clivet.com](mailto:sales.india@clivet.com)