

System Components



Inlet Control Group



Expansion Vessel



Tundish



Zone Valve



Cylinder Stat




Hi Limit Single Thermostat



T&P Valve

Dimensions

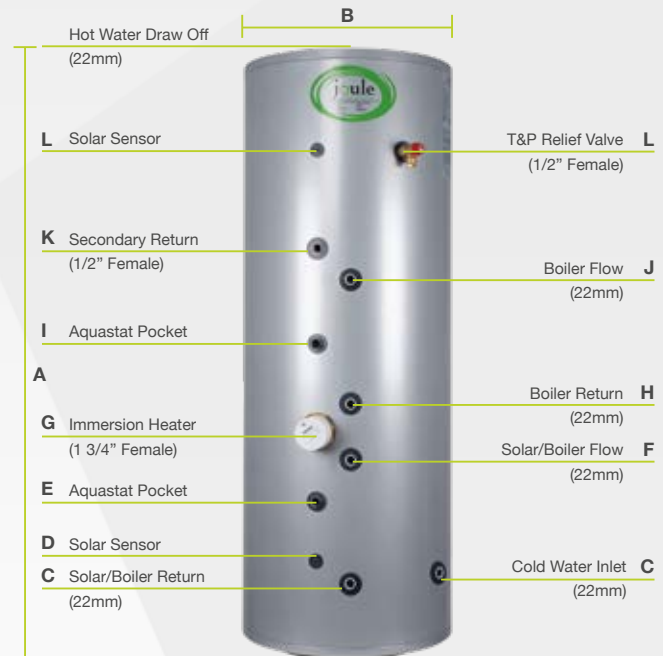

Slimline Twin Solar

Capacity	120L	150L	175L	205L
Height (A)	1085	1335	1535	1880
Diameter (B)	475	475	475	475
Weight (empty)	43	46	49	50
Weight (full)	157	191	214	242
Hot water volume	114	145	165	192
C	191	191	191	191
D	241	241	241	241
E	341	381	476	476
F	441	481	576	576
G	506	546	641	641
H	571	611	706	706
I	696	751	826	826
J	821	901	996	996
K	761	1001	1151	1351
L	906	1151	1301	1601
Energy Efficiency Class	C	C	C	C
Heat up Time - coil (Mins)	11	13	15	21
Standing Loss (W)	65	70	79	84