


Sure Lock

Spa Cover Latch Set AC1028

- 4 Locking latch bodies
- 4 Strap buckles
- 2 Keys
- 12 Stainless steel screws

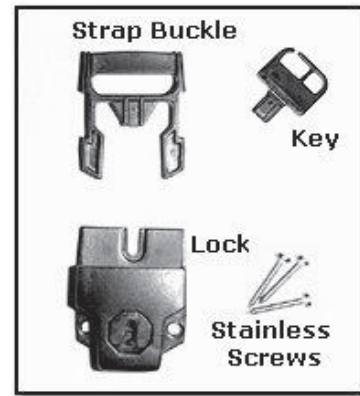

INSTRUCTIONS:

Strap Buckles

If existing strap buckles are serviceable and of the same type as supplied in this kit, they may be reused. If existing buckles are broken, follow steps below for replacement.


1. Remove broken buckles from spa cover straps. Cut buckles with snips for removal, if necessary.



2. Replace strap buckles. Snip out a 1/8" section from strap buckle as shown below to facilitate a strap slot for installation of replacement buckles, without the need for cutting and re-sewing the straps.



3. Carefully slide strap material through the cut slot.

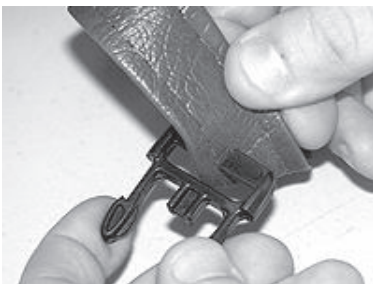

Locking Latches

1. Position and center the spa cover on spa.
2. Position locking latches on spa sides in locations corresponding to the spa straps. Allow about 1/2" to 3/4" slack in straps for ease of latching and removal.
3. Attach latch bodies with (3) Phillips screws each. (For tile or concrete installations, use appropriate anchors and/or epoxy to secure screws).

Keep cover straps fastened when spa is not in use. For added security, latches may be locked with supplied keys.