


Tow Kit Installation

- 1) Remove buckles from the tow kit strap and place the towing ring at the front of the boat, then proceed to loop the tow kit straps through the front two inner life line D-rings on both sides of the boat. Repeat these steps for the other side.



- 2) Run the tow straps around the lower transom bar and loop back through the buckle.

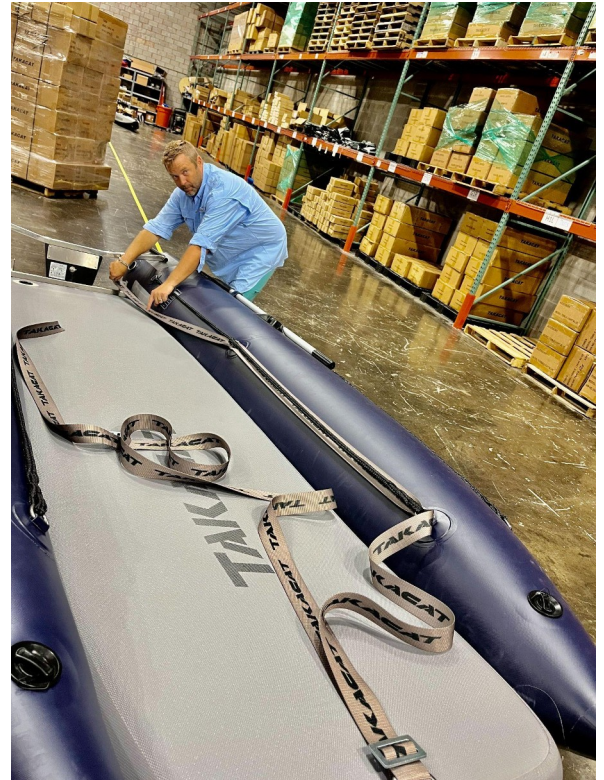

- 3) L her



- 4) Connect tow line from towing vessel to bridle ring.

