

KABLE KONTROL



Colored Cable Ties - Nylon 6:6

Description:

Colored cable ties are an ideal and cost-effective option for all applications that require easy identification. Our self locking design allows for easy application when securing the cable ties. Colored nylon cable ties can be used outdoors however, they will only serve as a temporary solution since they are not UV protected.

Available in various lengths, tensile strengths, and colors

Our colored cable ties are offered in 100-piece packs

Custom Marking  Compatible



Applications:

Colored cable ties are ideal for a wide variety of applications such as:


- Electrical Installations
- Cable management
- Automotive
- Securing Bundles
- Landscaping
- Indoor Installations
- Identification

Certifications:

- RoHS Compliant: RoHS Compliant 2011/65/EU
- AH-2 Plenum Rating

| Standard Color Cable Ties | | | | | | |
|---------------------------|-------------|------------------|---------------|---------------------|-------------|---------------|
| Part Number | Length | Tensile Strength | Strap Width | Max Bundle Diameter | Mkt. Spec | Case Quantity |
| CT204CL-Brown | 4" (100mm) | 18 lbs | 1/8" (2.5mm) | 1" (25mm) | M33367-4-1 | 400 |
| CT204CL-Red | 4" (100mm) | 18 lbs | 1/8" (2.5mm) | 1" (25mm) | M33367-4-2 | 400 |
| CT204CL-Orange | 4" (100mm) | 18 lbs | 1/8" (2.5mm) | 1" (25mm) | M33367-4-3 | 400 |
| CT204CL-Yellow | 4" (100mm) | 18 lbs | 1/8" (2.5mm) | 1" (25mm) | M33367-4-4 | 400 |
| CT204CL-Green | 4" (100mm) | 18 lbs | 1/8" (2.5mm) | 1" (25mm) | M33367-4-5 | 400 |
| CT204CL-Blue | 4" (100mm) | 18 lbs | 1/8" (2.5mm) | 1" (25mm) | M33367-4-6 | 400 |
| CT204CL-Purple | 4" (100mm) | 18 lbs | 1/8" (2.5mm) | 1" (25mm) | M33367-4-7 | 400 |
| CT204CL-Gray | 4" (100mm) | 18 lbs | 1/8" (2.5mm) | 1" (25mm) | M33367-4-8 | 400 |
| CT261CL-Brown | 8" (203mm) | 50 lbs | 3/16" (4.8mm) | 2.16" (55mm) | M33367-1-1 | 100 |
| CT261CL-Red | 8" (203mm) | 50 lbs | 3/16" (4.8mm) | 2.16" (55mm) | M33367-1-2 | 100 |
| CT261CL-Orange | 8" (203mm) | 50 lbs | 3/16" (4.8mm) | 2.16" (55mm) | M33367-1-3 | 100 |
| CT261CL-Yellow | 8" (203mm) | 50 lbs | 3/16" (4.8mm) | 2.16" (55mm) | M33367-1-4 | 100 |
| CT261CL-Green | 8" (203mm) | 50 lbs | 3/16" (4.8mm) | 2.16" (55mm) | M33367-1-5 | 100 |
| CT261CL-Blue | 8" (203mm) | 50 lbs | 3/16" (4.8mm) | 2.16" (55mm) | M33367-1-6 | 100 |
| CT261CL-Purple | 8" (203mm) | 50 lbs | 3/16" (4.8mm) | 2.16" (55mm) | M33367-1-7 | 100 |
| CT261CL-Gray | 8" (203mm) | 50 lbs | 3/16" (4.8mm) | 2.16" (55mm) | M33367-1-8 | 100 |
| CT261CL-PINK | 8" (203mm) | 50 lbs | 3/16" (4.8mm) | 2.16" (55mm) | M33367-1-18 | 100 |
| CT262CL-Brown | 11" (280mm) | 50 lbs | 3/16" (4.8mm) | 2.16" (55mm) | M33367-1-1 | 85 |
| CT262CL-Red | 11" (280mm) | 50 lbs | 3/16" (4.8mm) | 2.16" (55mm) | M33367-1-2 | 85 |
| CT262CL-Orange | 11" (280mm) | 50 lbs | 3/16" (4.8mm) | 2.16" (55mm) | M33367-1-3 | 85 |
| CT262CL-Yellow | 11" (280mm) | 50 lbs | 3/16" (4.8mm) | 2.16" (55mm) | M33367-1-4 | 85 |
| CT262CL-Green | 11" (280mm) | 50 lbs | 3/16" (4.8mm) | 2.16" (55mm) | M33367-1-5 | 85 |
| CT262CL-Blue | 11" (280mm) | 50 lbs | 3/16" (4.8mm) | 2.16" (55mm) | M33367-1-6 | 85 |
| CT262CL-Purple | 11" (280mm) | 50 lbs | 3/16" (4.8mm) | 2.16" (55mm) | M33367-1-7 | 85 |
| CT262CL-Gray | 11" (280mm) | 50 lbs | 3/16" (4.8mm) | 3.189" (81mm) | M33367-1-8 | 85 |
| CT265CL-Brown | 14" (368mm) | 50 lbs | 3/16" (4.8mm) | 4.01" (102mm) | M33367-2-1 | 60 |
| CT265CL-Red | 14" (368mm) | 50 lbs | 3/16" (4.8mm) | 4.01" (102mm) | M33367-2-2 | 60 |
| CT265CL-Orange | 14" (368mm) | 50 lbs | 3/16" (4.8mm) | 4.01" (102mm) | M33367-2-3 | 60 |
| CT265CL-Yellow | 14" (368mm) | 50 lbs | 3/16" (4.8mm) | 4.01" (102mm) | M33367-2-4 | 60 |
| CT265CL-Green | 14" (368mm) | 50 lbs | 3/16" (4.8mm) | 4.01" (102mm) | M33367-2-5 | 60 |
| CT265CL-Blue | 14" (368mm) | 50 lbs | 3/16" (4.8mm) | 4.01" (102mm) | M33367-2-6 | 60 |
| CT265CL-Purple | 14" (368mm) | 50 lbs | 3/16" (4.8mm) | 4.01" (102mm) | M33367-2-7 | 60 |
| CT265CL-Gray | 14" (368mm) | 50 lbs | 3/16" (4.8mm) | 4.01" (102mm) | M33367-2-8 | 60 |

| Standard Fluorescent Color Cable Ties | | | | | | |
|---------------------------------------|-------------|------------------|---------------|---------------------|-----------|---------------|
| Part Number | Length | Tensile Strength | Strap Width | Max Bundle Diameter | Mkt. Spec | Case Quantity |
| CTS04FL-BL-100 | 4" (100mm) | 18 lbs | 1/8" (2.5mm) | 1" (25mm) | - | 400 |
| CTS04FL-OR-100 | 4" (100mm) | 18 lbs | 1/8" (2.5mm) | 1" (25mm) | - | 400 |
| CTS04FL-PK-100 | 4" (100mm) | 18 lbs | 1/8" (2.5mm) | 1" (25mm) | - | 400 |
| CTS04FL-YL-100 | 4" (100mm) | 18 lbs | 1/8" (2.5mm) | 1" (25mm) | - | 400 |
| CTS08FL-BL-100 | 8" (203mm) | 50 lbs | 3/16" (4.8mm) | 2.16" (55mm) | - | 100 |
| CTS08FL-OR-100 | 8" (203mm) | 50 lbs | 3/16" (4.8mm) | 2.16" (55mm) | - | 100 |
| CTS08FL-PK-100 | 8" (203mm) | 50 lbs | 3/16" (4.8mm) | 2.16" (55mm) | - | 100 |
| CTS08FL-YL-100 | 8" (203mm) | 50 lbs | 3/16" (4.8mm) | 2.16" (55mm) | - | 100 |
| CTS11FL-BL-100 | 11" (280mm) | 50 lbs | 3/16" (4.8mm) | 3.189" (81mm) | - | 85 |
| CTS11FL-OR-100 | 11" (280mm) | 50 lbs | 3/16" (4.8mm) | 3.189" (81mm) | - | 85 |
| CTS11FL-PK-100 | 11" (280mm) | 50 lbs | 3/16" (4.8mm) | 3.189" (81mm) | - | 85 |
| CTS11FL-YL-100 | 11" (280mm) | 50 lbs | 3/16" (4.8mm) | 3.189" (81mm) | - | 85 |
| CTS14FL-BL-100 | 14" (368mm) | 50 lbs | 3/16" (4.8mm) | 4.01" (102mm) | - | 60 |
| CTS14FL-OR-100 | 14" (368mm) | 50 lbs | 3/16" (4.8mm) | 4.01" (102mm) | - | 60 |
| CTS14FL-PK-100 | 14" (368mm) | 50 lbs | 3/16" (4.8mm) | 4.01" (102mm) | - | 60 |
| CTS14FL-BL-100 | 14" (368mm) | 50 lbs | 3/16" (4.8mm) | 4.01" (102mm) | - | 60 |

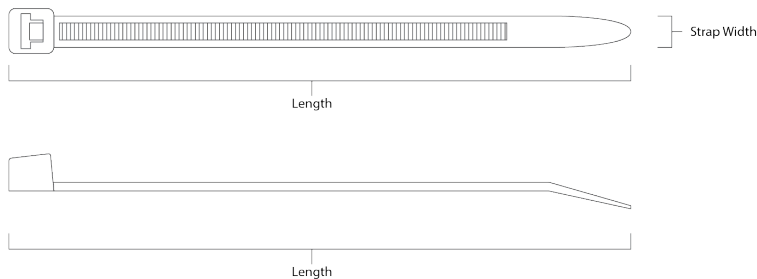

| MATERIAL | MIN OPERATING TEMPERATURE | MAX OPERATING TEMPERATURE | UV RESISTANCE | UL FLAME RATING |
|-----------|---------------------------|---------------------------|---------------|-----------------|
| Nylon 6/6 | -40°F -40°C | 185°F 85°C | None | 94V-2 |

