




Kable Kontrol™ Convoluted Split Wire Loom Tubing – Polyethylene

Available from ¼" to 3-1/2" & Multiple Colors

- MADE IN NORTH AMERICA
- Resistant To Auto Fluids & Chemicals
- Temperature Range -40°F To 200°F (-40°C - 93°C)
- Made of Durable Black Polyethylene
- Slit Wire Looms Allows For Easy And Quick Installation
- REACH & RoHS COMPLIANT


WIDE RANGE OF COLORS

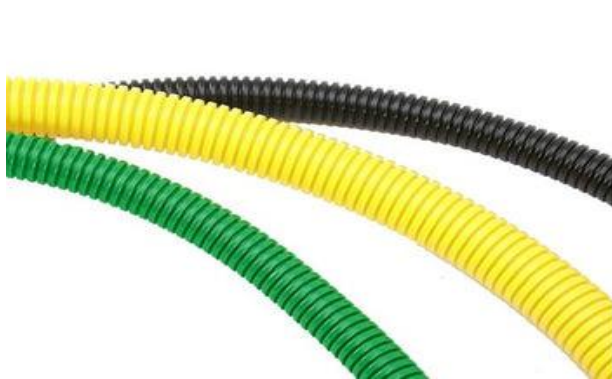

Sizes (Inside Diameter)	Colors
1/4" (6 mm)	Yellow, White, Blue, Red, Green, Purple, Black
3/8" (9 mm)	Yellow, White, Blue, Red, Green, Purple, Black
1/2" (13 mm)	Gray, Orange, Yellow, White, Blue, Red, Green, Purple, Beige, Black
5/8" (16 mm)	Black
3/4" (19 mm)	Orange, Yellow, White, Blue, Red, Green, Purple, Black
1" (23 mm)	Gray, Orange, Yellow, White, Blue, Red, Beige, Black
1-1/4" (30 mm)	Black
1-1/2" (40 mm)	White, Beige, Black
2" (51 mm)	White, Black
2-1/2" (64 mm)	Black
3-1/2" (89 mm)	Black


Technical Specifications & Test Data

Nominal Internal Diameter	Dimension "A" Inside Diameter		Dimension "B" Outside Diameter		Dimension "C" Wall Thickness
	Min	Max	Min	Max	
1/4" (6 mm)	0.237" (6.02 mm)	0.266" (6.76 mm)	0.372" (9.45 mm)	0.400" (10.16 mm)	0.005" (0.12 mm)
3/8" (9 mm)	0.341" (8.66 mm)	0.380" (9.65 mm)	0.496" (12.59 mm)	0.526" (13.36 mm)	0.005" (0.12 mm)
1/2" (13 mm)	0.471" (11.97 mm)	0.515" (13.07 mm)	0.645" (16.39 mm)	0.681" (17.31 mm)	0.005" (0.12 mm)
5/8" (16 mm)	0.603" (15.32 mm)	0.639" (16.23 mm)	0.802" (20.36 mm)	0.837" (21.26 mm)	0.005" (0.12 mm)
3/4" (19 mm)	0.707" (17.96 mm)	0.759" (19.28 mm)	0.950" (24.13 mm)	0.989" (25.12 mm)	0.005" (0.12 mm)
1" (23 mm)	0.897" (22.78 mm)	0.949" (24.10 mm)	1.077" (27.36 mm)	1.109" (28.17 mm)	0.006" (0.15 mm)
1-1/4" (30 mm)	1.199" (30.45 mm)	1.257" (31.93 mm)	1.446" (36.73 mm)	1.500" (38.10 mm)	0.006" (0.15 mm)
1-1/2" (40 mm)	1.566" (39.78 mm)	1.647" (41.83 mm)	1.867" (47.42 mm)	1.947" (49.45 mm)	0.006" (0.15 mm)
2" (51 mm)	1.969" (50.01 mm)	2.038" (51.77 mm)	2.285" (58.04 mm)	2.388" (60.66 mm)	0.011" (0.028 mm)
2-1/2" (64 mm)	2.447" (62.15 mm)	2.516" (63.9 mm)	2.771" (70.39 mm)	2.874" (73.01 mm)	0.011" (0.028 mm)
3-1/2" (89 mm)	3.481" (88.41 mm)	3.559" (90.41 mm)	3.81" (97 mm)	3.937" (100 mm)	0.011" (0.028 mm)

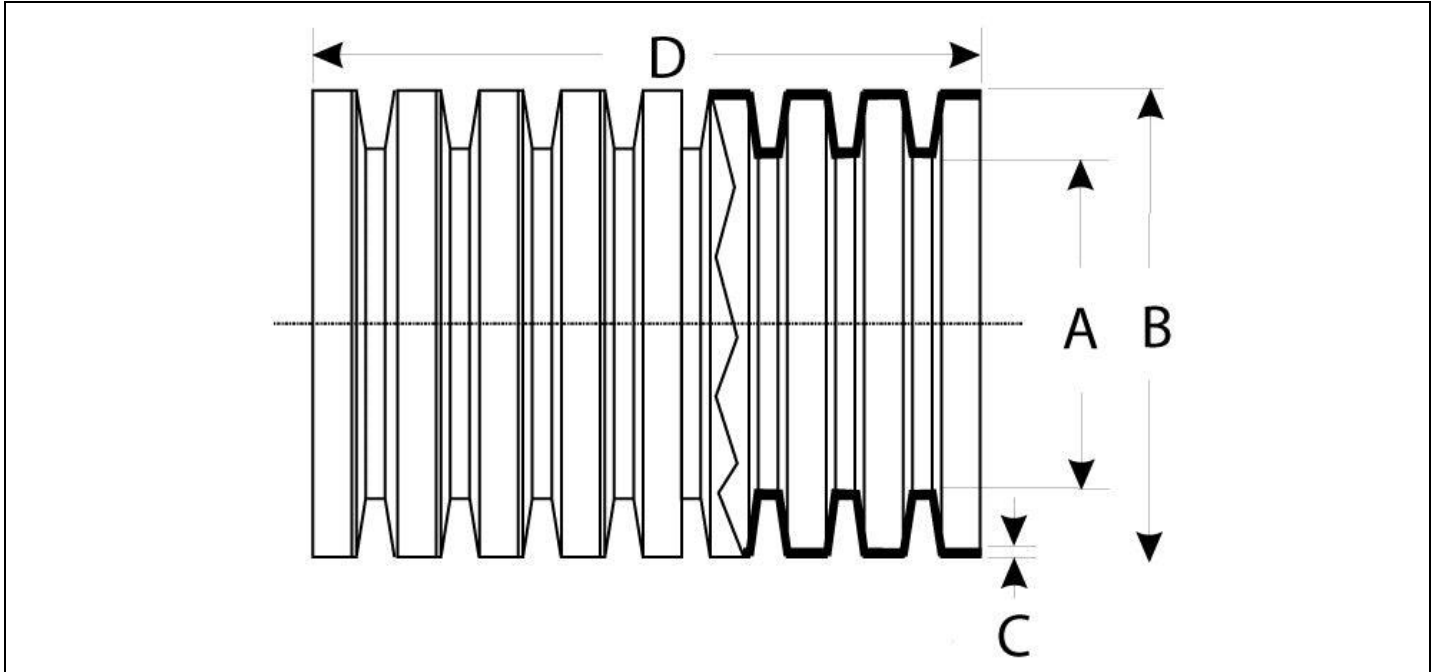

Performance Enhancers			
Flame Retardant	No		
UV Inhibitor	No		
Heat Stabilizer	No		
Performance Characteristics			
Flexibility	Excellent		
Abrasion Resistance	Good		
Chemical Resistance	Good See Chemical Resistant Report: CR-013		
Recommended Operating Upper Temperature	+200°F (93°C)		
Recommended Operating Lower Temperature	-40°F (-40°C)		
Typical Physical Properties	Test Method	Value	Units
Specific Gravity/Density	ASTM D792	0.924	-

**MADE WITH HIGH GRADE
DURABLE POLYETHYLENE**

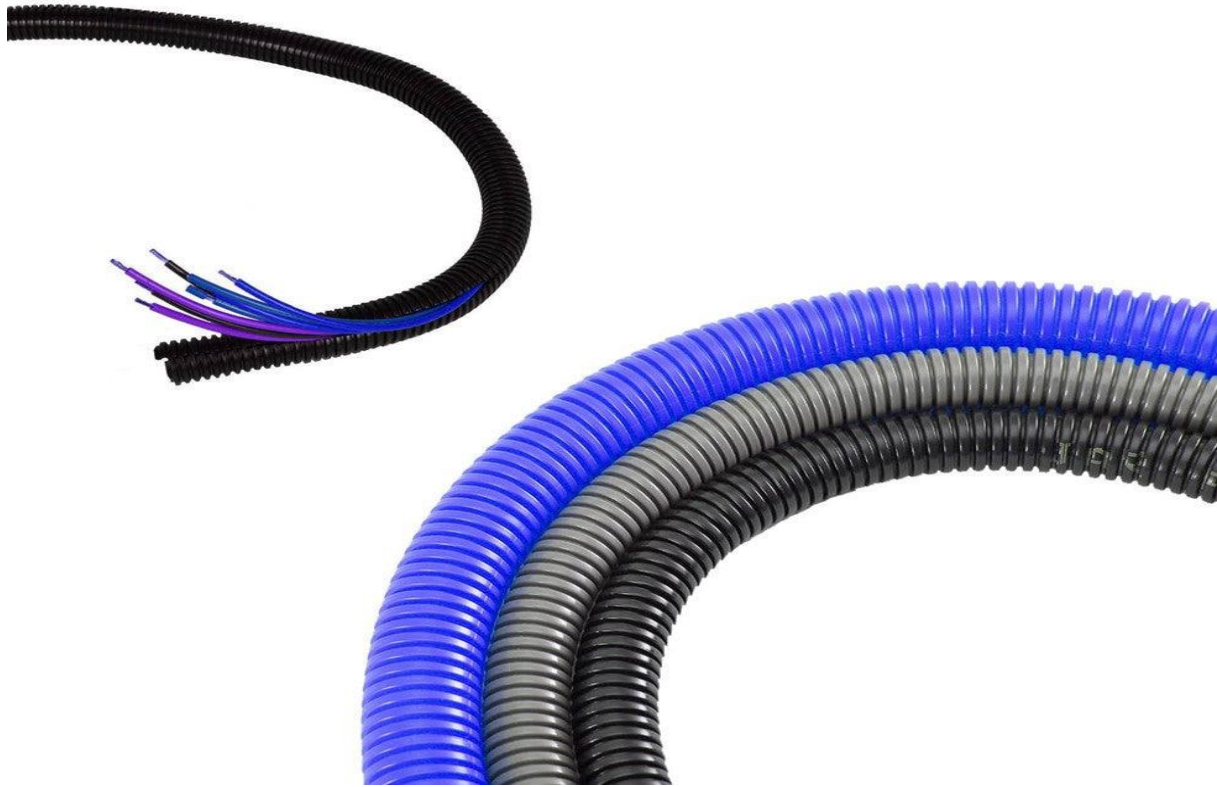

**RESISTANT TO AUTO FLUIDS
AND CHEMICALS**



WIDE APPLICATIONS



Contact us:

1-877-284-7760

Mon-Thurs:

8:30AM - 5:30PM EST

Friday:

8:30AM - 5PM EST

Email: Sales@kablekontrol.com

Website: www.kablekontrol.com

