

# KABLE KONTROL

## Assorted Cable Tie Kits - Nylon 6:6

### Description:

Kable Kontrol Assorted Length Cable Ties Kit have 500 Pcs of Cable ties with different lengths which includes 4", 5.5", 8", 11", and 14" Inch. Our self locking design allows for easy application when securing the cable ties. The black cable ties are UV rated and can be used in both indoor and outdoor applications. The natural cable ties can be used indoors.



Available in both black and natural. 500 piece packs.

**Custom Marking Compatible** 



### Applications:

Assorted Cable Tie Kits are ideal for a wide variety of applications such as:

- Extreme conditions
- Cable management
- Corrosive Environments
- Securing Bundles
- Transportation and Automotive
- Indoor and Outdoor Installations
- Underground Installations

### Certifications:


- UL Listed, File No. E530766 Positioning Device 33AS
- UL Standard UL 62275 TYPE 21S
- RoHS Compliant: RoHS Compliant 2011/65/EU



CT-KIT-MS-BK Includes:				
Length	Tensile Strength	Strap Width	Max Bundle Diameter	Mil-Spec
4" Long	18 lbs	2.5 mm	1"	MS3367-4-0
5.5" Long	18 lbs	2.5 mm	1.12"	-
8" Long	50 lbs	4.8 mm	2.16"	MS3367-1-0
11" Long	50 lbs	4.8 mm	3.18"	MS3367-7-0
14" Long	50 lbs	4.8 mm	4.01"	MS3367-2-0

CT-KIT-MS-BK Includes:				
Length	Tensile Strength	Strap Width	Max Bundle Diameter	Mil-Spec
4" Long	18 lbs	2.5 mm	1"	MS3367-4-9
5.5" Long	18 lbs	2.5 mm	1.12"	-
8" Long	50 lbs	4.8 mm	2.16"	MS3367-1-9
11" Long	50 lbs	4.8 mm	3.18"	MS3367-7-9
14" Long	50 lbs	4.8 mm	4.01"	MS3367-2-9

Our assorted cable tie kits come as 10 bags per case

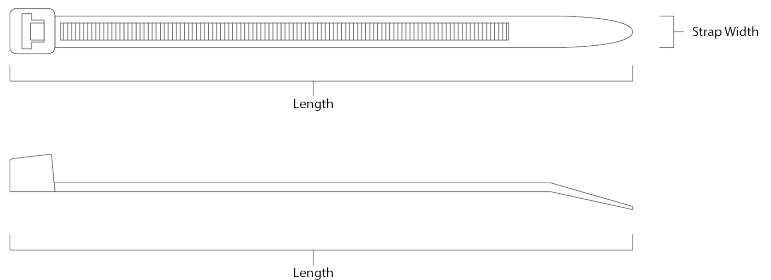

MATERIAL	MIN OPERATING TEMPERATURE	MAX OPERATING TEMPERATURE	UV RESISTANCE	UL FLAME RATING
Nylon 6/6 - Black UV Stabilized	-40°F -40°C	185°F 85°C	Very High	94V-2
Nylon 6/6 - Natural	-40°F -40°C	185°F 85°C	None	94V-2

GAMMA RADIATION RESISTANCE	MILITARY, FEDERAL, AND ASTM SPECIFICATIONS	TENSILE STRENGTH AT 73°F DRY AS MOLDED ASTM-D-638 (PSI)	OXYGEN INDEX %
1x10 Rads	ASTM-D4066 PA181	12,000	24 -28%

[www.kablekontrol.com](http://www.kablekontrol.com)