

# KABLE KONTROL



## Black Cable Ties - UV Resistant- Nylon 6:6

### Description:

UV resistant black cable ties are the ideal option for indoor and outdoor applications where cable ties will be exposed to a higher than normal amount of UV rays from the sun. These cable ties have smooth edges which will not cut your hands when installing them.

Available in various lengths, tensile strengths, and pack quantities

Custom Marking  
Compatible 



### Applications:


Black cable ties are ideal for a wide variety of applications such as:

- Electrical Installations
- Cable management
- Automotive
- Securing Bundles
- Landscaping
- Outdoor Installations
- Packaging

### Certifications:

- UL Listed, File No. E530766  
Positioning Device 33AS
- UL Standard UL 62275 TYPE 21S
- RoHS Compliant: RoHS Compliant  
2011/65/EU
- AH-2 Plenum Rating

PART NUMBER	Length	UL Listed Test Strength	Strap Width	Break Strength	Max Bundle Diameter	Mil-Spec	Case QTY
CT242	4" Long	18 lbs	2.5 mm	18 lbs	1"	MS3367-4-0	400
CT208	4" Long	18 lbs	2.5 mm	18 lbs	1"	MS3367-4-0	40
CT506-M	5.5" Long	18 lbs	2.5 mm	18 lbs	1.12"	-	30
CT507-BK	5.5" Long	40 lbs	3.5 mm	40 lbs	1.12"	MS3367-5-0	24
CT259	8" Long	18 lbs	2.5 mm	18 lbs	2.16"	-	24
CT243	8" Long	40 lbs	3.5 mm	40 lbs	2.16"	-	17
CT266	8" Long	50 lbs	4.8 mm	75 lbs	2.16"	MS3367-1-0	100
CT209	8" Long	50 lbs	4.8 mm	75 lbs	2.16"	MS3367-1-0	10
CT278	8" Long	120 lbs	7.6 mm	120 lbs	2.16"	-	60
CT102	9" Long	250 lbs	12.7 mm	250 lbs	2.3"	-	20
CT267	11" Long	50 lbs	4.8 mm	75 lbs	3.18"	MS3367-7-0	80
CT219	11" Long	50 lbs	4.8 mm	75 lbs	3.18"	MS3367-7-0	12
CT221	11" Long	50 lbs	4.8 mm	75 lbs	3.18"	MS3367-7-0	8
CT277	11" Long	120 lbs	7.6 mm	120 lbs	3.18"	-	45
CT268	14" Long	50 lbs	4.8 mm	75 lbs	4.01"	MS3367-2-0	60
CT257	14" Long	50 lbs	4.8 mm	75 lbs	4.01"	MS3367-2-0	6
CT274	14" Long	120 lbs	7.6 mm	120 lbs	4.01"	MS3367-3-0	35
CT15BK	15" Long	250 lbs	12.7 mm	250 lbs	4.125"	-	15
CT7109	18" Long	120 lbs	7.6 mm	120 lbs	4.7"	-	28
CT-18-175-BK	18" Long	175 lbs	9 mm	175 lbs	4.7"	-	15
CT19BK	19" Long	250 lbs	12.7 mm	250 lbs	5"	-	10
CT104	22" Long	250 lbs	12.7 mm	250 lbs	6"	-	10
CT-24-BK-100PK	24" Long	175 lbs	9 mm	175 lbs	6.64"	MS3367-10-0	10
CT276	28" Long	175 lbs	9 mm	175 lbs	8.66"	-	10
CT275	32" Long	175 lbs	9 mm	175 lbs	9.68"	MS3367-12-0	10
CT299	36" Long	50 lbs	4.8 mm	75 lbs	10.5"	-	10
CT297HV-50	36" Long	175 lbs	9 mm	175 lbs	10.5"	MS3367-13-0	10
CT40BK-50	40" Long	250 lbs	12.7 mm	250 lbs	11.7"	-	20
CT293	48" Long	175 lbs	9 mm	175 lbs	14.96"	MS3367-16-0	10
CT298B	60" Long	175 lbs	9 mm	175 lbs	20"	-	10

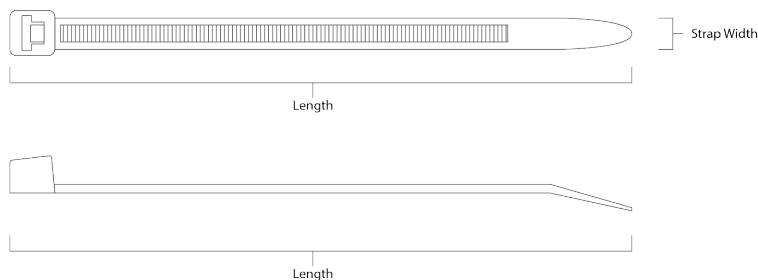

MATERIAL	MIN OPERATING TEMPERATURE	MAX OPERATING TEMPERATURE	UV RESISTANCE	UL FLAME RATING
Nylon 6/6-UV Stabilized	-40°F -40°C	185°F 85°C	Very High	94V-2

GAMMA RADIATION RESISTANCE	MILITARY, FEDERAL, AND ASTM SPECIFICATIONS	TENSILE STRENGTH AT 73°F DRY AS MOLDED ASTM-D-638 (PSI)	OXYGEN INDEX %
1x10 Rads	ASTM-D4066 PA181	12,000	24 -28%

