

KABLE KONTROL

Natural Clear Cable Ties - Nylon 6:6

Description:

Natural cable ties are the ideal option for indoor applications. These cable ties have smooth edges which will not cut your hands when installing them.



Available in various lengths, tensile strengths, and pack quantities



Applications:


Cable ties are ideal for a wide variety of applications such as:

- Electrical Installations
- Cable management
- Automotive
- Securing Bundles
- Landscaping
- Indoor Installations
- Packaging

Certifications:

- UL Listed, File No. E530766 Positioning Device 33AS
- UL Standard UL 62275 TYPE 21S
- RoHS Compliant: RoHS Compliant 2011/65/EU
- AH-2 Plenum Rating

| PART NUMBER | Length | UL Listed Test Strength | Strap Width | Break Strength | Max Bundle Diameter | Mil-Spec | Case QTY |
|----------------|-----------|-------------------------|-------------|----------------|---------------------|-------------|----------|
| CT202 | 4" Long | 18 lbs | 2.5 mm | 18 lbs | 1" | MS3367-4-9 | 40 |
| CT204 | 4" Long | 18 lbs | 2.5 mm | 18 lbs | 1" | MS3367-4-9 | 400 |
| CT102 | 4" Long | 18 lbs | 2.5 mm | 18 lbs | 1" | MS3367-4-9 | 20 |
| CT505-M | 5.5" Long | 18 lbs | 2.5 mm | 18 lbs | 1.12" | - | 30 |
| CT507-NT | 5.5" Long | 40 lbs | 3.5 mm | 40 lbs | 1.12" | MS3367-5-9 | 24 |
| CT295 | 8" Long | 18 lbs | 2.5 mm | 18 lbs | 2.16" | - | 40 |
| CT241 | 8" Long | 40 lbs | 3.5 mm | 40 lbs | 2.16" | - | 17 |
| CT261 | 8" Long | 50 lbs | 4.8 mm | 75 lbs | 2.16" | MS3367-1-9 | 100 |
| CT207 | 8" Long | 50 lbs | 4.8 mm | 75 lbs | 2.16" | MS3367-1-9 | 10 |
| CT269 | 8" Long | 120 lbs | 7.6 mm | 120 lbs | 2.16" | - | 60 |
| CT108 | 9" Long | 250 lbs | 12.7 mm | 250 lbs | 2.3" | - | 20 |
| CT262 | 11" Long | 50 lbs | 4.8 mm | 75 lbs | 3.18" | MS3367-7-9 | 80 |
| CT220 | 11" Long | 50 lbs | 4.8 mm | 75 lbs | 3.18" | MS3367-7-9 | 8 |
| CT270 | 11" Long | 120 lbs | 7.6 mm | 120 lbs | 3.18" | - | 45 |
| CT265 | 14" Long | 50 lbs | 4.8 mm | 75 lbs | 4.01" | MS3367-2-9 | 60 |
| CT271 | 14" Long | 120 lbs | 7.6 mm | 120 lbs | 4.01" | MS3367-3-9 | 35 |
| CT256 | 14" Long | 50 lbs | 4.8 mm | 75 lbs | 4.01" | MS3367-2-9 | 6 |
| CT15NAT | 15" Long | 250 lbs | 12.7 mm | 250 lbs | 4.125" | - | 15 |
| CT7108 | 18" Long | 120 lbs | 7.6 mm | 120 lbs | 4.7" | - | 28 |
| CT19NAT | 19" Long | 250 lbs | 12.7 mm | 250 lbs | 5" | - | 10 |
| CT110 | 22" Long | 250 lbs | 12.7 mm | 250 lbs | 6" | - | 10 |
| CT-24-NU-100PK | 24" Long | 175 lbs | 9 mm | 175 lbs | 6.64" | MS3367-10-9 | 10 |
| CT272 | 28" Long | 175 lbs | 9 mm | 175 lbs | 8.66" | - | 10 |
| CT273 | 32" Long | 175 lbs | 9 mm | 175 lbs | 9.68" | MS3367-12-9 | 10 |
| CT289 | 36" Long | 50 lbs | 4.8 mm | 75 lbs | 10.5" | - | 10 |
| CT297-50 | 36" Long | 175 lbs | 9 mm | 175 lbs | 10.5" | MS3367-13-9 | 10 |
| CT40NAT-50 | 40" Long | 250 lbs | 12.7 mm | 250 lbs | 11.7" | - | 20 |
| CT294 | 48" Long | 175 lbs | 9 mm | 175 lbs | 14.96" | MS3367-16-9 | 10 |
| CT298 | 60" Long | 175 lbs | 9 mm | 175 lbs | 20" | - | 10 |

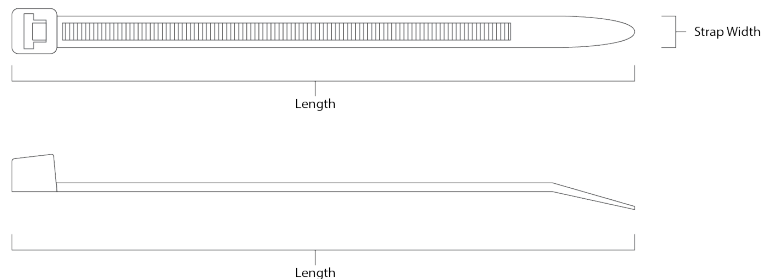

| MATERIAL | MIN OPERATING TEMPERATURE | MAX OPERATING TEMPERATURE | UV RESISTANCE | UL FLAME RATING |
|-----------|---------------------------|---------------------------|---------------|-----------------|
| Nylon 6/6 | -40°F -40°C | 185°F 85°C | None | 94V-2 |

| GAMMA RADIATION RESISTANCE | MILITARY, FEDERAL, AND ASTM SPECIFICATIONS | TENSILE STRENGTH AT 73°F DRY AS MOLDED ASTM-D-638 (PSI) | OXYGEN INDEX % |
|----------------------------|--|---|----------------|
| 1x10 Rads | ASTM-D4066 PA181 | 12,000 | 24 -28% |

