



KABLE KONTROL

Metal Detectable Cable Ties - Nylon 6:6

Description:

Metal detectable cable ties can be used very safely and efficiently in a wide range of indoor as well as outdoor applications. Kable Kontrol metal detector cable ties comply with the food, beverage, and pharmaceutical safety standards as set by the FDA. User-friendly Smooth edges for safe operation and curved. It can be identified by any type of metal detection equipment.

Available in various lengths and tensile strengths. Sold in bags of 100 pieces. Custom configurations upon request.

Custom Marking Compatible



IRON INFUSED NYLON 6-6

Applications:


Metal Detectable cable ties are ideal for a wide variety of applications such as:

- Mounting cables
- Cable management
- Food industry
- Securing Bundles
- Manufacturing
- Pharmaceutical Industry
- Packaging

Certifications:

- UL Listed, File No. E530766 Positioning Device 33AS
- UL Standard UL 62275 TYPE 21S
- FDA 21 CFR 177.1500 (b) Compliance
- REACH, ROHS, PAHS Compliance.

PART NUMBER	BUNDLE DIAMETER		A	B	C	D	E	F	MIN LOOP	
			Length	Strap Width	Thickness	Head Width	Head Thickness	Head Length	Tensile Strength	
	MIN IN	MAX IN	IN	IN	IN	IN	IN	IN	LBS (n)	Case QTY (pack per carton)
CTMD40-18-BLUE	0.12"	0.81"	3.94"	0.04"	0.10"	0.18"	0.16"	0.19"	18 (80)	400
CTMD-800-40-BLUE	0.14"	2.07"	7.87"	0.05"	0.14"	0.25"	0.19"	0.24"	40 (177)	130
CTMD800-50-BLUE	0.14"	1.95"	7.87"	0.05"	0.19"	0.32"	0.22"	0.31"	50 (222)	100
CTMD1100-50-BLUE	0.14"	3.19"	11.81"	0.05"	0.19"	0.32"	0.22"	0.31"	50 (222)	65
CTMD1400-50-BLUE	0.14"	4.07"	14.57"	0.05"	0.19"	0.32"	0.22"	0.31"	50 (222)	52

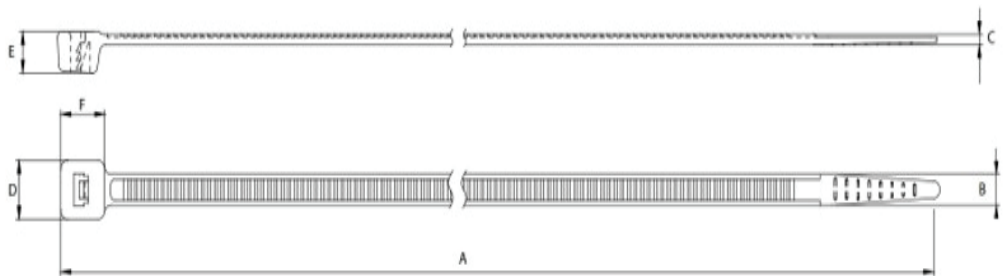

MATERIAL	MIN OPERATING TEMPERATURE	MAX OPERATING TEMPERATURE	UV RESISTANCE	UL FLAME RATING	PLENUM RATING
Nylon 6/6 Impregnated With Magnetite	-40°F -40°C	185°F 85°C	None	94V-2	N/A



www.kablekontrol.com