



KABLE KONTROL

Screw Hole Mount Cable Ties - Nylon 6:6

Description:

Screw Hole Mount Cable Ties allow you to attach your secured cable bundle to any surface you desire – communication racks, walls, or ceilings. These cable ties with screw holes allow for quick permanent mounting installation. Only black nylon mount head cable ties are UV resistant. The curved tip makes it easier to do the beginning threading which allows for an easy and quick installation.

Available in various lengths and, tensile strengths. Available in bags of 100
Available in black and natural.

**Custom Marking
Compatible** 



Part Number	Length	Tensile Strength	Strap Width	Max Bundle Diameter	Screw Hole Diameter	Case Quantity
MHT5-40-BLACK	5" Long	40 lbs	0.18" (4.52 mm)	1.3" (33.02 mm)	0.13" (3.2 mm)	150
MHT7-50-BLACK	7" Long	50 lbs	0.18" (4.52 mm)	1.8" (45.72 mm)	0.15" (4.0 mm)	80
MHT11-50-BLACK	11" Long	50 lbs	0.18" (4.52 mm)	3" (76.2 mm)	0.18" (4.8 mm)	65
MHT14-50-BLACK	14" Long	50 lbs	0.18" (4.52 mm)	4" (101.6 mm)	0.18" (4.8 mm)	50
MHT14-120-BLACK	14" Long	120 lbs	0.3" (7.62 mm)	4" (101.6 mm)	0.23" (6.0 mm)	20
MHT5-40-Natural	5" Long	40 lbs	0.18" (4.52 mm)	1.3" (33.02 mm)	0.13" (3.2 mm)	150
MHT7-50-Natural	7" Long	50 lbs	0.18" (4.52 mm)	1.8" (45.72 mm)	0.15" (4.0 mm)	80
MHT11-50-Natural	11" Long	50 lbs	0.18" (4.52 mm)	3" (76.2 mm)	0.18" (4.8 mm)	65
MHT14-50-Natural	14" Long	50 lbs	0.18" (4.52 mm)	4" (101.6 mm)	0.18" (4.8 mm)	50
MHT14-120-Natural	14" Long	120 lbs	0.3" (7.62 mm)	4" (101.6 mm)	0.23" (6.0 mm)	20


Applications:

Screw mount cable ties are ideal for a wide variety of applications such as:

- Mounting cables
- Cable management
- Automotive
- Securing Bundles
- Landscaping
- Outdoor Installations with black ties
- Packaging

Certifications:

- UL Listed, File No. E530766
Positioning Device 33AS
- UL Standard UL 62275 TYPE 21S
- RoHS Compliant: RoHS Compliant
2011/65/EU
- AH-2 Plenum Rating

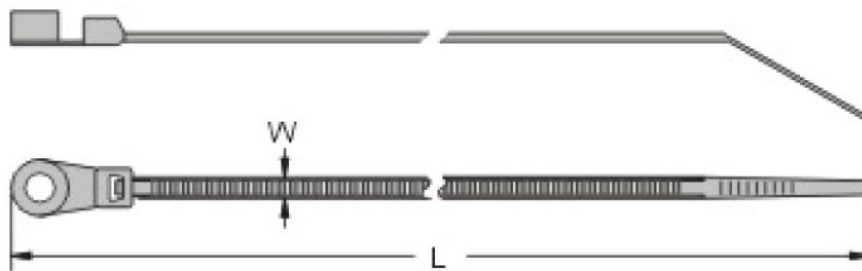

MATERIAL	MIN OPERATING TEMPERATURE	MAX OPERATING TEMPERATURE	UV RESISTANCE	UL FLAME RATING
Nylon 6/6- Natural	-40°F -40°C	185°F 85°C	None	94V-2
Nylon 6/6- UV Stabilized Black	-40°F -40°C	185°F 85°C	Very High	94V-2

