

# KABLE KONTROL

## Stainless Steel Cable Ties - 304 Steel

### Description:

Stainless Steel Cable Ties are ideal for bundling wires or hoses in demanding applications where corrosion, vibration, general weathering, radiation, and temperature extremes are a concern. Made with Flame retardant Grade 304 stainless steel. These metal cable ties are designed with an easy-to-install, low-profile, self-locking ball bearing head.



Available in various lengths, tensile strengths, and pack quantities. Custom configurations upon request.

**Custom Marking Compatible** 



Part Number	Length	Min. Tensile Strength	Strap Width	Max Bundle Diameter	Head Width	Package Qty	Case Quantity
SSCT05	5.0" (127 mm)	200 lbs	0.18" (4.6 mm)	1" (25.4 mm)	0.26" (6.5 mm)	100	50
SSCT08	8.0" (203 mm)	200 lbs	0.18" (4.6 mm)	2" (50.8 mm)	0.26" (6.5 mm)	100	50
SSCT11	11.0" (279 mm)	200 lbs	0.18" (4.6 mm)	2.7" (50.8 mm)	0.26" (6.5 mm)	100	30
SSCT15	15.0" (363 mm)	200 lbs	0.18" (4.6 mm)	4" (102 mm)	0.26" (6.5 mm)	100	25
SSCT21	21.0" (521 mm)	200 lbs	0.18" (4.6 mm)	6" (152 mm)	0.26" (6.5 mm)	100	25
SSCT27	27.0" (681 mm)	200 lbs	0.18" (4.6 mm)	8" (203 mm)	0.26" (6.5 mm)	100	25
SSCT33	33.0" (838 mm)	200 lbs	0.18" (4.6 mm)	10" (254 mm)	0.26" (6.5 mm)	100	25
SSCT-250-8	8.0" (203 mm)	350 lbs	0.312" (7.9 mm)	2" (50.8 mm)	0.437" (11 mm)	100	30
SSCT-250-11	11.0" (279 mm)	350 lbs	0.312" (7.9 mm)	2.7" (50.8 mm)	0.437" (11 mm)	100	25
SSCT-250-15	15.0" (363 mm)	350 lbs	0.312" (7.9 mm)	4" (102 mm)	0.437" (11 mm)	100	25
SSCT-485-27	27.0" (681 mm)	485 lbs	0.50" (12.7 mm)	8" (203 mm)	0.625" (12.7 mm)	50	10


### Applications:

Stainless Steel Cable ties are ideal for a wide variety of applications such as:

- Extreme conditions
- Cable management
- Corrosive Environments
- Securing Bundles
- Transportation and Automotive
- Indoor and Outdoor Installations
- Underground Installations

### Certifications:

- UL Listed, File No. E530766  
Positioning Device 33AS
- UL Standard UL 62275 TYPE 21S
- RoHS Compliant: RoHS Compliant  
2011/65/EU

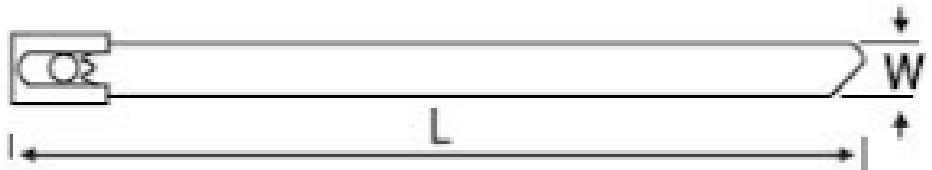

MATERIAL	MIN OPERATING TEMPERATURE	MAX OPERATING TEMPERATURE	UV RESISTANCE	Flammability	Chemical Resistance
304 Stainless Steel	-112°F -80°C	1000°F 538°C	Excellent	Non-Flammable	Excellent

