



### Aim

■ F0090009 - White

Designed by Ronan & Erwan Bouroullec

Suspended light fitting. Body in varnished aluminium sheet, shade in photo-etched optical polycarbonate. Internal reflector in photo-etched ABS. Orientable body. Powered directly from mains. The LED can be dimmed with a «Triac for Led» dimmer approved by Flos. Flos does not respond in case of wrong electrical connection system installations. The cable has a useful length of 9 meters and thus the lamp can be suspended 3 meters from the ceiling. Multiple rose with capacity to connect up to 5 Aims also available.

### Main specifications



<b>Mounting</b>	Suspension	<b>Lamp holder</b>	LED Module
<b>Environment</b>	Indoor dry location	<b>Autoprotected Lamp</b>	No
<b>Light source type</b>	LED	<b>Number of heads</b>	1
<b>Light source replaceable</b>	Replaceable (LED only) light source by a professional	<b>Source Power (W)</b>	16
	LED Module	<b>System Flux (lm)</b>	895



### LED type

### Optical

<b>Lighting Type</b>	Direct
<b>Lighting distribution</b>	Roto symmetric
<b>CCT (K)</b>	2700K
<b>Cold Beam Lighting</b>	No
<b>Extreme Cut off</b>	No

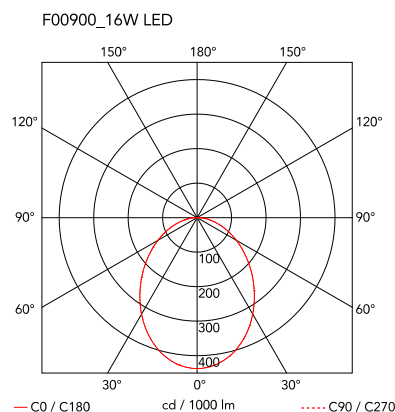

### Electrical

<b>Insulation class</b>	II	<b>Batteries Inside</b>	No
<b>Frequency (Hz)</b>	50/60	<b>Cord length (mm)</b>	9000/3000
<b>Main Voltage (Vac)</b>	220-240	<b>Charging Min Time</b>	No
<b>Driver</b>	Integrated		
<b>Dimmable type</b>	Mains Cut Dimming		

### Physical

<b>Colour</b>	White
<b>Net weight (kg)</b>	3.2
<b>Gross weight (kg)</b>	7.06
<b>IP</b>	20
<b>IP external</b>	20



## Aim



**Aim Canopy**  
F0093009



**Aim Dimmer**  
RF22227