



Apparecchio bidirezionale di potenza per esterni da parete. Corpo quadrato in alluminio estruso con frontale in vetro. Fissaggio a parete con apposita staffa. L'innovativo sistema di montaggio, tramite l'utilizzo di colle ad altissima tenuta, permette l'eliminazione delle viti, rendendo il prodotto pulito ed elegante. Disponibile con 2 LED COB di potenza 10W in varie tonalità di bianco e in varie finiture da abbinare al contesto. Ideale per illuminazione di pareti.

Disegno tecnico


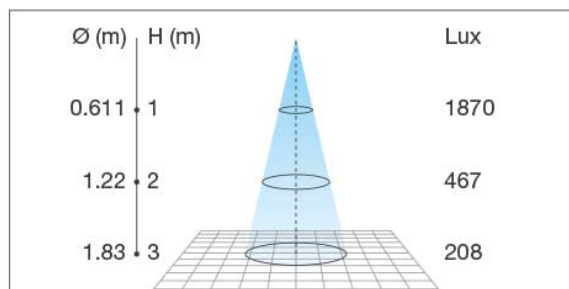


Diagramma a coni




















Diagramma a coni rilevato con LED COB, lente 45°, bianco naturale.

Cone diagram measured with natural white, COB LED, lens 45°.



Modelli

Codice	Finitura	Alimentatore Input	Numero Led	Colore Luce	Gradi Lente	Lumen Max	Potenza Max
PH04S10W1A6A	Bianco	230Vac	2		15°		10W

PH04S10W1A6B	Grigio RAL9006	230Vac	2		15°	10W
PH04S10W1A6M	Cor-Ten	230Vac	2		15°	10W
PH04S10W1A6N	Grigio Scuro RAL7043	230Vac	2		15°	10W
PH04S10W1B6A	Bianco	230Vac	2		45°	10W
PH04S10W1B6B	Grigio RAL9006	230Vac	2		45°	10W
PH04S10W1B6M	Cor-Ten	230Vac	2		45°	10W
PH04S10W1B6N	Grigio Scuro RAL7043	230Vac	2		45°	10W
PH04S10W1D6A	Bianco	230Vac	2		120°	10W
PH04S10W1D6B	Grigio RAL9006	230Vac	2		120°	10W
PH04S10W1D6M	Cor-Ten	230Vac	2		120°	10W
PH04S10W1D6N	Grigio Scuro RAL7043	230Vac	2		120°	10W
PH04S10W1G6A	Bianco	230Vac	2		08°	9W
PH04S10W1G6B	Grigio RAL9006	230Vac	2		08°	9W
PH04S10W1G6M	Cor-Ten	230Vac	2		08°	9W
PH04S10W1G6N	Grigio Scuro RAL7043	230Vac	2		08°	9W
PH04S10W1T6A	Bianco	230Vac	2		25°	10W
PH04S10W1T6B	Grigio RAL9006	230Vac	2		25°	10W
PH04S10W1T6M	Cor-Ten	230Vac	2		25°	10W
PH04S10W1T6N	Grigio Scuro RAL7043	230Vac	2		25°	10W
PH04S10W2A6A	Bianco	230Vac	2		15°	10W
PH04S10W2A6B	Grigio RAL9006	230Vac	2		15°	10W
PH04S10W2A6M	Cor-Ten	230Vac	2		15°	10W
PH04S10W2A6N	Grigio Scuro RAL7043	230Vac	2		15°	10W
PH04S10W2B6A	Bianco	230Vac	2		45°	10W
PH04S10W2B6B	Grigio RAL9006	230Vac	2		45°	10W
PH04S10W2B6M	Cor-Ten	230Vac	2		45°	10W
PH04S10W2B6N	Grigio Scuro RAL7043	230Vac	2		45°	10W
PH04S10W2D6A	Bianco	230Vac	2		120°	10W
PH04S10W2D6B	Grigio RAL9006	230Vac	2		120°	10W

PH04S10W2D6M	Cor-Ten	230Vac	2	F	120°	10W
PH04S10W2D6N	Grigio Scuro RAL7043	230Vac	2	F	120°	10W
PH04S10W2G6A	Bianco	230Vac	2	N	08°	9W
PH04S10W2G6B	Grigio RAL9006	230Vac	2	N	08°	9W
PH04S10W2G6M	Cor-Ten	230Vac	2	N	08°	9W
PH04S10W2G6N	Grigio Scuro RAL7043	230Vac	2	N	08°	9W
PH04S10W2T6A	Bianco	230Vac	2	F	25°	10W
PH04S10W2T6B	Grigio RAL9006	230Vac	2	F	25°	10W
PH04S10W2T6M	Cor-Ten	230Vac	2	F	25°	10W
PH04S10W2T6N	Grigio Scuro RAL7043	230Vac	2	F	25°	10W
PH04S10W9A6A	Bianco	230Vac	2	N	15°	10W
PH04S10W9A6B	Grigio RAL9006	230Vac	2	N	15°	10W
PH04S10W9A6M	Cor-Ten	230Vac	2	N	15°	10W
PH04S10W9A6N	Grigio Scuro RAL7043	230Vac	2	N	15°	10W
PH04S10W9B6A	Bianco	230Vac	2	N	45°	10W
PH04S10W9B6B	Grigio RAL9006	230Vac	2	N	45°	10W
PH04S10W9B6M	Cor-Ten	230Vac	2	N	45°	10W
PH04S10W9B6N	Grigio Scuro RAL7043	230Vac	2	N	45°	10W
PH04S10W9D6A	Bianco	230Vac	2	N	120°	10W
PH04S10W9D6B	Grigio RAL9006	230Vac	2	N	120°	10W
PH04S10W9D6M	Cor-Ten	230Vac	2	N	120°	10W
PH04S10W9D6N	Grigio Scuro RAL7043	230Vac	2	N	120°	10W
PH04S10W9G6A	Bianco	230Vac	2	N	08°	9W
PH04S10W9G6B	Grigio RAL9006	230Vac	2	N	08°	9W
PH04S10W9G6M	Cor-Ten	230Vac	2	N	08°	9W
PH04S10W9G6N	Grigio Scuro RAL7043	230Vac	2	N	08°	9W
PH04S10W9T6A	Bianco	230Vac	2	N	25°	10W
PH04S10W9T6B	Grigio RAL9006	230Vac	2	N	25°	10W
PH04S10W9T6M	Cor-Ten	230Vac	2	N	25°	10W

PH04S10W9T6N	Grigio Scuro RAL7043	230Vac	2		25°	10W
PH04SCUSTOM	Bianco	230Vac	2		45°	10W