

Commercial Tapware



CLEANAJET®
STAINLESS STEEL

Compact Exposed Wall Mount Pre-Rinse Unit with Pot Filler




T-3M53449-C – 6" pot filler

T-3M53473-C – 12" pot filler


- Full S/S construction
- Compact model designed for applications where space saving is a priority
- Equipped with a water saving 6 star 4.5LPM variable trigger valve
- Wall bracket included
- Available with 6" or 12" pot filler – 4 star 7.5LPM
- Fully assembled and bench tested, with a unique traceable serial number
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 80 degrees

Top

Set-Out 205
Min 195 - Max 215

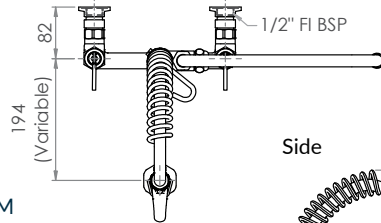

Side

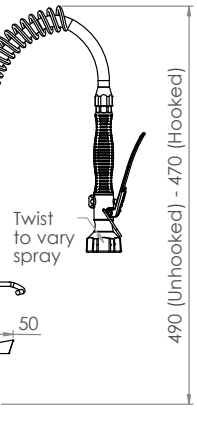

Front

