3130709 1.0

GENERATION LIGHTING

Chandelier

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°c supply conductors.

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077 800.969.3347


www.generationlighting.com

© 2020 Generation Lighting. All rights reserved. The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

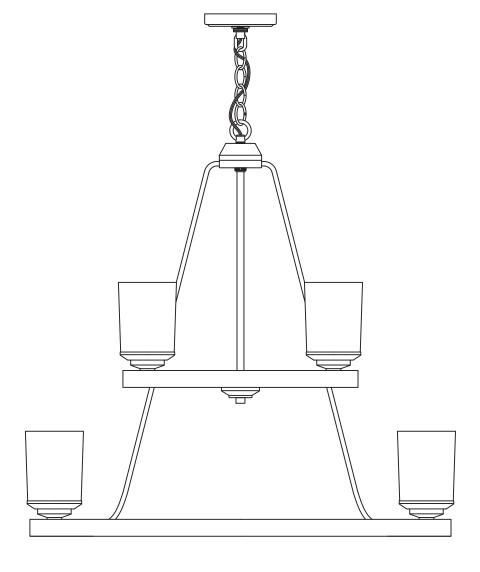

SAVETHESE INSTRUCTIONS!

Install the Fixture

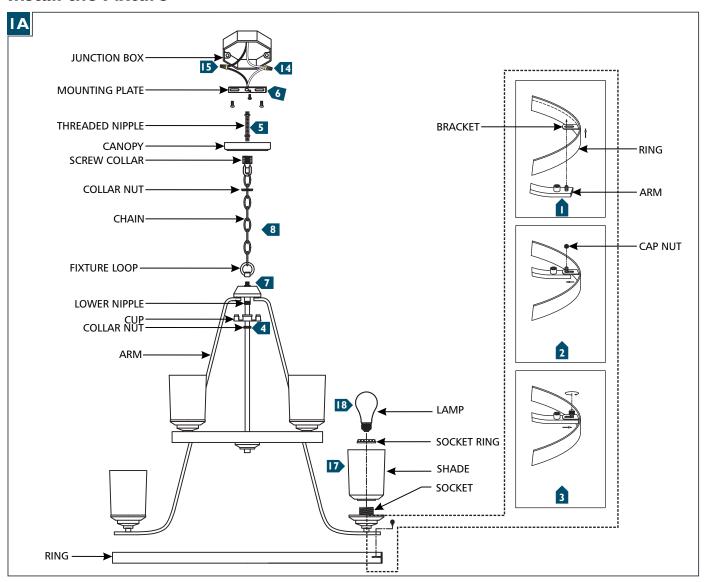

- Align the stud on the arm with the bracket hole on the ring.
- 2 Pull the arm towards the center of the fixture and thread the cap nut without tightening it.
- Push the arm towards the ring then tighten the cap nut.
- 4 Align the cup with the lower nipple and secure in place with the collar nut.
- If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
- 6 Secure the mounting plate to the junction box.
- Feed the cord from the fixture through the upper cap and fixture loop assembly and screw them together.
- B Determine the wanted height of the fixture and remove a portion of the chain by opening a link with pliers.
- Open the chain link with pliers and install the chain on the fixture loop, then re-close the chain link.
- Unscrew the collar nut from the screw collar, install the collar nut and the canopy onto the chain (in that order).
- Open a link on the other end of the chain with pliers and install the chain onto the screw collar to secure the fixture, re-close the link.
- Weave the cord through the chain, canopy, collar nut, screw collar, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- Connect the fixture to a suitable ground in accordance to local electrical codes.
- Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
- Place the shade base, shade over the socket and secure in place with the socket ring.
- Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.