GENERATION LIGHTING

CHANDELIER

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077 800.969.3347


www.generationlighting.com

© 2020 Generation Lighting. All rights reserved. The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

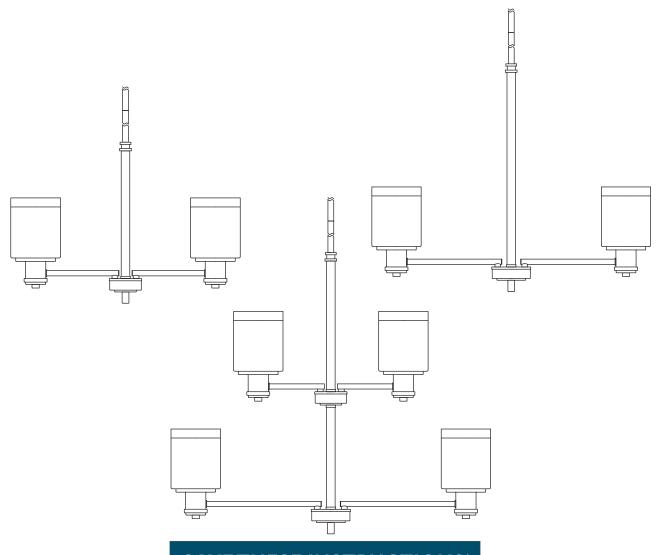

SAVETHESE INSTRUCTIONS!

Install the Fixture

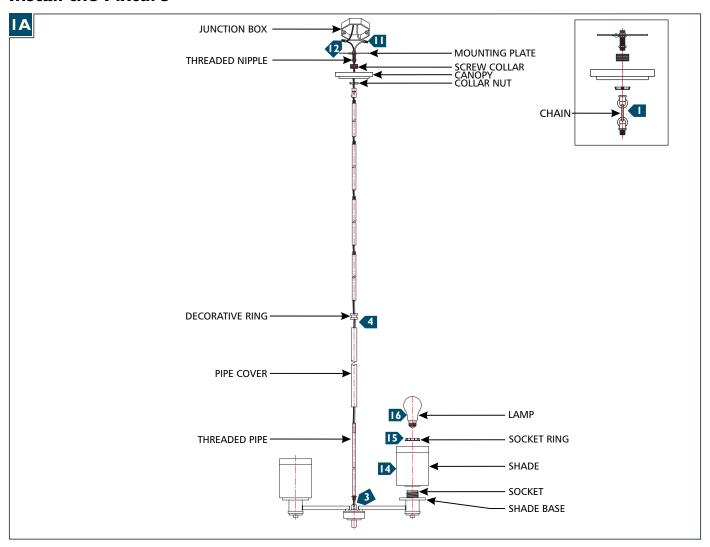

- Determine the wanted height or look of the fixture with the provided swivel, stems, and chain and assemble them by screwing them together. All the parts may be used alone or used in combination.
- 2 Secure the mounting plate to the junction box.
- Insert the threaded pipe into the pipe cover, then feed fixture wires through the pipe and screw it onto the top of the fixture.
- Feed the fixture wires through the decorative ring.
- Feed the fixture wired through the stem assembly and screw the stem assembly to the threaded pipe.
- 6 Unscrew the collar nut from the screw collar, install the collar nut and the canopy onto the stem assembly (in that order).
- Weave the cord through the stems, chain, collar nut, canopy, screw collar, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 8 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 9 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- Neatly place all the wires into the junction box, place the canopy onto the mounting studs, and secure it in place by screwing the cap nuts onto the studs.
- Place the shade over the socket and into the shade base.
- Secure the shade with the socket ring. Repeat for remaining shades.
- Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.