


ARTERIORS

Padma Sconce

#DS49016

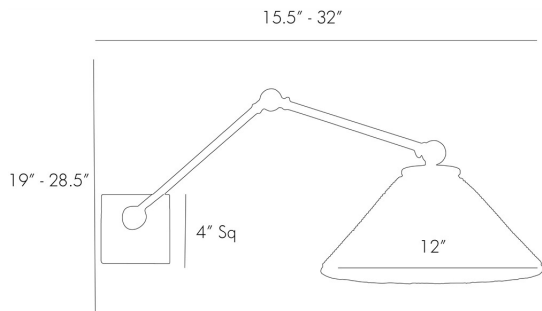

Our versatile, articulating wall light dons a woven wicker shade for a fun, textural mix. Finished in antique brass, it's useful as a reading lamp, picture light or, as Windsor uses in her own home, as accent lighting over bookcases. Shown with a 3 3/8" frosted globe bulb.

APPEARANCE

Installation Environment:	Residential
Arm Finish:	Antique Brass
Appearance Finish:	Antique Brass
Finish 1:	Natural
Primary Material:	Steel
Material 1:	Rattan
Finish will vary:	No
Arm Material:	Steel
Backplate Finish:	Antique Brass
Backplate Material:	Steel
Installation Environment 1:	Contract
	Suitable
Top Coat/Sealant:	Yes

CERT

*Approved for Australia:	No
*Approved for Belarus:	No
Approved for Canada:	Yes
*CB Certified:	No
*Approved for European Union:	No
*Approved for Kuwait:	No
*Approved for Kazakhstan:	No
Approved for Mexico:	Yes

MARKET

Designer:	Windsor Smith
Web/Marketing Description:	Our versatile, articulating wall light dons a woven wicker shade for a fun, textural mix. Finished in antique brass, it's useful as a reading lamp, picture light or, as Windsor uses in her own home, as accent lighting over bookcases. Shown with a 3 3/8" frosted globe bulb.
Web/Marketing Description Ext:	

SHADE

Shade Diffuser (Y/N):	No
-----------------------	----

*Approved for New Zealand: No
*Approved for Russian Federati: No
*Approved for Saudi Arabia: No

Shade Bottom Diameter: 12
Shade Side: 5.5
Shade Top Diameter: 3.5

DIMENSION

Overall Adjustable Depth: 0cm - 0cm
Overall Dimension W: 30.48cm
Wall Sconce Adjustable: No
Overall Adjustable Height: 0cm - 0cm
Backplate D: 2.54cm
Backplate H: 11.43cm
Backplate W: 11.43cm

INFO

Intro Date: 10/01/16
Show on Price List: Yes
Show on Web: Yes
Assembly Required: No
Size will vary: No

SHIPPING

Gross Weight (e-ship): 6.6
Net Weight: 3
Truck Ship: No

WIRING

ADA Approved: No
Bulb: A19
Incandescent
Cord Color: Black
Cord Length (Exit): 4
Damp Rated - Covered: Damp Rated
Plug: Hardwired
RoHS: Yes
Socket Quantity: 01
Socket Type: Type A- E26,
Uno
Socket Wattage: 40
UL/cUL Approved: Yes
Voltage: 110-120 Volt