GENERATION LIGHTING

WALL

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

SAVE THESE INSTRUCTIONS!

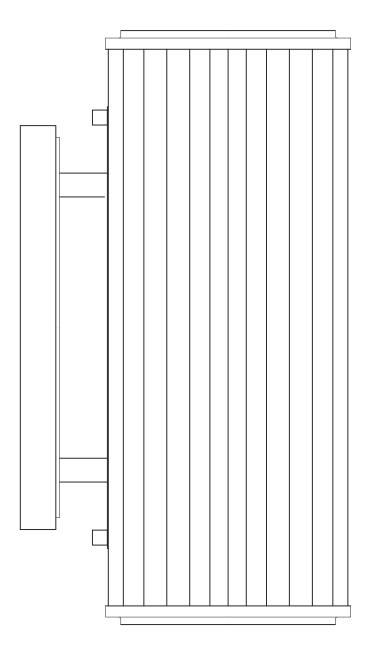


GENERATION LIGHTING

7400 Linder Ave., Skokie, IL 60077 T 847.410.4400 | F 847.410.4500

VISUAL COMFORT & CO.

Install the Fixture

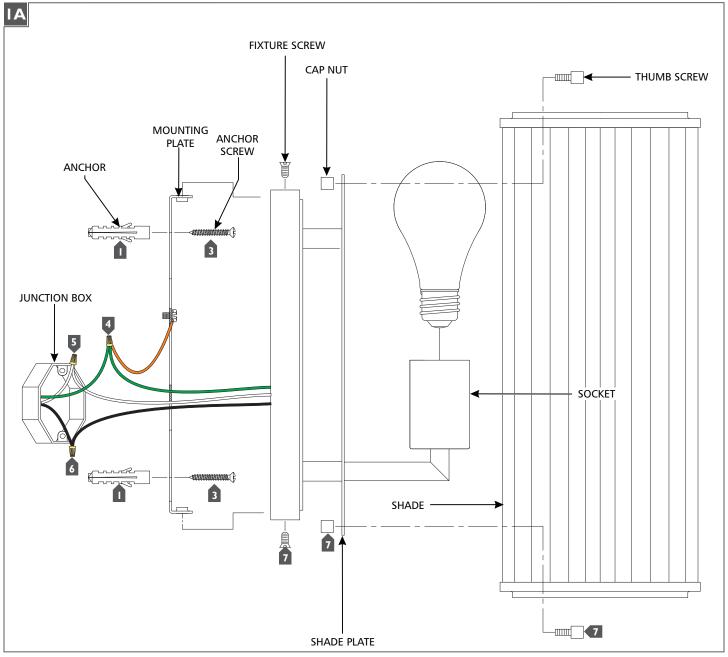

- I Temporarily secure the mounting plate to the junction box and mark the location of the anchors, then remove the mounting plate.
- 2 Drill appropriate sized holes at the marked locations and install the anchors.
- 3 Secure the mounting plate to the junction box and screw the anchor screws through the anchors.
- 4 Connect the fixture to a suitable ground in accordance with local electrical codes.
- Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 6 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place using the fixture screw.
- Screw the lamp into the socket. Refer to the label on the lamp socket for Max Wattage Information.
- Install the shade by placing it over the socket then inserting thumb screws through the shade and shade plate. Secure the thumb screws with the cap nuts.