


Precision Small Cylinder Pendant

Item # KW 5224

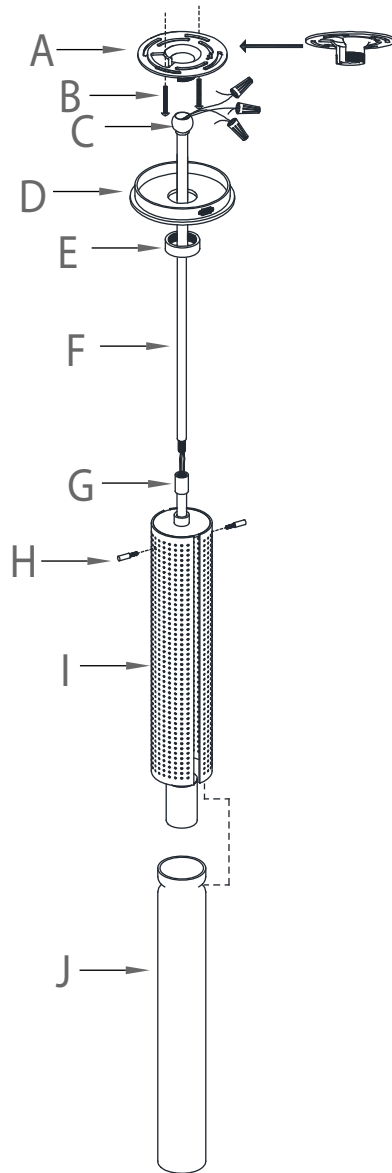

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Carefully remove all parts from the carton.
2. Remove mounting plate (A) from canopy (D) by removing collar ring (E).
3. Affix mounting plate (A) to ceiling outlet box with mounting screws (B) provided.
4. Feed wire through rod (F) and come out from the swivel ball (C).
5. Thread the nipple of rod (F) into the Joint (G) by turning in a clockwise direction until tight.
6. Slide canopy ring (E) and canopy (D) on pole (F).
7. Hook the swivel ball (C) to the mounting loop on mounting plate (A) for hanging the light fixture.
8. Attach the bare copper ground wire from the fixture to the ground junction box wire (usually green or copper), fasten both wires together with a plastic wire connector. Tightly wrap the wire connector with electrical tape. Be sure no wire strands are exposed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
9. Connect neutral wire from fixture (ribbed molded wire) to the neutral wire from the junction box (usually white) . Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape. Be sure no wire strands are exposed.
10. Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten both wires together with a plastic wire connector and wrap the connection with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
11. Tuck wire connections neatly into ceiling outlet box.
12. Attach canopy (D) flush to the affixed mounting plate (A) and secure with collar ring (E).
13. Raise up the cage (I), insert light bulb (not included) into socket and then gently put down the cage.
14. Loosen bolts (H), attach glass shade (J) into cage (I) and secure with bolts (H). NOTE: DO NOT OVERTIGHTEN, OTHERWISE THE GLASS WILL BE DAMAGED.
15. Installation is complete. Restore power and test fixture.

*** Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.