



## ASSEMBLY INSTRUCTIONS

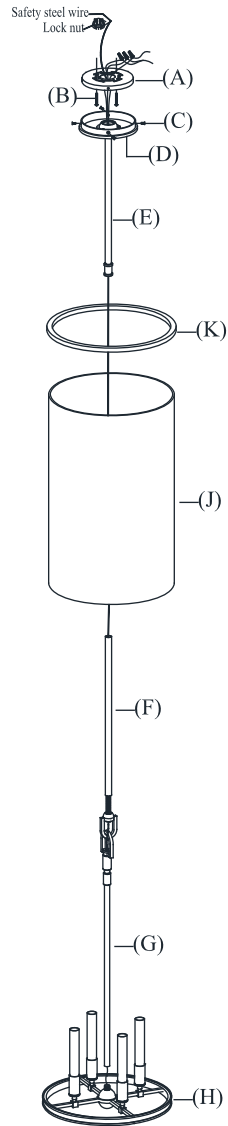

### Illustration A:



#### To install safety cables:

1. Thread safety steel wire into slot on mounting plate (A).
2. Wrap the safety steel wire around the lock nut (a).  
Note: Length of safety steel wire must be shorter than fixture wires (White/black/green wires).
3. Insert clip (b) into both holes on lock nut (a), secure with nuts (c).
4. Push the lock nut into outlet box.

## Modern Large Lantern

Item # RL 5177


### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.


1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Thread pole (G) onto the center nipple of part (H).
3. Insert light bulbs (not included) into the sockets.
4. Insert glass cylinder (J) into the ring of part (H).
5. Place ring (K) onto the top of glass shade (J).
6. Thread pole (E) onto the inner rod of pole (F).
7. Feed wires through poles (G), (F) and (E).
8. Remove mounting plate (A) from fixture base (D) by unscrewing base screws (C).
9. Affix mounting plate (A) onto ceiling outlet box and secure with mounting screws (B).
10. Attach fixture steel safety cable to structural member in the ceiling. (As shown in illustration A)
11. Attach the bare copper ground from the fixture to the ground junction box wire (usually green or copper), fasten together with a plastic wire connector. Tighten wrap the wire connector with electrical tape. Be sure no wire strands are exposed.  
IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
12. Connect neutral wire from fixture (ridges molded wire) to the neutral wire from the junction box (usually white). Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape. Be sure no wire strands are exposed.

# RALPH LAUREN

## ASSEMBLY INSTRUCTIONS

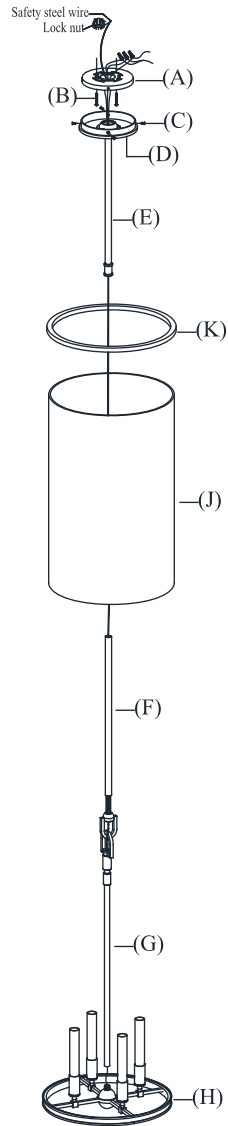

### Illustration A:



#### To install safety cables:

1. Thread safety steel wire into slot on mounting plate (A).
2. Wrap the safety steel wire around the lock nut (a).  
Note: Length of safety steel wire must be shorter than fixture wires (White/black/green wires).
3. Insert clip (b) into both holes on lock nut (a), secure with nuts (c).
4. Push the lock nut into outlet box.

## Modern Large Lantern

Item # RL 5177

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

13. Connect the hot wires from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connector and wrap the connection with electrical tape. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.**
14. Tuck wire connections neatly into ceiling outlet box.
15. Attach fixture base (D) to the affixed mounting plate (A), align the holes on the side, insert base screws (C) into the holes to secure the fixture base (D) to the mounting plate (A).
16. Restore power and test fixture. Installation is complete.

**Care Instructions:** Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

# RALPH LAUREN

