

The uniquely modern Revel outdoor path light features a sleek metal surface that is laser-cut with horizontal slots which allow the LED light to shine through an inner white diffuser. The subtle, ambient glow enhances wayfinding on paths or in landscape applications.

### Outstanding protection against the elements:

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

### Path light features either Bolt or Stake mounting options

## SPECIFICATIONS

DELIVERED LUMENS	122.1
WATTS	17.6
VOLTAGE	12V (Transformer sold separately)
DIMMING	MLV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Bolt or Stake
PERFORMANCE OPTIONS	N/A
CCT	3000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B0-U2-G0
DARK SKY	Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; >60,000 Hours
WARRANTY*	5 Years
WEIGHT	3.3 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



REVEL PATH  
shown in bronze



REVEL PATH  
shown in charcoal

### 12V AC TRANSFORMERS\*


(OUTDOOR RATED, ORDERED SEPARATELY)

ITEM	DESCRIPTION	HOUSING	DIMMING
<b>7000T150T</b>	MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
<b>7000T300T</b>	MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC

## ORDERING INFORMATION

PRODUCT	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
<b>7000ARVL</b>	<b>830</b> 80 CRI, 3000K	<b>8</b> 8"	<b>D</b> DIFFUSE	<b>Z</b> BRONZE <b>H</b> CHARCOAL	<b>12</b> 12V	<b>S</b> SYMMETRIC	CONCRETE MOUNT <b>ST</b> STAKE MOUNTING KIT

\*REQUIRES 12V REMOTE TRANSFORMER

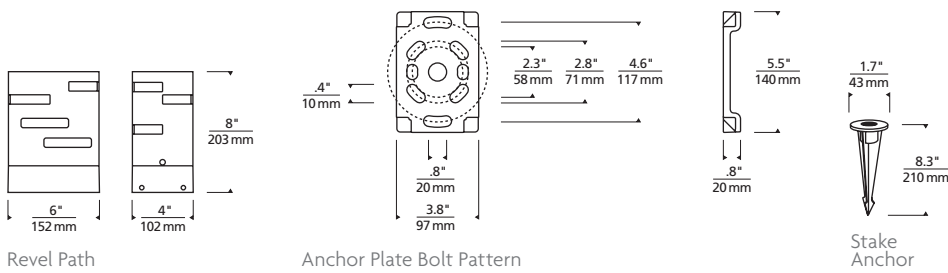


## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### REVEL PATH

Total Lumen Output: 122.1  
 Total Power: 17.6  
 Luminaire Efficacy: 6.9  
 Color Temp: 3000K  
 CRI: 80+  
 BUG Rating: B0-U2-G0

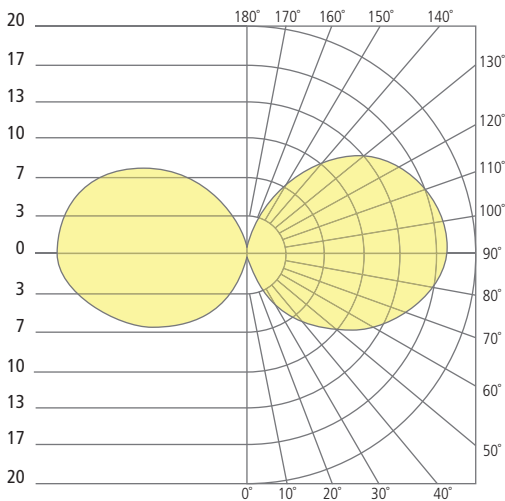

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---