


The Ladder to Roof Access Point provides permanent fall protection, a controlled access zone, and safer step-on and step-off for both temporary and fixed ladder points. "Zero Penetration" attachment will not damage the roof or flashings, prevents moisture from entering the building, and will not void the roof warranty. Each unit features patented GrabSafe™ handholds, providing 3-point control during ladder step-on and step-off, and self-closing gate.

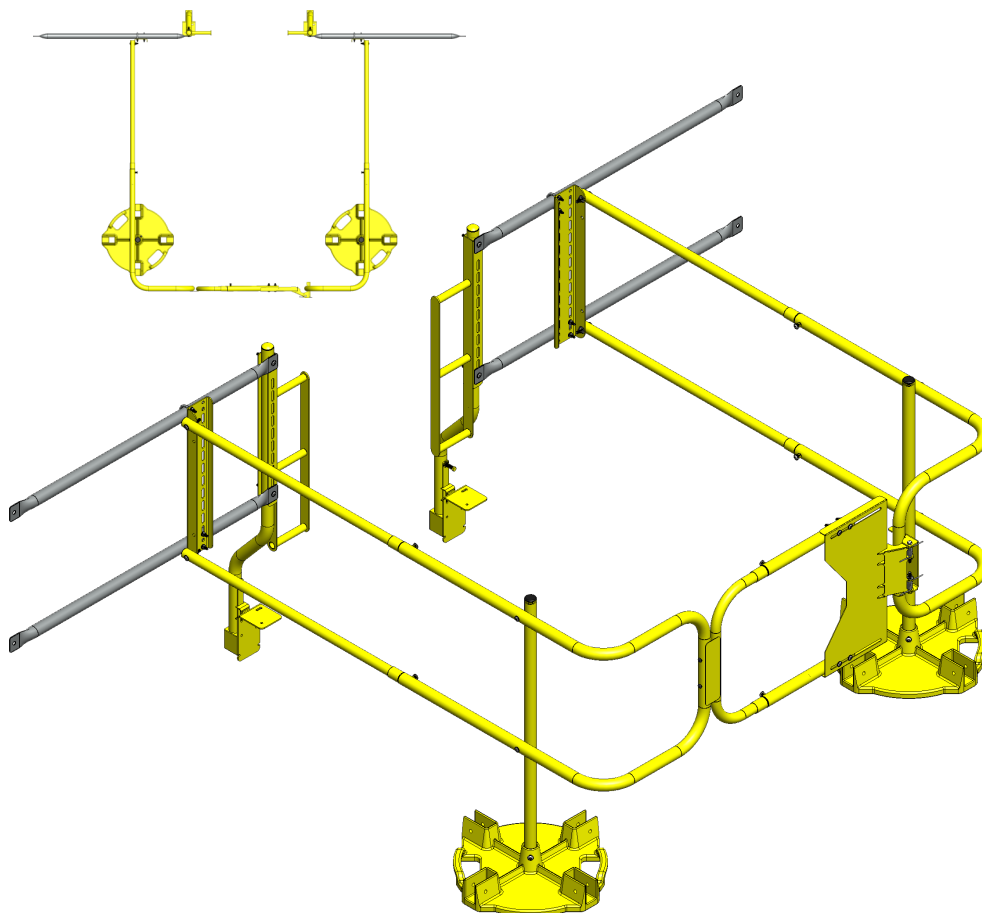

KEY FEATURES

- Permanent and compliant controlled access zone.
- Easy to install
- Self-closing gate
- GrabSafe™ handholds for maximum Safety
- Safe landing area created by rail Extensions
- "Zero Penetration" attachment
- Improved egress and ingress
- Powder coated steel or Hot-Dipped Galvanized
- Made in the U.S.A.
- Meets and Exceeds:
  - OSHA 29 CFR 1926.501
  - OSHA 29 CFR 1926.502
  - OSHA 29 CFR 1910.23
  - Cal-OSHA §1620
  - Cal-OSHA §3209
  - Cal-OSHA §3212
  - ANSI/ASEE A1264.1-2007
  - USACE EM 385-1-1 (21.E.01 a-c)

**Product Name:** Ladder to Roof Access Point

**Product Description:** Ladder to Roof Access Point provides permanent fall protection, a controlled access zone, and safer step-on and step-off for both temporary and fixed ladder points. Each unit features patented GrabSafe™ handholds and self-closing gate to ensure a safe controlled access zone at the ladder.

**Applications:** The PRS Ladder to Roof Access Point provides fall protection and a controlled access zone at ladder points around the roof.

**Installation:** Ladder to Roof Access Point can be installed at both new and existing ladder points without penetrating the roof membrane and mounted under the outside perimeter sheet metal detail.

**New Construction:** Coping Caps, gravel stops, drip edges and most commercial gutters.

**Retrofit:** Coping caps, gravel stops, drip edges and commercial gutter retrofit is recommended during roof replacement, however, system can be retrofit with existing perimeter roof details.

**Materials:**

**Uprights:** 1.625" x .065" (ASTM C1008/1010) steel tube

**Bases:** 23" x 23" Cast 35 Gray Iron

**Horizontal Rails:** 1.625" x .065" (ASTM C1008/1010) and 1.375" x .065" (ASTM C1008/1010) steel tube adjustable slide rails.

**GrabSafe™:** 1" x 5.5" steel tube (ASTM A513) welded to 10 gauge steel (ASTM A1011 CS Type B) bracket.

**Self-Closing Gate:** 1.625" x .065" steel tube (ASTM C1008/1010), 16 gauge steel plate (ASTM A1008 CS Type B)

**Finish:**

**Uprights & Rails:** Powder coat or Hot-Dipped Galvanized to ASTM A123.

**Bases:** Galvanized

**Colors:** Numerous colors to match Kynar® sheet metal, building components and RAL colors.

**Hardware:** 3/8"-16 x 1" zinc plated steel.

**Labels:** Applicable safety warnings and manufacturer's contact information.

**Sizes:** 5'-6" w x 4'-8" to 6'-11" adjustable

**Weight:** 230 lbs

**Warranty:** 1 year manufacturer's limited warranty covering manufacturing defects.

**Country of Origin:** United States of America

AutoCAD details and specifications available at [www.LeadingEdgeSafety.net](http://www.LeadingEdgeSafety.net)