
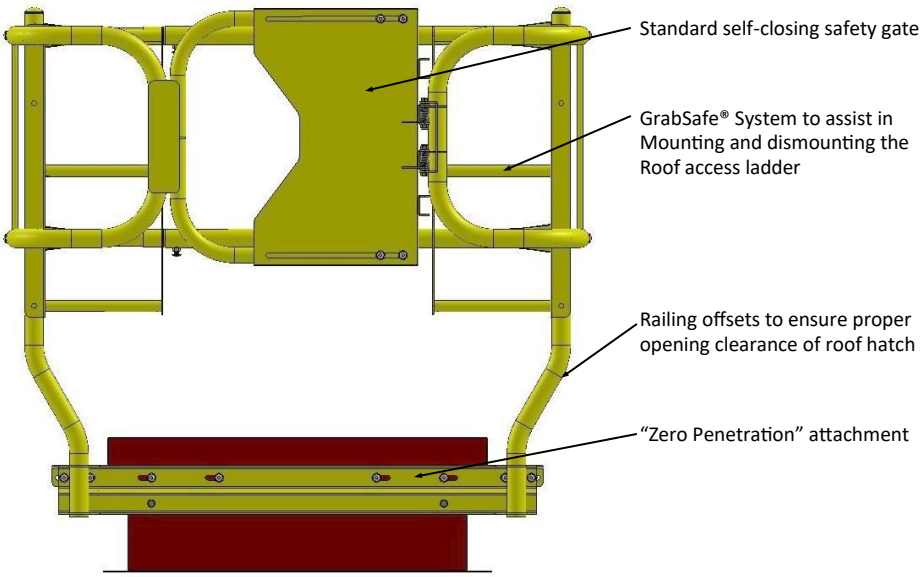


The Roof Hatch Guardrail provides permanent full-perimeter fall protection and improved egress and ingress for all roof hatches. Roof Hatch Guardrail meets and exceeds numerous Standards and requirements for floor openings and walking/working surfaces. Zero Penetration attachment will not damage roof flashings, prevents moisture from entering the building, and will not void the roof warranty. Each unit features patented GrabSafe™ handholds, providing 3-point control throughout egress and ingress. Guardrail extensions create a landing area to ensure safe operation of the self-closing gate while standing on the walking surface, not the ladder.

Our Roof Hatch mounting design will not damage the roof's base flashing, will not allow moisture into the building, and will not void your roof warranty

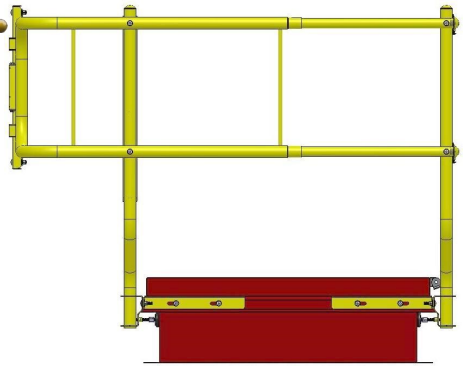

KEY FEATURES

- Fits all brands of roof hatches with cap flashing
- Easy to install
- Self-closing gate
- Adjustable for cap flashing mount or thru-curb mounting
- GrabSafe™ handholds for maximum Safety
- Safe landing area created by rail Extensions
- "Zero Penetration" attachment
- Improved egress and ingress
- Powder coated steel or Hot-Dipped Galvanized
- Made in the U.S.A.
- Meets and Exceeds:
 - OSHA 29 CFR 1910.29
 - OSHA 29 CFR 1926.501
 - OSHA 29 CFR 1926.502
 - Cal-OSHA §3209
 - Cal-OSHA §3212
 - Cal-OSHA §3277
 - ICC Building Codes
 - ANSI/ASSE A1264.1
 - ANSI/ASSE A14.3
 - USACE EM 385-1-1 (21.E.01 a-c)

Leading Edge Safety, LLC.
 1345 Taney Street
 North Kansas City, MO 64116
 888-990-2990
 Sales@LeadingEdgeSafety.net
www.LeadinEdgeSafety.net



Product Name: Roof Hatch Guardrail

Product Description: Roof Hatch Guardrail with patented GrabSafe™ horizontal hand-holds and self-closing gate provides safe egress and ingress through roof hatches in addition to providing protection against accidental falls through the roof opening while the roof hatch is open. GrabSafe™ horizontal hand-holds act as an extension of the ladder for more comfortable and safe climbing and allows easy pass-through to the walking surface. Guardrail extensions create a landing area for safe transition to the roof surface before operating the gate. Self-closing gate ensures full perimeter protection.

Applications: The Roof Hatch Guardrail provides fall protection, improved egress and ingress and compliance for roof hatch openings.

Installation: Roof Hatch Guardrail can be installed on both new and existing roof hatches. Standard installation allows mounting to the vertical cap flashing of the roof hatch without penetrating the roof membrane. Roof hatches without vertical cap flashing thru-bolt the side of the roof hatch and require counter-flashing to conceal fasteners by others.

Materials:

Uprights: 1.625" x .065" steel tube (ASTM C1008/1010) welded to 10 gauge steel (ASTM A1011 CS Type B) bracket with 3/8" pre-punched slots for thru-bolt attachment.

Horizontal Rails: 1.625" x .065" (ASTM C1008/1010) and 1.375" x .065" (ASTM C1008/1010) steel tube adjustable slide rails.

GrabSafe™: 1" x 10.5" steel tube (ASTM A513) welded to 10 gauge steel (ASTM A1011 CS Type B) bracket .

Self-Closing Gate: 1.625" x .065" steel tube (ASTM C1008/1010), 16 gauge steel plate (ASTM A1008 CS Type B)

Finish: Powder coated steel or Hot-Dipped Galvanized

Colors: Numerous colors to match Kynar® sheet metal, building components and RAL colors.

Hardware: 3/8"-16 x 1" zinc plated steel.

Labels: Applicable safety warnings and manufacturer's contact information.

Sizes: Industry standard sizes: 30"x36", 30"x54", 30"x96", 36" x 36", 48" x 48"; other sizes by custom order

Weight: 110 lbs

Standards: Meets and exceeds OSHA Standard 29 CFR 1910.29, 1926.501, 1926.502, Cal-OSHA §1620, §3209, §3212, ICC Building Codes, ANSI/ASEE A1264.1, ANSI/ASSE A14.3, and USACE EM 385-1-1 (21.E.01 a-c)

Warranty: 5 year limited warranty.

Country of Origin: United States of America

AutoCAD details and specifications available at www.LeadingEdgeSafety.net