


The Skylight Guardrail provides permanent 4-sided fall protection around virtually any skylight or smoke vent. Skylight Guardrail meets and exceeds numerous Standards and requirements for floor openings and walking/working surfaces. Two mounting options—Structural skylights mounting thru the aluminum frame or “Zero Penetration” for removable acrylic skylights. Custom designed to fit virtually any size skylight including acrylic skylights, structural skylights and smoke vents. Skylight guardrails provide high-visibility even on snow covered roofs..



KEY FEATURES

- Fits virtually any size skylight
- Easy to install
- Installs under acrylic dome skylight flashings for “Zero Penetration” attachment
- Adjustable rails to fit specific needs
- 4-sided permanent protection
- Prevents sitting or standing on skylights
- Adaptable for smoke vent applications
- Powder coated or Hot-Dipped Galvanized finish
- High-visibility ‘safety yellow’ or custom colors
- Made in the U.S.A.
- Meets and Exceeds:
 - OSHA 29 CFR 1910.29
 - OSHA 29 CFR 1926.501
 - OSHA 29 CFR 1926.502
 - Cal-OSHA §1620
 - Cal-OSHA §3209
 - Cal-OSHA §3212
 - ANSI/ASSE A1264.1-2007 (3.4)
 - USACE EM 385-1-1 (21.E.01 a-c)

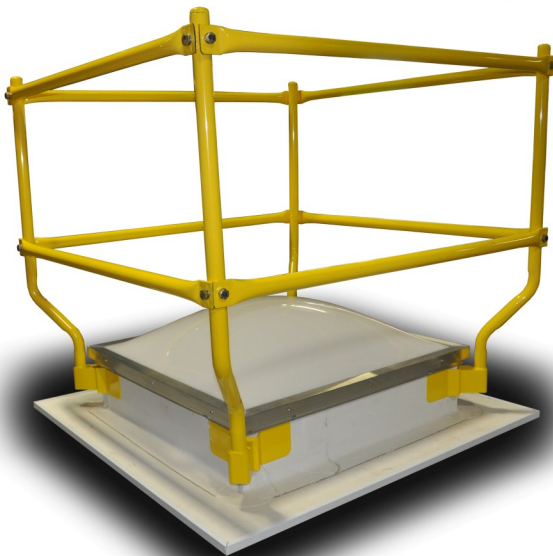

FEATURES

- “ZERO PENETRATION” ATTACHMENT UNDER ACRYLIC DOME SKYLIGHTS
- CONCEALED FASTENERS PREVENT MOISTURE INFILTRATION



Product Name: Skylight Guardrail

Product Description: Skylight Guardrail provides 4-sided permanent protection against accidental falls through acrylic dome skylights, structural skylights, and smoke vent roof openings.

Applications: The Skylight Guardrail provides permanent fall protection for virtually any skylight or smoke vent on the roof.

Installation: Skylight Guardrail can be installed on both new and existing skylights. Standard installation allows mounting under acrylic dome flashings with concealed fasteners. Skylight guardrail can be side mounted to structural skylights and smoke vents.

Materials:

Uprights: 1.625" x .065" steel tube (ASTM C1008/1010) welded to 2" x 3" x 3.5" steel (ASTM A36) block and 1/4" steel (ASTM A36) bracket with 3/8" pre-punched slots for attachment.

Horizontal Rails: 1.625" x .065" (ASTM C1008/1010) and 1.375" x .065" (ASTM C1008/1010) steel tube adjustable slide rails.

Finish: Powder coated steel or Hot-Dipped Galvanized to ASTM A123

Colors: High-visibility 'Safety Yellow' and numerous colors to match Kynar® sheet metal, building components and RAL colors.

Hardware: 3/8"-16 x 1" zinc plated fasteners.

Labels: Applicable safety warnings and manufacturer's contact information.

Sizes: Custom designed to fit virtually any size acrylic dome skylight, structural skylight, or smoke vent

Weight: Contact Premier Rail Systems for weights based on unit size.

Standards: Meets and exceeds OSHA 29 CFR 1910.29, 1926.501, 1926.502, Cal-OSHA §1620, §3209, §3212, ANSI/ASSE A1264.1-2007 (3.4), and USACE EM 385-1-1 (21.E.01 a-c)

Warranty: 1 year manufacturer's limited warranty covering manufacturing defects.

Country of Origin: United States of America

AutoCAD details and specifications available at www.LeadingEdgeSafety.net