


The Skylight Screen Fall Protection provides permanent fall protection at skylights and does not penetrate the roof membrane. "Zero Penetration" attachment will not damage roof flashings, prevents moisture from entering the building, and will not void the roof warranty. Galvanized screens install quickly and easily to ensure long-term performance, safety and compliance. Skylight Screen Fall Protection meets and exceeds numerous Standards and requirements for skylight openings and ensures OSHA compliance.



KEY FEATURES


- Fits virtually any acrylic dome skylight
- Easy to install
- Low-cost protection
- "Zero Penetration" attachment
- Permanent protection
- Galvanized finish
- Made in the U.S.A.
- Meets and Exceeds:
  - OSHA 29 CFR 1910.29
  - OSHA 29 CFR 1926.501
  - Cal-OSHA §1632
  - Cal-OSHA §3212
  - ANSI/ASSE A1264.1-2007

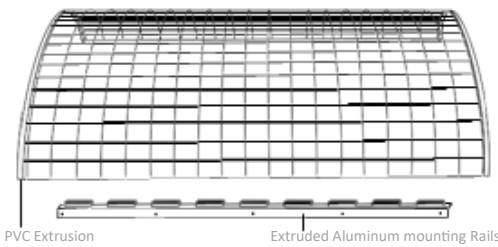




FEATURES

- 3" X 4" HOT DIPPED GALVANIZED WELDED WIRE MESH
- EXTRUDED ALUMINUM MOUNTING RAILS
- "ZERO PENETRATION" MOUNTING
- FAST INSTALLATION

STANDARD MOUNT



REVERSE MOUNT

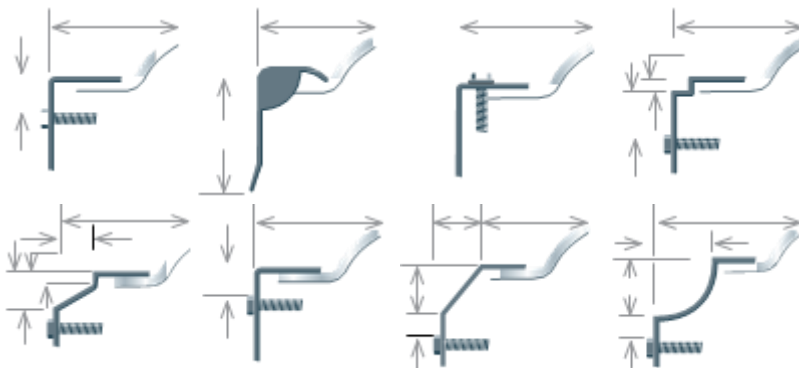

Leading Edge Safety, LLC.  
 1345 Taney Street  
 North Kansas City, MO 64116  
 888-990-2990  
 Sales@LeadingEdgeSafety.net  
[www.LeadingEdgeSafety.net](http://www.LeadingEdgeSafety.net)



**Product Name:** Skylight Screen Fall Protection

**Product Description:** Skylight Screen Fall Protection provides cost-effective fall protection for both new and existing skylight units. Galvanized screens and aluminum mounting rails install quickly and easily to ensure long-term performance, safety, and compliance.

**Applications:** Skylight Screens provide fall protection for both new and existing skylight units.

**Installation:** Skylight Screens can be installed on both new and existing skylight units. Standard installation allows mounting to the skylight frame without penetrating the roof membrane.

**Materials:**

**Screen:** 3" x 4" welded wire mesh, .195"

**Extrusion:** Outdoor PVC, extruded

**Retaining Clips:** Stainless Steel

**Finish:** Galvanized ASTM A123

**Hardware:** Galvanized 3/4" #12 hex washer head self-drilling screws.

**Labels:** Applicable safety warnings and manufacturer's contact information.

**Sizes:** 8' wide x unlimited lengths

**Weight:** 1.5 lb/sf

**Standards:** Meets and exceeds OSHA Standard CFR 29 1910.29, 1926.501, Cal-OSHA §1632, §3212, ANSI/ASSE A1264.1-2007

**Warranty:** 1 year manufacturer's limited warranty covering manufacturing defects.

**Country of Origin:** United States of America

AutoCAD details and specifications available at [www.LeadingEdgeSafety.net](http://www.LeadingEdgeSafety.net)