


The Standing Seam Ladder to Roof Access Point provides permanent fall protection, a controlled access zone, and safer step-on and step-off for both temporary and fixed ladder points. "Zero Penetration" attachment with pre-engineered S-5 clamps ensuring solid and maintenance free installation without penetrating the roof panels. Powder coated steel colors available to match Kynar® sheet metal or other building components and RAL colors.

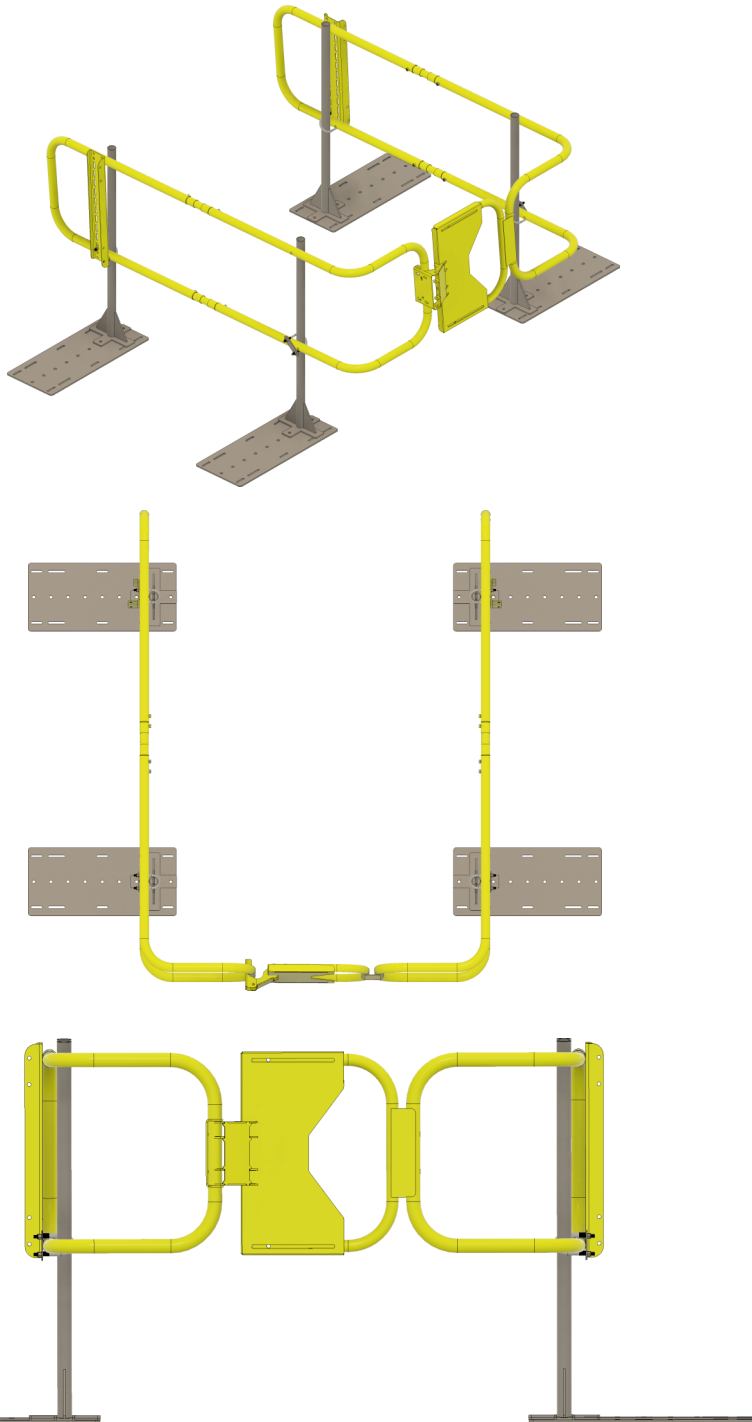

KEY FEATURES

- Permanent and compliant controlled access zone.
- Easy to install
- Self-closing gate
- Safe landing area created by rail extensions
- 100% water-tight installation
- Improved egress and ingress
- Powder coated steel or Hot-Dip Galvanized
- Made in the U.S.A.
- Meets and Exceeds:

- OSHA 29 CFR 1910.23
- OSHA 29 CFR 1910.27
- OSHA 29 CFR 1926.501
- OSHA 29 CFR 1926.502
- Cal-OSHA §3209
- Cal-OSHA §3212
- Cal-OSHA §3277
- ANSI/ASSE A1264.1-2007
- USACE EM 385-1-1 (21.E.01 a-c)

<b>Product Name:</b>	Standing Seam Ladder to Roof Access Point
<b>Product Description:</b>	Standing Seam Ladder to Roof Access Point provides permanent fall protection, a controlled access zone, and safer step-on and step-off for both temporary and fixed ladder points. Each unit features "Zero Penetration" attachment with pre-engineered S-5 clamps ensuring solid and maintenance free installation without penetrating the roof panels.
<b>Applications:</b>	The Standing Seam Ladder to Roof Access Point provides fall protection and a controlled access zone at ladder points around the roof.
<b>Installation:</b>	Standing Seam Ladder to Roof Access Point can be installed at both new and existing ladder points without penetrating the roof panel. Attachment with pre-engineered S-5 clamps ensuring solid and maintenance free installation without penetrating the roof panels.
<b>Materials:</b>	
<b>Uprights:</b>	1.66" x .140" schedule 40 pipe (ASTM A53) welded to 3/16" steel plate (ASTM A36) bracket with pre-punched slots for permanent structural attachment.
<b>Horizontal Rails:</b>	1.625" x .065" (ASTM C1008/1010) and 1.375" x .065" (ASTM C1008/1010) steel tube adjustable slide rails.
<b>GrabSafe™:</b>	1" x 5.5" steel tube (ASTM A513) welded to 10 gauge steel (ASTM A1011 CS Type B) bracket.
<b>Self-Closing Gate:</b>	1.625" x .065" steel tube (ASTM C1008/1010), 16 gauge steel plate (ASTM A1008 CS Type B)
<b>Bases:</b>	12 gauge steel plate (ASTM A1008 CS Type B)
<b>Finish:</b>	Powder coated steel or Hot-Dipped Galvanized.
<b>Colors:</b>	Numerous colors to match Kynar® sheet metal, building components and RAL colors.
<b>Hardware:</b>	3/8"-16 x 1" zinc plated steel.
<b>Labels:</b>	Applicable safety warnings and manufacturer's contact information.
<b>Sizes:</b>	5'-6" w x 4'-8" to 6'-11" adjustable
<b>Weight:</b>	230 lbs
<b>Standards:</b>	Meets and exceeds OSHA Standard 29 CFR 1910.23, 1910.27, 1926.501, 1926.502, Cal-OSHA §1620, §3209, §3212, §3277, ANSI/ASSE A1264.1-2007, and USACE EM 385-1-1 (21.E.01 a-c)
<b>Warranty:</b>	1 year manufacturer's limited warranty covering manufacturing defects.
<b>Country of Origin:</b>	United States of America

AutoCAD details and specifications available at [www.LeadingEdgeSafety.net](http://www.LeadingEdgeSafety.net)