


Standing Seam Warning Line system, designed specifically for your project, is a fast easy, and economical way to erect warning lines on metal roofs. Permanent warning lines designate work areas and alert workers of dangerous conditions to prevent accidents. The Standing Seam Warning Line system attaches to structural metal panels with pre-engineered S-5 clamps ensuring solid and maintenance free installation without penetrating the roof panels.

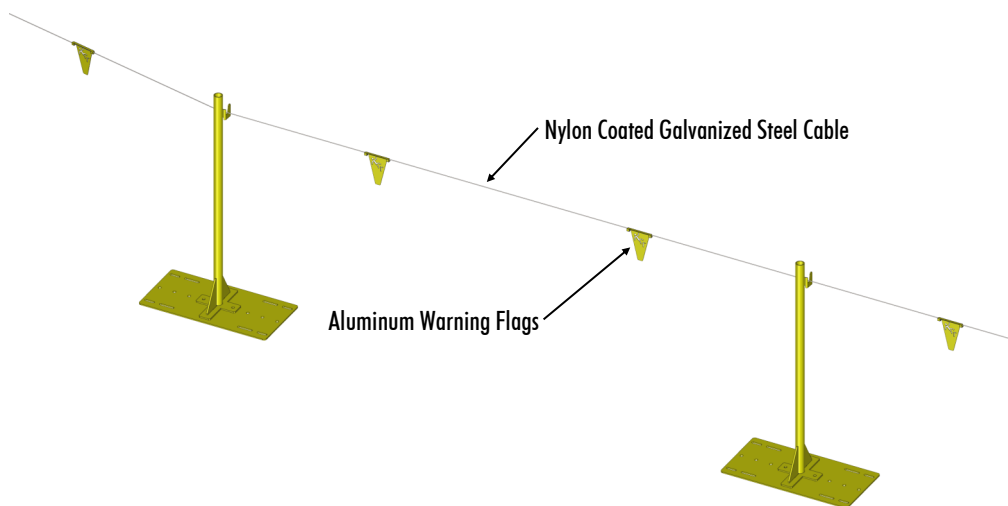


Universal base plate fits 24", 18", 16" & 12"

Base plate mounting holes allow for off-center attachment of the upright.

Warning line clips ensure fast and easy installation while securing cable.

Securely mount to standing seam panels using pre-engineered S-5 mounting clamps.

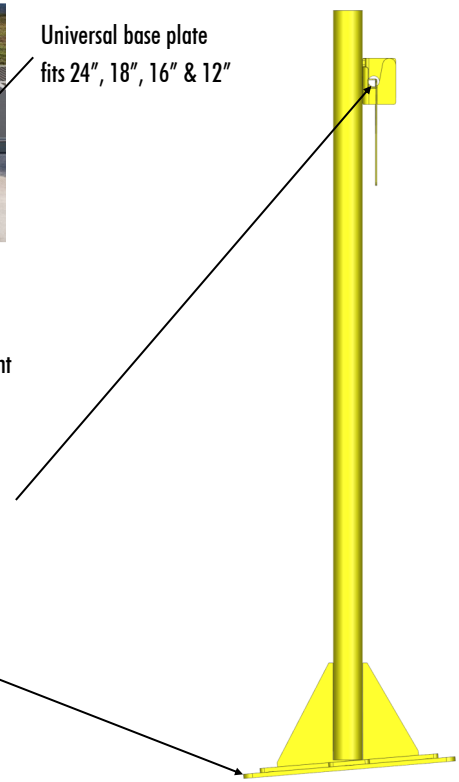

KEY FEATURES

- Permanent flagging system
- Easy to install and use
- "Zero Penetration" attachment
- 100% water-tight installation
- Quick-connect cable system
- Pre-engineered mounting system
- Cost effective safety solution
- Optional colors to match building components***
- Hot-dipped galvanized finish
- Made in the U.S.A.
- Meets and Exceeds

OSHA 29 CFR 1910.29

OSHA 29 CFR 1926.501

OSHA 29 CFR 1926.502

Product Name:	Standing Seam Warning Line
Product Description:	Standing Seam Warning Line system, designed specifically for your project, is a fast easy, and economical way to erect warning lines on metal roofs. Permanent warning lines designate work areas and alert workers of dangerous conditions to prevent accidents. The Standing Seam Warning Line system attaches to structural metal panels with pre-engineered S-5 clamps ensuring solid and maintenance free installation without penetrating the roof panels.
Applications:	Standing Seam Warning Line system creates designated work areas for low-slope metal roofs.
Installation:	Standing Seam Warning Line system can be installed on both new and existing metal roofs without penetrating the roof panels.
Materials:	
Uprights:	1.66" x .140" schedule 40 pipe (ASTM A53) mounted to 1/4" x 12" x 26" base plates (ASTM A36) with pre-punched holes and slots for permanent structural attachment.
Finish:	Hot-Dipped Galvanized to ASTM A123.
Flags:	4" x 6" triangular shape aluminum with folding tabs.
Colors:	***Optional powder coat Safety Yellow, colors to match Kynar sheet metal, building components, and RAL colors over Hot-Dipped Galvanize. ***Additional costs apply
Cable:	5/32" (7/19) nylon coated galvanized wire rope.
Labels:	Applicable safety warnings and manufacturer's contact information.
Sizes:	<u>Uprights:</u> 39" Clip height for warning line per OSHA Standards. <u>Cable:</u> Up to 250' continuous lengths.
Weight:	<u>Uprights:</u> 25 lbs +/- <u>Cable:</u> 0.06 lbs / lineal foot +/- <u>Flags:</u> 0.125 lbs +/-
Standards:	Meets and exceeds OSHA Standard 29 CFR 1910.29, 1926.501, 1926.502
Warranty:	1 year manufacturer's limited warranty covering manufacturing defects.
Country of Origin:	United States of America

AutoCAD details and specifications available at www.LeadingEdgeSafety.net